


JM TWO PART UIA (URETHANE INSULATION ADHESIVE CANISTER) IS APPLIED TO THE SUBSTRATE ON HORIZONTAL AND VERTICAL SURFACES.

IMMEDIATELY AFTER APPLYING THE SPATTER PATTERN OF TWO PART UIA ONTO THE HORIZONTAL SUBSTRATE, APPLY TWO RIBBONS OF TWO PART UIA CANISTER ONTO THE HORIZONTAL SUBSTRATE BASE TIE-IN. PUSH THE MEMBRANE TIGHT INTO THE CORNER WITH A WOOD 2X. DO NOT FOLD OR CREASE THE MEMBRANE. APPLY A SPATTER PATTERN OF TWO PART UIA ONTO THE VERTICAL SUBSTRATE AND IMMEDIATELY APPLY THE MEMBRANE TO THE VERTICAL SUBSTRATE AND SMOOTH IN BY HAND THEN BROOM OR ROLL IT IN. SEE THE JM TWO PART URETHANE INSULATION ADHESIVE CANISTER OPERATING INSTRUCTIONS FOR FURTHER INFORMATION.

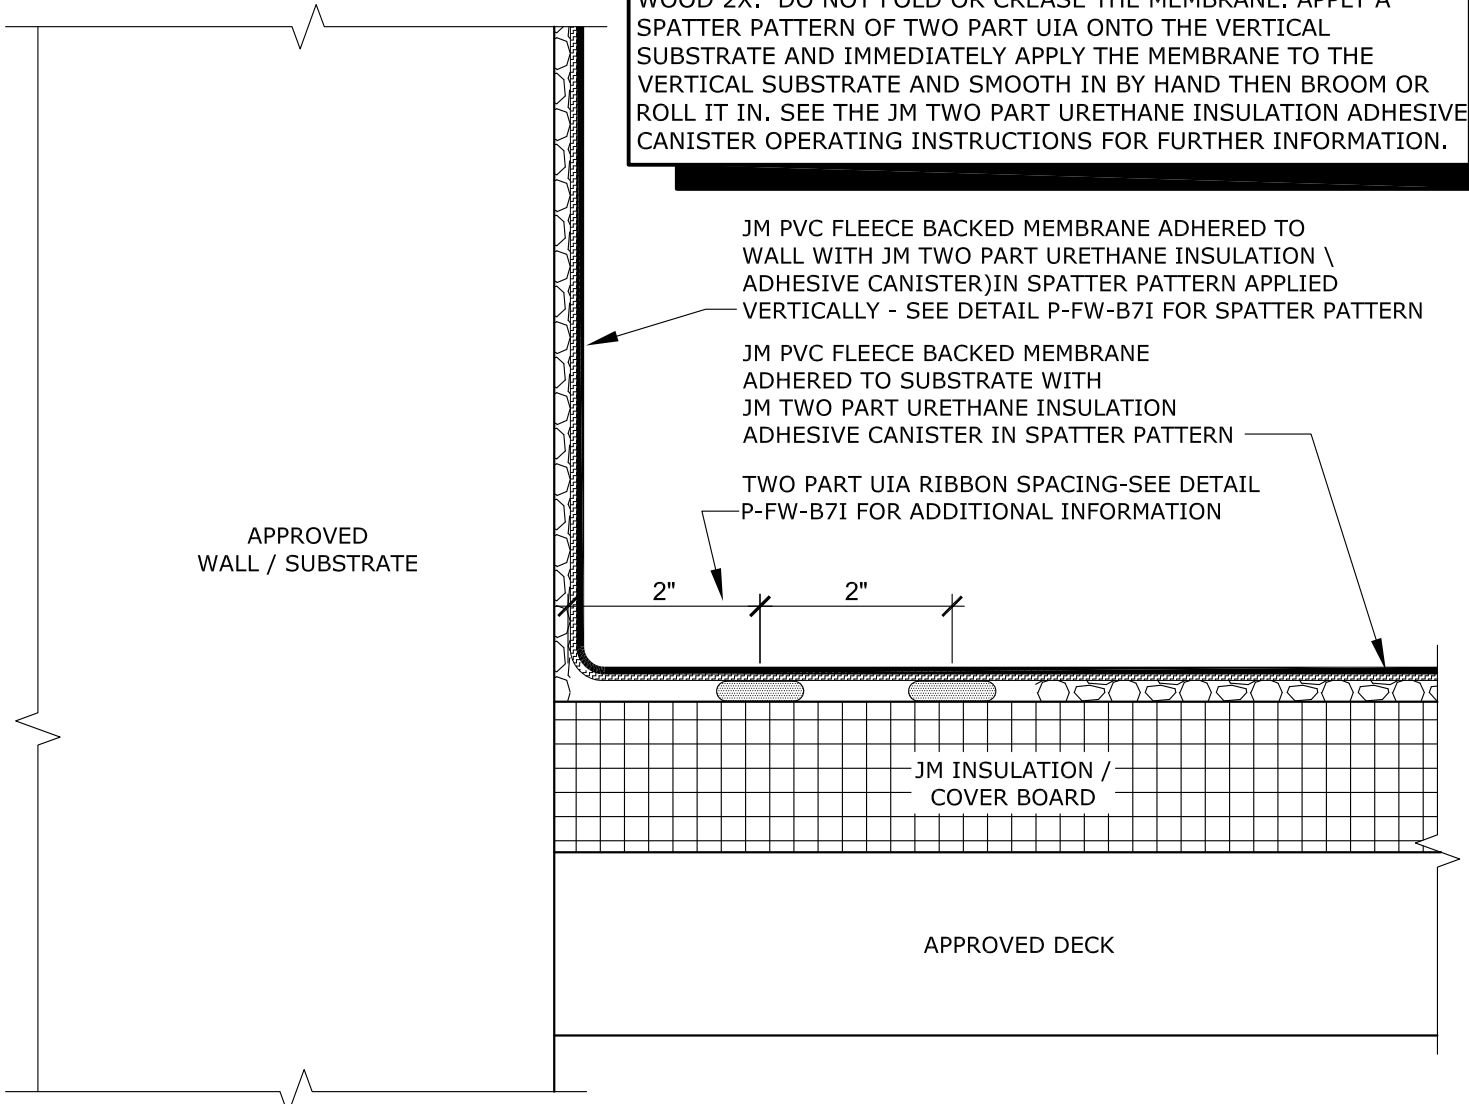

JM PVC FLEECE BACKED MEMBRANE ADHERED TO WALL WITH JM TWO PART URETHANE INSULATION \ ADHESIVE CANISTER)IN SPATTER PATTERN APPLIED VERTICALLY - SEE DETAIL P-FW-B7I FOR SPATTER PATTERN

JM PVC FLEECE BACKED MEMBRANE ADHERED TO SUBSTRATE WITH JM TWO PART URETHANE INSULATION ADHESIVE CANISTER IN SPATTER PATTERN

TWO PART UIA RIBBON SPACING-SEE DETAIL P-FW-B7I FOR ADDITIONAL INFORMATION

APPROVED WALL / SUBSTRATE

2" 2"

JM INSULATION / COVER BOARD

APPROVED DECK

**NOTES:**

1. REFER TO JOHNS MANVILLE WEBSITE ([www.jm.com](http://www.jm.com)) FOR MOST UP-TO-DATE INFORMATION.
2. PLEASE SEE SINGLE PLY FLASHING SPECIFICATIONS FOR A FULL DESCRIPTION OF INSTALLATION INSTRUCTIONS AND REQUIREMENTS WHICH ARE CONSIDERED A PART OF THIS DETAIL.
3. ANY CARPENTRY OR METAL WORK SHOULD BE DESIGNED AND CONSTRUCTED IN ACCORDANCE WITH LOCAL CODE REQUIREMENTS AND/OR PROJECT SPECIFICATIONS. THESE COMPONENTS SHOULD BE REVIEWED AND APPROVED BY A LICENSED DESIGN PROFESSIONAL.
4. FOR JM APPROVED INTERMEDIATE FLASHING FASTENING METHODS SEE P-FW-I DETAILS. INTERMEDIATE ADHERED MEMBRANE FASTENING REQUIRED AT 5'-0" (1.52 m) INTERVALS MAXIMUM, SEE DETAIL P-FW-M2I FOR JM APPROVED FASTENING METHODS.
5. PLEASE SEE DETAIL P-FW-B7I FOR ADDITIONAL INSTALLATION INFORMATION.
6. JM PVC EDGE SEALANT IS OPTIONAL ON CUT OR NON ENCAPSULATED EDGES OF PVC REINFORCED MEMBRANE. THIS INCLUDES FACTORY CUT MEMBRANE.

DRAWING NO.

**P-FW-B7**

FLASHING WALL

**BASE TIE-IN FLEECE BACKED PVC IN 2 PART UIA SPATTER**

MEMBRANE TYPE:  
PVC FLEECE BACKED

SCALE  
N.T.S

ISSUE DATE  
08-07-19

MAXIMUM GUARANTEE TERM:  
30 YR.

Johns Manville is a manufacturer of commercial roofing products and offers this general conceptual information to you as a courtesy. This complimentary assistance is not to be used or relied upon by anyone as a substitute for professional engineering design and documentation required by building code, contract, or applicable law. By accepting these comments you agree they do not constitute any representations, endorsements of, or an assumption by Johns Manville of any liability for either the adequacy of the design of this building or any other material not supplied by Johns Manville.

