


Features and Components

The UltraFast Pre-Assembled Fastener is a #12, case-hardened steel, polymer-coated fastener with a buttress thread design that provides maximum pullout values and minimizes fastener backout. Available with a #3 Phillips head or 1/4" (6.35 mm) hex head (available by special order only). The drill point is designed for quick installation in new or re-roof applications, and provides exceptional drilling capability in higher tensile decks. The UltraFast Locking Plastic Plate prevents fastener pop-up.

- Use:** Insulation
- Material:** Fasteners - Case-Hardened Steel, Polymer-Coated
Plates - Galvalume®*-Coated Steel or Plastic
- Gauge:** #12
- Head:** #3 Phillips Head (1/4" (6.35 mm) Hex Head is available by special order only)
- Plates:** 3" (7.62 cm) Round Locking Plastic or Round Metal
- Colors:** Blue (fasteners), Grey (metal plates), Blue (plastic plates)
- Deck Types:** Wood or 18 - 24 gauge (1.25 mm - 0.56 mm) Metal.

* Galvalume is a registered trademark of BIEC International, Inc. and some of its licensed producers.

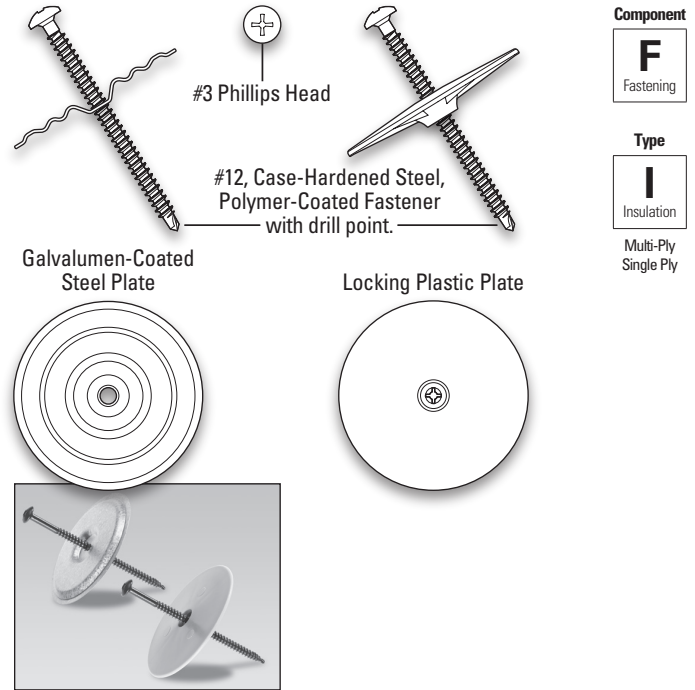

System Compatibility This product may be used as a component in the following systems. Please reference product application for specific installation methods and information.

Multi-Ply	BUR		APP		SBS				
	HA	CA	CA	HW	HA	CA	HW	CA	MF
<i>Use to fasten Insulation in all Multi-Ply systems</i>									

Single Ply	TPO		PVC		EPDM		
	MF	FA	MF	FA	MF	FA	BA
<i>Use to fasten Insulation in the selected Single Ply systems above</i>							

Key: HA = Hot Applied CA = Cold Applied HW = Heat Weldable SA = Self Adhered MF = Mechanically Fastened FA = Fully Adhered BA = Ballasted

Energy and the Environment

Recycled Content	This steel based product contains a minimum of 25% post consumer recycled materials by weight
------------------	---

Peak Advantage® Guarantee Information

Systems	Guarantee Term
When used in 60 to 80 mil JM TPO systems*	20 years

* Approved to use with any Peak Advantage Guarantee.

Codes and Approvals*



*Fastener approvals are based on system approvals

Installation/Application

The UltraFast Pre-Assembled must penetrate steel decks a minimum of 3/4", wood plank decks a minimum of 1". and 1/2" through the underside for plywood decks. Drive the fastener until a slight depression is seen around the plate, or with very rigid insulation boards, drive until the plate begins to dimple.

Packaging and Dimensions

Sizes	Quantity/Container
Fasteners: 1 1/8" to 8" (4.13 cm to 20.32 cm) length A bit is provided in each box	1,000/box
Plates: 3" (7.6 cm) Round Metal or Plastic	
Producing Locations*	Agawam, MA & Itasca, IL

* The point of manufacture for fasteners and plates varies depending on the specific part. Call your local JM sales professional for assistance.