

ROLL PATCHES INTO SEAMS WITH HAND ROLLER UNDER PRESSURE AND CREASE INTO SEAMS ACCORDING TO THE JM EPDM APPLICATION GUIDE

APPLY JM SINGLE PLY LVOC CAULK UNDER THE PATCH AT T-JOINT INTERSECTION

JM EPDM PEEL & STICK T-JOINT PATCH

JM FASTENERS & PLATES CENTERED UNDER SEAM TAPE

JM EPDM 6" SEAM TAPE-EXPOSE 1/8" TO 1/4" SEE NOTE 4

JM EPDM REINFORCED MEMBRANE MECHANICALLY FASTENED

JM APPROVED FASTENERS & PLATES CENTERED UNDER SEAM TAPE PENETRATION DEPENDANT ON DECK MATERIAL(S). SEE SPECIFICATIONS FOR FURTHER INFORMATION

JM EPDM TAPE PRIMER SEE NOTE 5

JM EPDM 6" SEAM TAPE-EXPOSE 1/8" TO 1/4" - SEE NOTE 4


JM EPDM MEMBRANE MECHANICALLY FASTENED

**ISOMETRIC VIEW T-JOINT**

JM EPDM 6" SEAM TAPE-EXPOSE 1/8" TO 1/4" SEE NOTE 4

JM EPDM TAPE PRIMER SEE NOTE 5

JM SINGLE PLY LVOC CAULK ALL AROUND T-JOINT PATCH

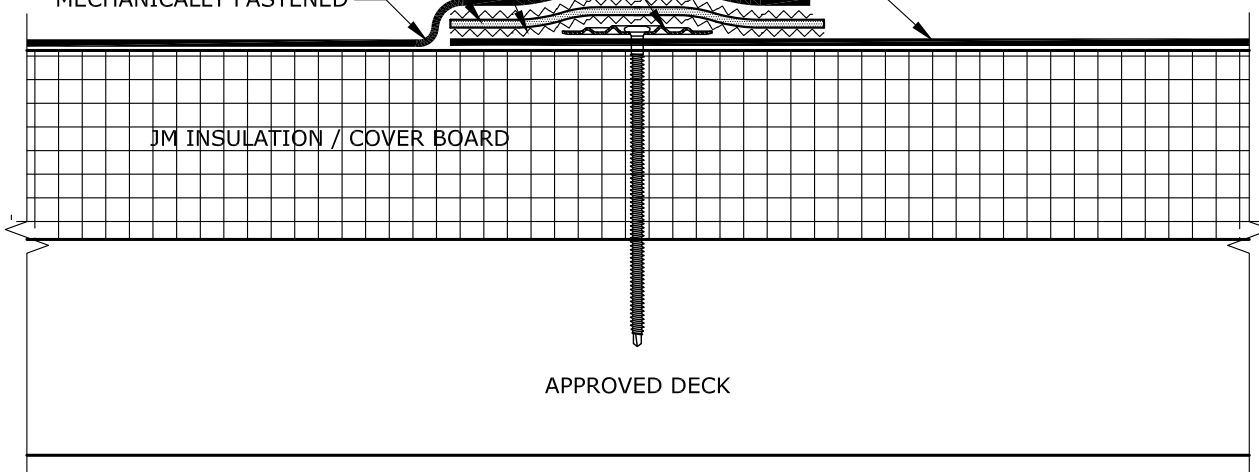

**NOTES:**

1. REFER TO JOHNS MANVILLE WEBSITE ([www.jm.com](http://www.jm.com)) FOR MOST UP-TO-DATE INFORMATION.
2. PLEASE SEE SINGLE PLY FLASHING SPECIFICATIONS FOR A FULL DESCRIPTION OF INSTALLATION INSTRUCTIONS AND REQUIREMENTS WHICH ARE CONSIDERED A PART OF THIS DETAIL.
3. ANY CARPENTRY OR METAL WORK SHOULD BE DESIGNED AND CONSTRUCTED IN ACCORDANCE WITH LOCAL CODE REQUIREMENTS AND/OR PROJECT SPECIFICATIONS. THESE COMPONENTS SHOULD BE REVIEWED AND APPROVED BY A LICENSED DESIGN PROFESSIONAL.
4. 1/8" TO 1/4" OF JM EPDM SEAM TAPE MUST BE EXPOSED ALONG ENTIRE LENGTH OF ALL SEAMS.
5. JM EPDM TAPE PRIMER OR JM SINGLE PLY MEMBRANE PRIMER (LOW VOC) MUST BE APPLIED ON ALL SURFACES COMING INTO CONTACT WITH JM EPDM PEEL & STICK PRODUCTS. ROLL MEMBRANE WITH HAND ROLLER UNDER PRESSURE AT SEAM IN ACCORDANCE WITH THE JM EPDM INSTALLATION GUIDE.

DRAWING NO.

**E-MS-05**

REPLACES EL-4T

**IN LAP FASTENING METHOD-MECHANICALLY ATTACHED**

MEMBRANE TYPE:  
JM EPDM

MAXIMUM GUARANTEE TERM:  
20 YEAR

SCALE  
N.T.S

ISSUE DATE  
1-10-17

Johns Manville is a manufacturer of commercial roofing products and offers this general conceptual information to you as a courtesy. This complimentary assistance is not to be used or relied upon by anyone as a substitute for professional engineering design and documentation required by building code, contract, or applicable law. By accepting these comments you agree they do not constitute any representations, endorsements of, or an assumption by Johns Manville of any liability for either the adequacy of the design of this building or any other material not supplied by Johns Manville.

