

## MINWOOL-1200® LAMELLA TANK WRAP

MinWool-1200 Lamella Tank Wrap is a water-repellent, flexible mineral wool wrap insulation. Lightweight, high-performance Insulation for high-temperature applications. Lamella Tank Wrap is available in 4-pound, 6-pound and 8-pound densities. It is a perpendicular-oriented fiber insulation manufactured from mineral wool. It is produced to fit large diameter pipe, duct, tanks and equipment ranging in temperatures from below ambient up to 1200°F continuous maximum service temperature, complies with requirements of new ASTM C1393 material specification.

### ADVANTAGES

**Water-Repellent.** MinWool-1200 Lamella Tank Wrap is water-repellent to help mitigate the risk of water intrusion. MinWool-1200 Lamella Tank Wrap performs in accordance with BS EN 1609:2013, absorbing less than 0.35 kg/m<sup>2</sup> of water during water absorption tests at temperatures up to 425°F (218°C).

**Thermal Performance.** Good thermal conductivity values help maximize control of heat loss, contributing to reduced operating costs and greater energy savings.

**Light Weight, Low Dust, Protected Outer Surface.** Easy to handle and fabricate, Lamella Tank Wrap insulation is easy to cut with a knife. Clean handling properties and factory applied facers help reduce skin irritation and minimize job cleanup time and expense.

**Mold Resistant.** Lamella Tank Wrap insulation does not support the growth of fungi.

### APPLICATIONS

Lamella Tank Wrap insulation is perfect for large diameter pipe, ducts and equipment. Packaged in polyethylene bags for easy handling and storage and proven as an ideal maintenance stock item. Can adapt to nearly any size line in a facility to provide thermal performance and personnel protection. Installs easily with appropriate sealing tape, tie-wire, or metal bands with normal insulator's tools.

### AVAILABLE FORMS AND SIZES

#### Standard Thicknesses

Single Layer- 1" thick up to 4" thick.

#### Facings Available

Standard is fiberglass mat  
 Available with ASJ and FSK

#### Linear Shrinkage After 24 Hours at Temperature

Temperature		Shrinkage (%)
°F	°C	
1050	566	0
1200	649	<2



Operating Temperature Limit: 1200°F (650°C)

### SPECIFICATION COMPLIANCE


ASTM C447 Maximum Service Temperature	1200°F (650°C)
ASTM C1393 Material Specification	Complies
ASTM C585 Dimensions of Pipe Insulation	Passes
ASTM C795/C871/C692 Corrosion: Austenitic Stainless Steel	Passes
ASTM C1335 Shot Content	<25%
ASTM C1338 Fungi Resistance	Passes
ASTM E84 Surface Burning Characteristics	Flame Spread - 25 Smoke Developed - 50 or less
Recovery after 10% Compression	100%
BS EN 1609:2013 Water Absorption	<0.35 kg/m <sup>2</sup>

# MINWOOL-1200® LAMELLA TANK WRAP

WATER-REPELLENT, HIGH-TEMPERATURE MINERAL WOOL INSULATION

## DATA SHEET

## THERMAL CONDUCTIVITY

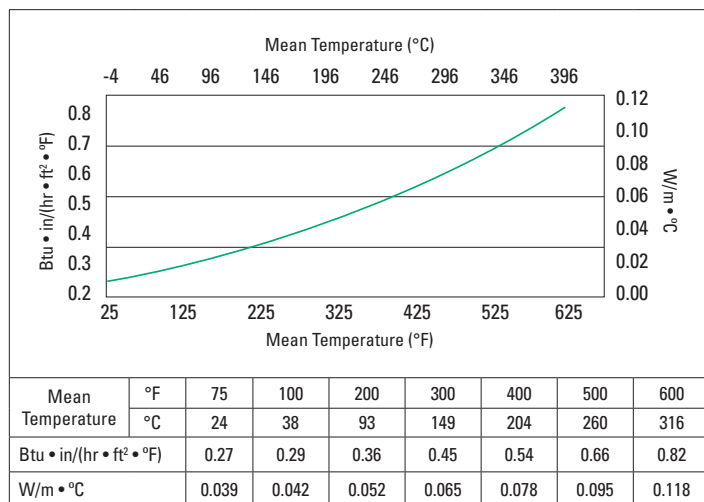

\* MinWool-1200 Lamella Tank Wrap Insulation as tested in accordance with ASTM C518.

## PRODUCT CERTIFICATION

When ordering material to comply with any government specification or any other listed specification, a statement of that fact must appear on the purchase order. Government regulations and other listed specifications require specific lot testing, and prohibit the certification of compliance after shipment has been made. There may be additional charges associated with specification compliance testing. Please refer to IND-CSP-3 for Certification Procedures and Charges. Call customer service for more information.

## QUALITY STATEMENT

Johns Manville products are designed, manufactured and tested to strict quality standards in our own facilities. This along with third party auditing is your assurance that this product delivers consistent high quality.

## ADDITIONAL INFORMATION AND SDS

Please visit our website at [www.jm.com/industrial](http://www.jm.com/industrial)  
Customer Service, Technical & General Information: (800) 866-3234



717 17th St.  
Denver, CO 80202  
(800) 866-3234  
JM.com

Technical specifications as shown in this literature are intended to be used as general guidelines only. Please refer to the Safety Data Sheet and product label prior to using this product. The physical and chemical properties of the MinWool-1200® Lamella Tank Wrap listed herein represent typical, average values obtained in accordance with accepted test methods and are subject to normal manufacturing variations. They are supplied as a technical service and are subject to change without notice. Any references to numerical flame spread or smoke developed ratings are not intended to reflect hazards presented by these or any other materials under actual fire conditions. Check with the Regional Sales Office nearest you for current information.

**All Johns Manville products are sold subject to Johns Manville's standard Terms and Conditions, which includes a Limited Warranty and Limitation of Remedy. For a copy of the Johns Manville standard Terms and Conditions or for information on other Johns Manville thermal insulation and systems, visit [www.jm.com/terms-conditions](http://www.jm.com/terms-conditions) or call (800) 654-3103.**