


ROLL PATCHES INTO SEAMS WITH
HAND ROLLER UNDER PRESSURE
AND CREASE INTO SEAMS
ACCORDING TO THE JM EPDM
APPLICATION GUIDE

12" x 12" (304 mm X 304 mm)
PATCH CUT FROM JM EPDM 12"
PEEL & STICK FLASHING

APPLY JM SINGLE PLY LVOC
CAULK UNDER THE PATCH
AT T-JOINT INTERSECTION

JM EPDM PEEL & STICK
T-JOINT PATCH UNDER
TOP PATCH

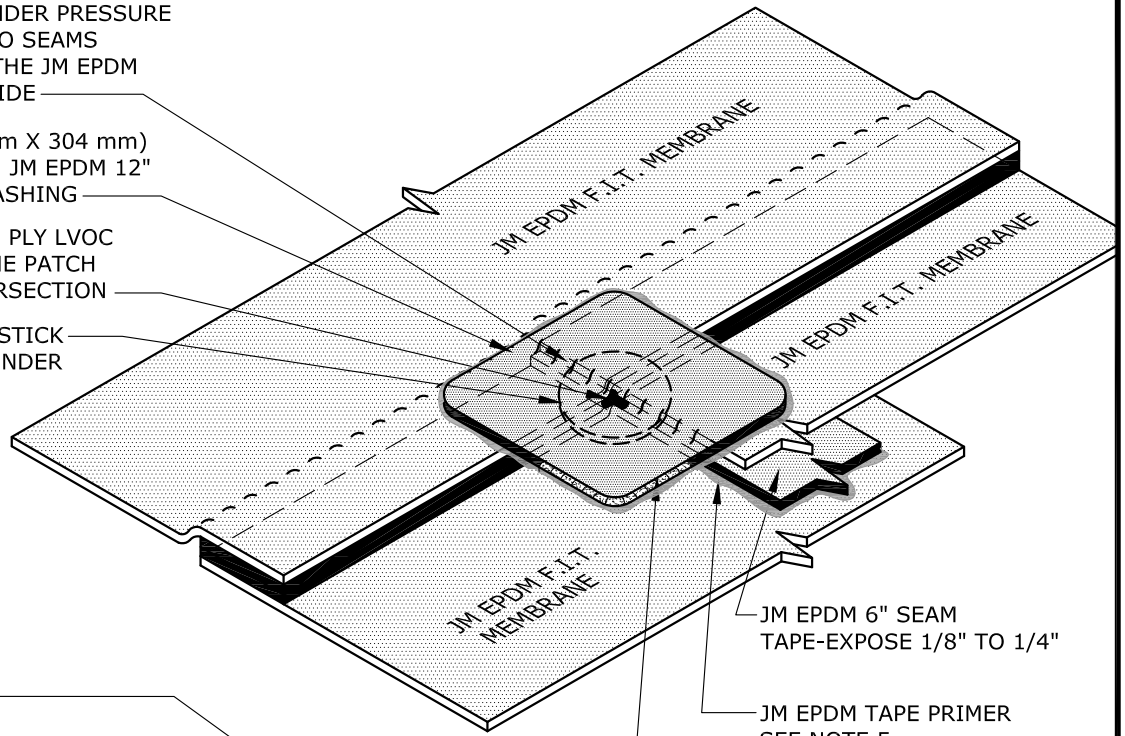

JM EPDM F.I.T. MEMBRANE
WITH 6" FACTORY IN-SEAM
TAPE ADHERED

JM EPDM F.I.T. MEMBRANE
WITH 6" FACTORY IN-SEAM
TAPE ADHERED


JM EPDM MEMBRANE
ADHESIVE (FOR ADHERED
SPECIFICATIONS ONLY)

JM EPDM 6" SEAM
TAPE-EXPOSE 1/8" TO 1/4"

JM EPDM TAPE PRIMER
SEE NOTE 5

JM SINGLE PLY CAULK ALL
AROUND T-JOINT PATCH

ISOMETRIC VIEW T-JOINT

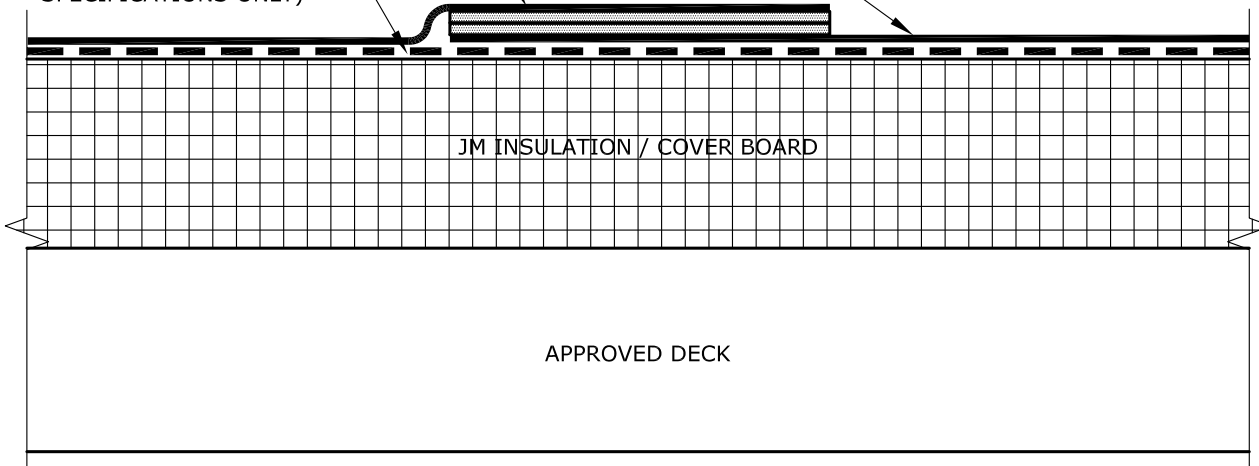

JM INSULATION / COVER BOARD

APPROVED DECK

NOTES:

1. REFER TO JOHNS MANVILLE WEBSITE (www.jm.com) FOR MOST UP-TO-DATE INFORMATION.
2. PLEASE SEE SINGLE PLY FLASHING SPECIFICATIONS FOR A FULL DESCRIPTION OF INSTALLATION INSTRUCTIONS AND REQUIREMENTS WHICH ARE CONSIDERED A PART OF THIS DETAIL.
3. ANY CARPENTRY OR METAL WORK SHOULD BE DESIGNED AND CONSTRUCTED IN ACCORDANCE WITH LOCAL CODE REQUIREMENTS AND/OR PROJECT SPECIFICATIONS. THESE COMPONENTS SHOULD BE REVIEWED AND APPROVED BY A LICENSED DESIGN PROFESSIONAL.
4. ON DAYS WITH TEMPERATURES GREATER THAN 85° WHERE SHEETS ARE ALIGNED PRIOR TO RELAXING, OVERLAP SHALL BE 5" FOR 6" SEAM TAPE TO ALLOW FOR PROPER SEAM ENGAGEMENT.
5. JM EPDM TAPE PRIMER OR JM SINGLE PLY MEMBRANE PRIMER (LOW VOC) MUST BE APPLIED ON ALL SURFACES COMING INTO CONTACT WITH JM EPDM PEEL & STICK PRODUCTS.
ROLL MEMBRANE WITH HAND ROLLER UNDER PRESSURE AT SEAM IN ACCORDANCE WITH THE JM EPDM INSTALLATION GUIDE.

DRAWING NO.

E-MS-PT7

EPDM MEMBRANE TAPE / TAPE SIDE LAP & T-JOINT 30 YEAR

NEW DETAIL

MEMBRANE TYPE:
JM EPDM

SCALE
N.T.S

ISSUE DATE
7-10-17

MAXIMUM GUARANTEE TERM:
30 YEAR

Johns Manville is a manufacturer of commercial roofing products and offers this general conceptual information to you as a courtesy. This complimentary assistance is not to be used or relied upon by anyone as a substitute for professional engineering design and documentation required by building code, contract, or applicable law. By accepting these comments you agree they do not constitute any representations, endorsements of, or an assumption by Johns Manville of any liability for either the adequacy of the design of this building or any other material not supplied by Johns Manville.

