

Meets the requirements of ASTM D 6164, Type 1, Grade S


Features and Components

DynaBase PR is used as a polyester-reinforced base or ply sheet in a variety of multi-ply roofing systems.

High-Quality SBS Rubber and Asphalt Blend: Lends elasticity and flexibility to the sheet. The elongation and recovery properties allow the product to easily accommodate the continual expansion and contraction experienced on all roofs.

Polyester-Reinforcement Mat: Polyester mat with glass-scrim reinforcement offers robust tear strength and puncture resistance, allowing for high wind performance and an excellent hail rating. The sheet also exhibits strong dimensional stability and enhanced elongation.

Surfacing: Fine mineral parting agent on both sides.

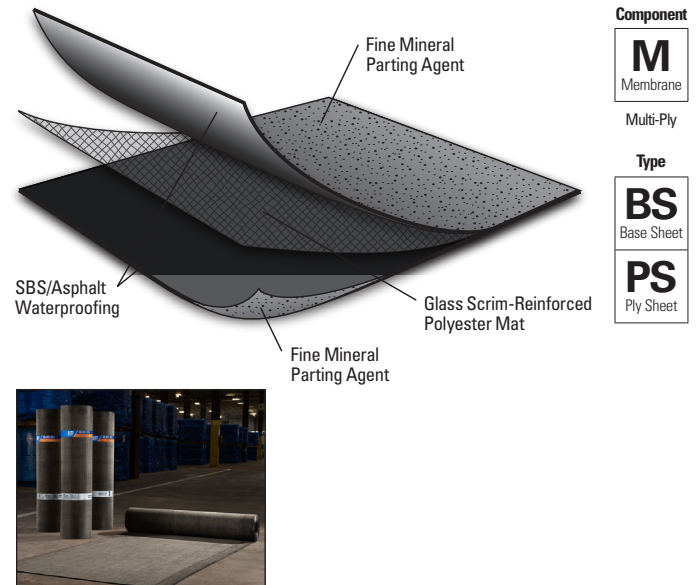

System Compatibility This product may be used as a component in the following systems. Please reference product application for specific installation methods and information.

Multi-Ply	BUR			APP			SBS				
	HA	CA	HW	HA	CA	HW	SA	MF	AD	IV	MF
Compatible with the selected Multi-Ply systems above											

Single Ply	TPO				PVC				EPDM			
	MF	AD	SA	IV	MF	AD	IV	MF	AD	BA	MF	AD
Compatible with the selected Single Ply systems above												

Key: HA = Hot Applied CA = Cold Applied HW = Heat Weldable SA = Self Adhered MF = Mechanically Fastened AD = Adhered BA = Ballasted

Energy and the Environment

Pre-Consumer Recycled Content	0%
Post-Consumer Recycled Content	0%

Peak Advantage® Guarantee Information

Systems	Guarantee Term
When used in most 2-5 ply JM SBS systems.*	Up to 30 years

*Contact JM Technical Services for specific system requirements or guarantee terms.

Codes and Approvals



Product Application



Hot Asphalt



Cold Applied



Mechanically Fastened

- May be used as a backer-ply in two-ply flashing systems
- May be installed in Type IV asphalt, or in an approved JM adhesive or may be mechanically fastened
- Laps may also be installed using heat-welding techniques
- Refer to JM SBS modified bitumen specifications and detail drawings for application and slope information
- No in-lap fastening

Packaging and Dimensions

Roll Coverage*	148.2 ft ² (13.8 m ²)
Roll Length	49' 2" (14.99 m)
Roll Width	39 3/8" (1 m)
Roll Weight	85 lb (38.6 kg)
Rolls per Pallet	20
Pallet Weight	2,050 lb (930 kg)
Pallets per Truck*	22
Producing Locations	South Gate, CA Macon, GA Plattsburgh, NY

*Assumes a 4" side lap **Assumes 48' flatbed truck.

Meets the requirements of ASTM D 6164, Type 1, Grade S

Tested Physical Properties

Physical Properties		ASTM Test Method	Standard for ASTM D 6164, Type 1, Grade S (Min.)	DynaBase PR	
				MD*	XMD**
Strength	Tensile Tear	D 5147	55 lbf. (245 N)	125 lbf (556 N)	90 lbf (400 N)
	Peak Load at 0°F (-18°C)	D 5147	70 lbf/in (12 kN/m)	110 lbf/in (19.3 kN/m)	90 lbf/in (15.8 kN/m)
	Peak Load at 73.4°F (23°C)	D 5147	50 lbf/in (8.8 kN/m)	80 lbf/in (14k N/m)	60 lbf/in (10.5 kN/m)
Longevity	Low Temp. Flexibility	Unconditioned	0°F (-18°C)	-20°F (-29°C)	
		90-Day Heat Conditioned	0°F (-18°C)	-20°F (-29°C)	
	Compound Stability	D 5147	215°F (102°C)	250°F (121°C)	
	Thickness	D 5147	85 mil. (2.2 mm)	91 mil (2.3 mm)	
	Elongation at Peak Load at 0°F (-18°C)	D 5147	20%	35%	40%
	Elongation at Peak Load at 73.4°F (23°C)	D 5147	35%	55%	60%
	Ultimate Elongation at 73.4°F (23°C)	D 5147	38%	70%	80%
Aged Performance	90-Day Heat-Conditioned Peak Load at 0°F (-18°C)		D 5147	70 lbf/in (12 kN/m)	110 lbf/in (19.3 kN/m) / 90 lbf/in (15.8 kN/m)
	90-Day Heat-Conditioned Elongation at Peak Load at 0°F (-18°C)		D 5147	20%	25% / 25%
	90-Day Heat-Conditioned Peak Load at 73.4°F (23°C)		D 5147	50 lbf/in (8.8 kN/m)	85 lbf/in (14.9 kN/m) / 65 lbf/in (11.4 kN/m)
	90-Day Heat-Conditioned Elongation at Peak Load at 73.4°F (23°C)		D 5147	35%	35% / 45%
	90-Day Heat-Conditioned Ultimate Elongation at 73.4°F (23°C)		D 5147	38%	45% / 45%
Installation	Dimensional Stability		D 5147	1.0%	0.2% / 0.1%
	Net Mass per Unit Area		D 146	54 lb/100 ft² (24.5 kg/9.29 m²)	55 lb/100 ft² (24.9 kg/9.29 m²)
	Roll Weight		D 146	N/A	85 lb (38.6 kg)

*MD = Machine Direction

**XMD = Cross-Machine Direction

Note: All data represents tested values.

Supplemental Testing

Physical Properties		ASTM Test Method	DynaBase PR Result
Cyclic Joint Displacement	Initial	D 5849	Pass at 500 cycles*
	After 90-Day Heat Conditioning per ASTM D 5147	D 5849	Pass at 200 cycles*

*In a min 2-ply system when adhered with any combination of cold applied, hot applied and or heat-weld that is approved by JM for application.

Technical specifications as shown in this literature are intended to be used as general guidelines only. Please refer to the Safety Data Sheet and product label prior to using this product. The Safety Data Sheet is available by calling (800) 922-5922 or on the web at www.jm.com/ roofing. The physical and chemical properties of the product listed herein represent typical, average values obtained in accordance with accepted test methods and are subject to normal manufacturing variations. They are supplied as a technical service and are subject to change without notice. Check with the regional sales representative nearest you for current information.

All Johns Manville products are sold subject to Johns Manville's standard Terms and Conditions, which includes a Limited Warranty and Limitation of Remedy. For a copy of the Johns Manville standard Terms and Conditions or for information on other Johns Manville roofing products and systems, visit www.jm.com/terms-conditions.