



A CORNER REINFORCEMENT STEP A

B WALL TRANSITION STEP B

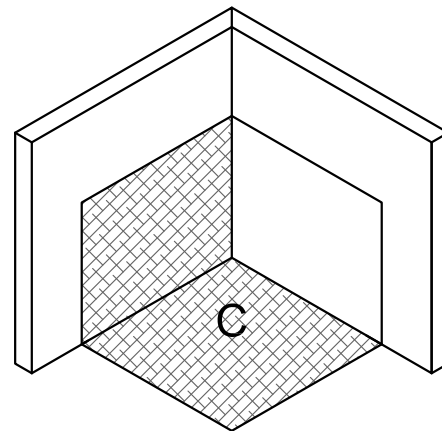

NOTES:

- A. USE SCRIM LAYOUT IN CONJUNCTION WITH THE PERMAFLASH INSIDE CORNER DETAIL DRAWING, PMF-3.
- B. ALL FOLD LINES REPRESENTED AS ALL CUT LINES REPRESENTED AS - - - - -
- C. AN EXTRA COAT OF MBR FLASHING CEMENT OR **1-PART PERMAFLASH®** MUST BE PLACED BETWEEN SCRIM LAYERS WHERE THEY OVERLAP TO ENSURE A PROPER BOND.
- D. JM RECOMMENDS DIMENSION "x" TO BE AT LEAST 6", BUT VARIATION IS ALLOWED FOR LOWER THRESHOLDS.
- E. JM ONE-PART PERMAFLASH 20 YEAR MAXIMUM GUARANTEE TERM AND TWO-PART JM PERMAFLASH 30 YEAR MAXIMUM GUARANTEE TERM.

* ADD 3 1/2" IF DETAIL UTILIZES CANT STRIP

C WALL REINFORCEMENT STEP C

DRAWING NO.

PMF-3S

CURB & CORNER

JM PERMAFLASH INSIDE CORNER SCRIM LAYOUT

MEMBRANE TYPE:
JM PERMAFLASH

Johns Manville is a manufacturer of commercial roofing products and offers this general conceptual information to you as a courtesy for general educational purposes only. This complimentary assistance is not to be either used or relied upon by anyone as a substitute for professional engineering design and documentation required by any building code, contract, or applicable law. By accepting the general conceptual information, you agree it does not constitute any representations, endorsements of, or an assumption by Johns Manville of any duty or liability for either the adequacy of the design of a building, any of its components or the sufficiency of any construction.

SCALE
N.T.S

ISSUE DATE
04-10-24

MAXIMUM GUARANTEE TERM:
20 YEAR / 30 YEAR

