
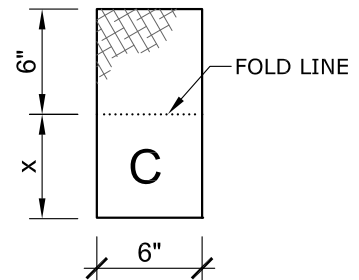


## A CORNER REINFORCEMENT STEP A

## B WALL TRANSITION STEP B

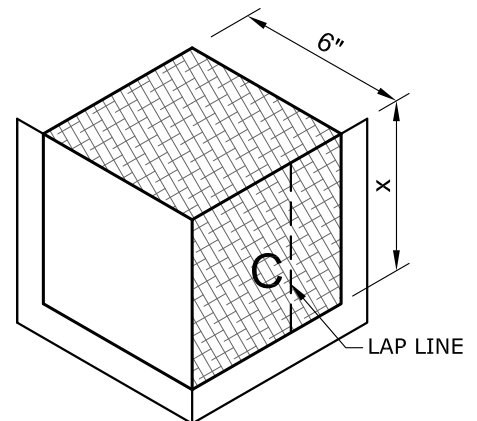

### NOTES:

- A. USE SCRIM LAYOUT IN CONJUNCTION WITH THE PERMAFLASH CURB CORNER DETAIL DRAWING, PMF-4.
- B. ALL FOLD LINES REPRESENTED AS ..... ALL CUT LINES REPRESENTED AS -----
- C. AN EXTRA COAT OF MBR FLASHING CEMENT OR **1-PART PERMAFLASH®** MUST BE PLACED BETWEEN SCRIM LAYERS WHERE THEY OVERLAP TO ENSURE A PROPER BOND.
- D. JM RECOMMENDS DIMENSION "x" TO BE AT LEAST 6", BUT VARIATION IS ALLOWED FOR LOWER THRESHOLDS.
- E. JM ONE-PART PERMAFLASH 20 YEAR MAXIMUM GUARANTEE TERM AND TWO-PART JM PERMAFLASH 30 YEAR MAXIMUM GUARANTEE TERM.

## C WALL REINFORCEMENT STEP C

DRAWING NO.

**PMF-4Sa**

CURB & CORNER

JM PERMAFLASH OUTSIDE CORNER SCRIM LAYOUT (TOP)

MEMBRANE TYPE:  
JM PERMAFLASH

SCALE  
N.T.S

ISSUE DATE  
04-10-24

MAXIMUM GUARANTEE TERM:  
20 YEAR / 30 YEAR

Johns Manville is a manufacturer of commercial roofing products and offers this general conceptual information to you as a courtesy. This complimentary assistance is not to be used or relied upon by anyone as a substitute for professional engineering design and documentation required by building code, contract, or applicable law. By accepting these comments you agree they do not constitute any representations, endorsements of, or an assumption by Johns Manville of any liability for either the adequacy of the design of this building or any other material not supplied by Johns Manville.

