

COMPANY

Johns Manville, a Berkshire Hathaway company, was founded in 1858. Our ownership by Berkshire Hathaway, one of the most admired companies in the world and one of the most financially secure, allows JM to invest for the future. This enables JM to continue delivering the broadest range of insulation products in the industry and offering innovative solutions that meet your needs.

DESCRIPTION

JM mineral wool batts are made of inorganic fibres derived from basalt, a volcanic rock, and are enhanced with glass fibres. Advanced manufacturing technology ensures consistent product quality, with high-fibre density and low shot content for excellent performance. JM mineral wool batts are inorganic, noncombustible, moisture resistant, non-deteriorating, and will not mildew or support corrosion.

USE

JM TempControl® batts are designed to deliver thermal control in wood-stud cavities of exterior walls, basements, and heated crawl spaces.


INSTALLATION

In standard wood framing, carefully insert batts between the wood studs or joists to fill the cavities with a friction-fit to framing members. JM mineral wool batts are easily cut with a knife for quick installation and snug fit in nonstandard size cavities.

PACKAGING

JM TempControl® products are compression packed for more efficient storage and transport.

DESIGN CONSIDERATIONS

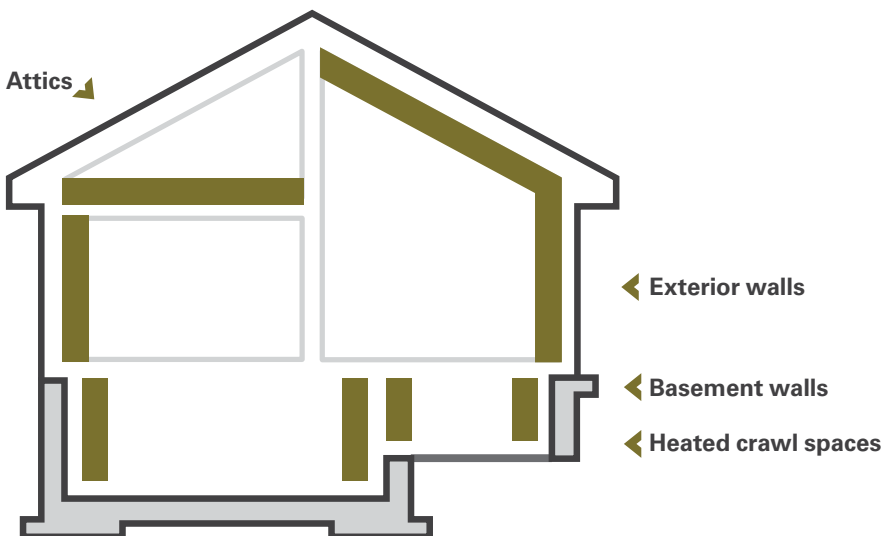

PERFORMANCE ADVANTAGES

Dependable Thermal Performance:

With high fibre quality and low shot content, JM mineral wool batts deliver consistent thermal insulating performance at the rated R-value. The high-density, non-combustible fibre helps keep homes warm in winter and cool in summer while reducing heating and cooling bills to save money year-round.

Fire Safety: Noncombustible JM mineral wool batt insulation contributes to high fire-resistance capabilities in insulated assemblies.

Noncombustible: See Applicable Standards for details.

Durable & Inorganic: JM mineral wool batts do not support growth of fungi, nor do they sustain vermin.

LIMITATIONS OF USE

Check applicable building codes.

APPLICABLE STANDARDS & BUILDING CODE CLASSIFICATION

JM MINERAL WOOL BATTS
CAN/ULC-S702-09, Type 1
ULC/CAN-S114 Noncombustible
CAN/ULC-S102 Flame Spread/Smoke Developed, 0/0
National Building Code of Canada (NBC) 9.25.22
CCMC Listing Number 13682-L (RSI-2.5,3.9,4.9)

PHYSICAL PROPERTIES

PROPERTY	TEST METHOD	RATING
Thermal Resistance	ASTM C518	R-14, R-22, R-28
Surface Burning Characteristics	CAN/ULC-S102	Flame spread 0/smoke 0
Surface Burning Characteristics	ASTM E84 (UL 723)	Flame spread 0/smoke 0
Smoulder Resistance	CAN/ULC-S129	Pass
Noncombustible	ASTM E136	Pass
Water Vapor Sorption	ASTM C1104	Less than 5%
Odor Emission	ASTM C1304	Pass
Corrosiveness	ASTM C665	Pass
Fungi Resistance	ASTM C1338	Pass

STANDARD SIZES

PRODUCT	THICKNESS in (mm)	WIDTH in (mm)	LENGTH in (mm)
R-14 TempControl® (RSI-2.5)	3½" (89)	15¼" (387), 23" (584)	47" (1194)
R-22 TempControl® (RSI-3.9)	5½" (140)	15¼" (387), 23" (584)	47" (1194)
R-28 TempControl® (RSI-4.9)	7¼" (184)	15¼" (387), 23" (584)	47" (1194)