

JM Climate Pro® A2400 Fiber Glass Blowing Wool

Your home has been professionally insulated to provide superior thermal resistance.

Homeowner's Name _____ Date _____

Address _____

City _____ State _____ ZIP _____

RECORD OF INSTALLATION

BLOWING WOOL		BATTS AND ROLLS		
<input type="checkbox"/> New Construction	If Retrofit:	R-VALUE	THICKNESS	AREA INSULATED
<input type="checkbox"/> Retrofit	Depth of Previous Insulation _____ in.	Ceilings	_____ in.	_____ sq. ft.
Number of bags used _____	Estimated R-value of Previous Installation _____		_____ in.	_____ sq. ft.
Area Insulated _____ sq. ft.	Types of Previous Insulation in Attic _____	Walls	_____ in.	_____ sq. ft.
Thickness of Insulation _____ in.			_____ in.	_____ sq. ft.
R-value of Insulation _____		Floors	_____ in.	_____ sq. ft.
			_____ in.	_____ sq. ft.

CLIMATE PRO A2400 INSULATION

R-VALUE (HR•SQ.FT.°F/BTU)	MINIMUM INSTALLED THICKNESS (IN.)*	SETTLED THICKNESS (IN.)	MINIMUM WEIGHT PER UNIT AREA (POUNDS/SQ.FT.)	BAGS PER 1,000 SQ.FT.	MAXIMUM NET COVERAGE (SQ.FT./BAG)**
To obtain insulation resistance (R) of:	Installed insulation shall not be less than:	Expected thickness after long-term settling has occurred:	Weight per sq.ft. of installed insulation shall not be less than:	Minimum number of bags per 1,000 sq.ft. of net area shall not be less than:	Contents of this bag shall not cover more than:
13	5.25	5.25	0.182	6.1	164.9
19	7.50	7.50	0.267	8.9	112.5
22	8.50	8.50	0.306	10.2	98.2
26	10.00	10.00	0.366	12.2	82.1
30	11.50	11.50	0.427	14.2	70.2
38	14.50	14.50	0.556	18.5	53.9
44	16.50	16.50	0.646	21.5	46.4
49	18.25	18.25	0.727	24.2	41.2
60	21.75	21.75	0.897	29.9	33.4

See reverse to determine adjustment in coverage for Climate Pro A2400 insulation in Minnesota.

*Determined using a Unisul Volu-Matic III blowing machine. The machine was set up in 3rd gear, with a 75% open gate and a 3" hose, blowing the wool out in a 10 ft. arc.

**Coverage without framing.

Insulation Contractor Signature _____ Date _____

Company _____ Address _____ Phone _____


Home Builder Signature _____ Date _____

Company _____ Address _____ Phone _____





JM CLIMATE PRO® A2400 FIBER GLASS BLOWING WOOL FOR MINNESOTA ONLY

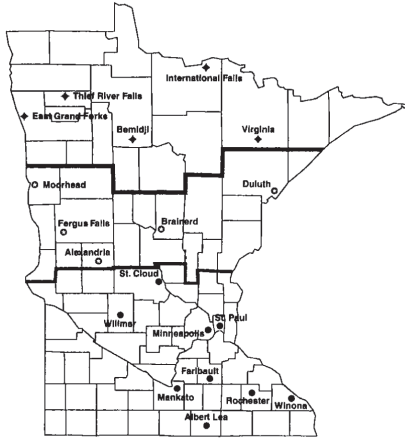

WINTER DESIGN TEMPERATURES

CITY	TEMPERATURE (F)	CITY	TEMPERATURE (F)
Winona	-14°	Brainerd	-20°
Willmar	-15°	Duluth	-21°
St. Cloud	-15°	Fergus Falls	-21°
Minneapolis	-16°	Alexandria	-22°
Mankato	-17°	Virginia	-25°
Rochester	-17°	International Falls	-29°
Albert Lea	-17°	Bemidji	-31°
Faribault	-17°		

To allow consumers to make fair comparisons and informed decisions, the Federal Trade Commission requires that all home insulation products be tested and labeled in a uniform manner. FTC Trade Regulation Rule Part 460 specifies that all products be rated at 75°F mean temperature.

Although the in-place performance of insulation materials may vary due to installation quality, temperature difference, framing or other factors, fibrous insulation performance generally improves as attics get colder. However, at extreme cold temperatures, the performance (R-value) of fiber glass insulation products may start to decline below the labeled value. This is due to the phenomenon of convection in the attic causing slight air movement through porous cavities within insulation materials. The extreme temperatures at which this effect occurs varies with product type and manufacturer. For instance, fiber glass batt insulation does not exhibit a loss of R-value at temperatures normally seen anywhere in the United States.

Blown loose-fill insulation products are more susceptible to convection than batts because the random orientation of the fibers provides less resistance to air flow. Despite this, only a few areas within the United States reach sustained temperatures cold enough to cause concern. All loose-fill products perform differently. Johns Manville has extensively tested our attic insulation products at extreme cold temperatures.

Minnesota law requires an insulation product to be designed to provide its stated R-value at winter design temperatures. The chart below shows the additional amount of Climate Pro A2400 insulation needed to attain a desired R-value at various winter design temperatures.

ADDITIONAL CLIMATE PRO A2400 NEEDED TO ATTAIN R-VALUE IN EXTREMELY COLD TEMPERATURES

WINTER DESIGN TEMPERATURE	R-38		R-44	
	EXTRA DEPTH INCHES	EXTRA BAGS PER 1,000 SQ. FT.	EXTRA DEPTH INCHES	EXTRA BAGS PER 1,000 SQ. FT.
-14 to -17°F	1	1.3	¼	0.3
-18 to -22°F	1½	1.9	¾	1
-23°F and colder	2½	3.2	2	2.6
WINTER DESIGN TEMPERATURE	R-50		R-60	
	EXTRA DEPTH INCHES	EXTRA BAGS PER 1,000 SQ. FT.	EXTRA DEPTH INCHES	EXTRA BAGS PER 1,000 SQ. FT.
-14 to -17°F	0	0	0	0
-18 to -22°F	0	0	0	0
-23°F and colder	1	1.4	0	0

WHAT YOU SHOULD KNOW ABOUT R-VALUES

The chart shows the R-values of this insulation. R means resistance to heat flow. The higher the R-value, the greater the insulating power. Compare insulation R-values before you buy.

To get the marked R-value, it is essential that this insulation be installed properly with pneumatic equipment.

