

Meets the requirements of ASTM D 6164, Type II, Grade G

Features and Components


DynaWeld Cap 250 is used as a premium polyester-reinforced cap or flashing sheet in a variety of multi-ply roofing systems.

Ceramic-Coated Roofing Granules: Specifically engineered for optimal embedment in the SBS-blend sheet. The ceramic coating promotes excellent long-term adhesion. Granules are available in White, Black and Tan (Black and Tan may require extended lead times).

Fiber Glass/Polyester Reinforcement Mat: Lends elasticity and flexibility to the sheet. The elongation and recovery properties allow the product to easily accommodate the continual expansion and contraction experienced on all roofs. The FR blend contains additional fire-retardant additives.

Heavy Duty Polyester-Reinforcement Mat: Provides excellent tensile strength, toughness, and puncture resistance and can accommodate stresses created by typical roof top expansion and contraction forces.

Polyolefin Burn-Off Film: Promotes ease of heat welding.

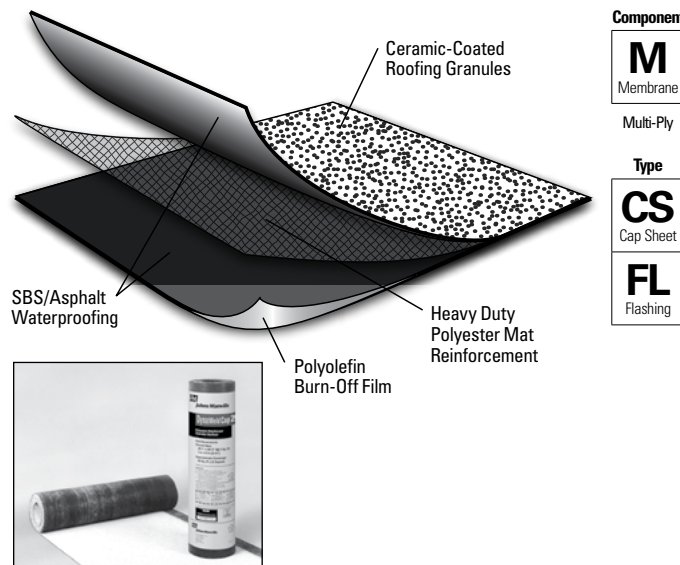

Colors: White, Black and Tan
(Black and Tan may require extended lead times).

System Compatibility This product may be used as a component in the following systems. Please reference product application for specific installation methods and information.

Multi-Ply	BUR		APP		SBS			
	HA	CA	CA	HW	HA	CA	HW	SA
Compatible with the selected Multi-Ply systems above								

Single Ply	TPO		PVC		EPDM		
	MF	FA	MF	FA	MF	FA	BA
Do not use with Single Ply systems							

Key: HA = Hot Applied CA = Cold Applied HW = Heat Weldable SA = Self Adhered MF = Mechanically Fastened FA = Fully Adhered BA = Ballasted

Energy and the Environment

Test	Initial	3-Year Aged
Reflectivity* (ASTM C 1549)	0.26	0.27
Emissivity* (ASTM C 1371)	0.87	0.84
Solar Reflectance Index* (SRI) - E 1980	25	25
Pre-Consumer Recycled Content	0%	
Post-Consumer Recycled Content	0%	

*Standard White Granule only

Peak Advantage® Guarantee Information

Systems	Guarantee Term
When used in most 2-5 ply JM SBS systems.*	Up to 30 years

*Contact JM Technical Services for specific system requirements or guarantee terms.

Codes and Approvals



Product Application



Heat Weld

- Must be installed using heat-welding techniques
- Refer to JM SBS modified bitumen specifications and detail drawings for application and slope information

Packaging and Dimensions

Roll Coverage*	95.8 ft ² (8.9 m ²)
Roll Length	32' 10" (10 m)
Roll Width	39 3/8" (1 m)
Roll Weight	115 lb (52.2 kg)
Rolls per Pallet	20
Pallet Weight	2,430 lb (1,102 kg)
Pallets per Truck**	20

*Assumes a 4' side lap **Assumes 48' flatbed truck.

Meets the requirements of ASTM D 6164, Type II, Grade G

Tested Physical Properties¹

Physical Properties		ASTM Test Method	Standard for ASTM D 6164, Type II, Grade G (Min.)	DynaWeld Cap 180	
				MD*	XMD**
Strength	Tensile Tear	D 5147	70 lbf (311 N)	181 lbf (805 N)	124 lbf (552 N)
	Peak Load at -18°C (0°F)	D 5147	100 lbf/in (17.5 kN/m)	184 lbf/in (32.2 kN/m)	122 lbf/in (21.4 kN/m)
	Peak Load at 23°C (73.4°F)	D 5147	70 lbf/in (12 kN/m)	106 lbf/in (18.6 kN/m)	84 lbf/in (14.7 kN/m)
Longevity	Low Temp. Flexibility	Unconditioned	D 5147	0°F (-18°C)	-10°F (-23°C)
		90-Day Heat Conditioned	D 5147	0°F (-18°C)	-10°F (-23°C)
	Compound Stability	D 5147	215°F (102°C)	250°F (121°C)	
	Granule Loss	D 4977	2 g (0.07 oz)	0.7 g (0.02 oz)	
	Thickness	D 5147	130 mil. (3.3 mm)	165 mil. (4.2 mm)	
	Selvage Edge Thickness	D 5147	N/A	134 mil. (3.4 mm)	
	Elongation at Peak Load at -18°C (0°F)	D 5147	20%	46%	54%
	Elongation at Peak Load at 23°C (73.4°F)	D 5147	50%	58%	71%
	Ultimate Elongation at 23°C (73.4°F)	D 5147	60%	61%	76%
Aged Performance	90-Day Heat-Conditioned Peak Load at -18°C (0°F)	D 5147	100 lbf/in (17.5 kN/m)	178 lbf/in (31.2 kN/m)	119 lbf/in (20.8 kN/m)
	90-Day Heat-Conditioned Elongation at Peak Load at -18°C (0°F)	D 5147	20%	49%	60%
	90-Day Heat-Conditioned Peak Load at 23°C (73.4°F)	D 5147	70 lbf/in (12 kN/m)	133 lbf/in (23.3 kN/m)	96 lbf/in (16.8 kN/m)
	90-Day Heat-Conditioned Elongation at Peak Load at 23°C (73.4°F)	D 5147	50%	58%	68%
	90-Day Heat-Conditioned Ultimate Elongation at 23°C (73.4°F)	D 5147	60%	60%	71%
Installation	Dimensional Stability	D 5147	1.0%	0.3%	0.1%
	Net Mass per Unit Area	D 146	90 lb/100 ft ² (41 kg/9.29 m ²)	110 lb/100 ft ² (49.9 kg/9.29 m ²)	
	Roll Weight	D 146	N/A	115 lb (52.2 kg)	

*MD = Machine Direction

**XMD = Cross-Machine Direction

1. Material tested in accordance with CAN/CGSB 37-GP-56M.