


Features and Components

- Use:** To efficiently flash curbs with a consistent, clean appearance.
- Materials:** 60 mil (1.52 mm) thick, EPDM with a release liner and a 3" or 6" factory laminated, self-adhering EPDM tape.
- Color:** Black

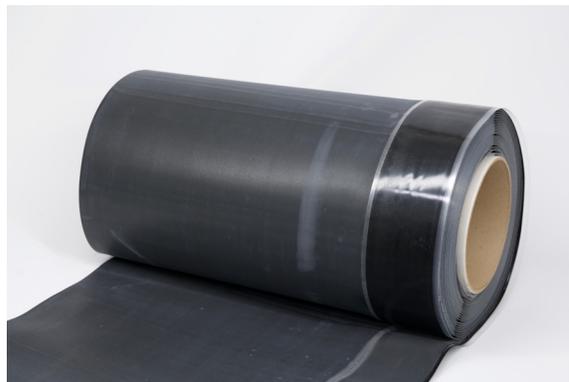

Component
A Accessory
Single Ply
Type
FC Curb/Corner

System Compatibility This product may be used as a component in the following systems. Please reference product application for specific installation methods and information.

Multi-Ply	BUR		APP			SBS			
	HA	CA	HW	HA	CA	HW	SA	MF	
<i>Do not use in multi-ply systems</i>									

Single Ply	TPO				PVC			EPDM		
	MF	AD	SA	IW	MF	AD	IW	MF	AD	BA
<i>Compatible with the selected single ply systems above</i>										

Key: HA = Hot Applied CA = Cold Applied HW = Heat Weldable SA = Self Adhered MF = Mechanically Fastened IW = Induction Weld BA = Ballasted AD = Adhered

Peak Advantage® Guarantee Information

Systems
Approved for use in any JM Peak Advantage Guarantee System. 6" seam tape flashing is required for all 20+ year guarantees.

Installation/Application



Fully Adhered

- Prime EPDM membrane with JM Tape Primer or JM Tape Primer (Low VOC) before applying to JM EPDM Pre-Taped Curb Flashing.
- Do not install in direct contact with asphalt or coal tar pitch.
- Refer to JM EPDM applicator guides or detail drawings for instructions.

Packaging and Dimensions

Roll Sizes	18" x 50' (45.72 cm x 15.2 m) with 3" (7.62 cm) tape	24" x 50' (60.96 cm x 15.2 m) with 6" (15.24 cm) tape
Thickness: Membrane	0.060" (1.52 mm)	
Tape	0.025" (0.64 mm)	
Total	0.085" (2.16 mm)	
Rolls per Box	1	1
Linear ft (m) per Box	50 (15.24)	50 (15.24)
Weight per Box, lb (kg)	34 (15.42)	47 (21.31)
Weight per Pallet, lb (kg)	40" x 40" x 51" 866 lbs (392.8 kg)	40" x 40" x 60" 1127 lbs (511.2 kg)

Technical specifications as shown in this literature are intended to be used as general guidelines only. Please refer to the Safety Data Sheet and product label prior to using this product. The Safety Data Sheet is available by calling (800) 922-5922 or on the web at www.jm.com/roofing. The physical and chemical properties of the product listed herein represent typical, average values obtained in accordance with accepted test methods and are subject to normal manufacturing variations. They are supplied as a technical service and are subject to change without notice. Check with the regional sales representative nearest you for current information. All Johns Manville products are sold subject to Johns Manville's standard Terms and Conditions, which includes a Limited Warranty and Limitation of Remedy. For a copy of the Johns Manville standard Terms and Conditions or for information on other Johns Manville roofing products and systems, visit www.jm.com/terms-conditions.

Storage

Shelf Life	18 months from manufacture date
Storage Conditions	Store indoors, out of direct sunlight, keep clean and dry prior to use.
Temperature Range	40°F – 110°F (4.4°C – 43.3°C)