


### Features and Components

JM EPDM Metal/Membrane Flashing is a specially designed and manufactured flashing for sealing and waterproofing JM EPDM roofing systems where they join an adjacent bituminous roof membrane.

**Materials:** A nominal 6" (15.24 cm) strip of black JM EPDM membrane secured to flanges of nominal 4" (10.16 cm) wide galvanized steel.

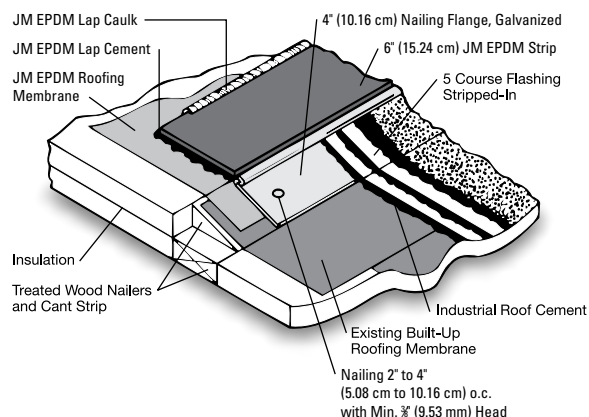

### Component

**S**  
Specialty

Multi-Ply  
Single Ply

Type

**TI**  
Tie-In Flashing

**System Compatibility** This product may be used as a component in the following systems. Please reference product application for specific installation methods and information.

Multi-Ply	BUR		APP		SBS			
	HA	CA	CA	HW	HA	CA	HW	SA
<i>Compatible with all Multi-Ply systems</i>								

Single Ply	TPO		PVC		EPDM		
	MF	FA	MF	FA	MF	FA	BA
<i>Compatible with the selected Single Ply systems above</i>							

**Key:** HA = Hot Applied CA = Cold Applied HW = Heat Weldable SA = Self Adhered MF = Mechanically Fastened FA = Fully Adhered BA = Ballasted

### Energy and the Environment

Pre-Consumer Recycled Content	0%
Post-Consumer Recycled Content	0%

### Peak Advantage® Guarantee Information

Covered under the JM Peak Advantage Guarantee when installed in a JM approved roofing system.

### Installation/Application

- Do not install EPDM membrane in direct contact with asphalt or coal tar pitch.
- Refer to JM applicator guides or detail drawings for instructions.

### Packaging and Dimensions

EPDM Membrane width	6" (15.24 cm)
Galvanized Steel width	4" (10.16 cm)
Linear ft (m) per Carton	100 lin ft (30.48 lin m)
Weight per Carton lb (kg) (approx)	65 lb (29.5 kg)
Producing Location	Lewiston, ME

### Storage

Shelf Life	12 months from manufacture date
Storage Conditions	Store indoors, out of direct sunlight
Temperature Range	60°F to 80°F (16°C to 27°C)