


Features and Components

Use: To easily form flashings around corners and penetrations. Specifically designed for use in areas that cannot be properly detailed with PVC field membrane.

Material: 75 mil (1.91 mm) thick, reversible, flexible, non-reinforced, UV-resistant PVC (polyvinyl chloride) with Elvaloy®* KEE (ketone ethylene ester).

Colors: White/Grey Grey ES/White
 Sandstone/White Sandstone ES/White
 White/Charcoal

* Elvaloy is a registered trademark of Dow.

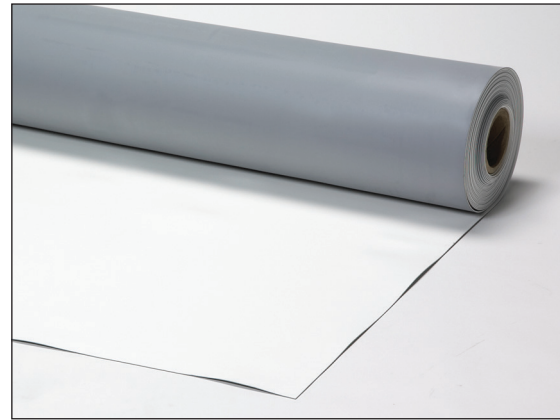

Component

A
Accessory

Single Ply

Type

FW
Flashing Wall

FC
Curb/Corner

System Compatibility This product may be used as a component in the following systems. Please reference product application for specific installation methods and information.

| | | | | | | | | | |
|--|-----|----|-----|----|-----|----|----|----|----|
| Multi-Ply | BUR | | APP | | SBS | | | | |
| | HA | CA | CA | HW | HA | CA | HW | SA | MF |
| <i>Do not use in Multi-Ply systems</i> | | | | | | | | | |

| | | | | | | | |
|--|-----|----|-----|----|------|----|----|
| Single Ply | TPO | | PVC | | EPDM | | |
| | MF | FA | MF | FA | MF | FA | BA |
| <i>Compatible with the selected Single Ply systems above</i> | | | | | | | |

Key: HA = Hot Applied CA = Cold Applied HW = Heat Weldable SA = Self Adhered MF = Mechanically Fastened FA = Fully Adhered BA = Ballasted

Peak Advantage® Guarantee Information

| |
|--|
| Systems |
| Approved for use in any JM Peak Advantage Guarantee System |

Installation/Application



Hot Air Weld

- Do not install JM PVC Detail Membrane in direct contact with asphalt or coal tar pitch
- Refer to JM PVC applicator guides or detail drawings for instructions

Packaging and Dimensions

| | |
|-------------------|---|
| Roll Size | 36" x 50' (91.44 cm x 15.24 m) |
| Nominal Thickness | 0.075" (1.91 mm) |
| Coverage per Roll | 150 ft ² (13.94 m ²) (gross) |
| Weight per Roll | 75 lb (34.0 kg) |

Storage

| | |
|--------------------|--|
| Storage Conditions | Store indoors, out of direct sunlight, in a cool, dry location prior to application. |
|--------------------|--|