


## Features and Components

**Use:** Primarily used as a safety warning line for roof perimeters.

**Material:** 45 mil thick, reinforced, UV-resistant PVC (polyvinyl chloride) with Elvaloy®\* KEE (ketone ethylene ester).

**Colors:** Yellow

\*Elvaloy® KEE is a registered trademark of Dow.

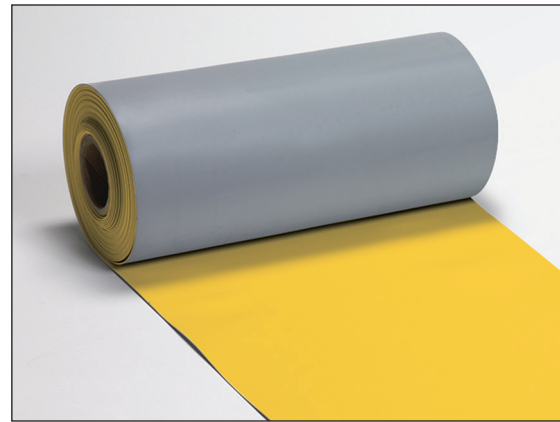

**Component**

**A**  
Accessory

Single Ply

**Type**

**PT**  
Protection

**System Compatibility** *This product may be used as a component in the following systems. Please reference product application for specific installation methods and information.*

Multi-Ply	BUR		APP		SBS				
	HA	CA	CA	HW	HA	CA	HW	SA	MF
<i>Do not use in Multi-Ply systems</i>									

Single Ply	TPO		PVC		EPDM		
	MF	FA	MF	FA	MF	FA	BA
<i>Compatible with the selected Single Ply systems above</i>							

**Key:** HA = Hot Applied CA = Cold Applied HW = Heat Weldable SA = Self Adhered MF = Mechanically Fastened FA = Fully Adhered BA = Ballasted

## Peak Advantage® Guarantee Information

Systems
Approved for use in any JM Peak Advantage Guarantee System

## Installation/Application



Hot Air Weld

- Do not install JM PVC Detail Strip in direct contact with asphalt or coal tar pitch
- Refer to JM PVC applicator guides or detail drawings for instructions

## Packaging and Dimensions

Roll Size ( <i>width x length</i> )	12' x 150' (30.5 cm x 45.72 m)
Nominal Thickness	0.045" (1.83 mm)
Coverage per Roll ( <i>gross</i> )	150 ft <sup>2</sup> (13.93 m <sup>2</sup> )
Weight per Roll	60 lb (39.0 kg)

## Storage

Storage Conditions	Store indoors, out of direct sunlight, and keep clean and dry prior to application.
--------------------	---