

### Features and Components


Presto Stop is a factory-fabricated metal edge system used to terminate the roof at the perimeter of a structure. Presto Stop can be used with built-up, modified bitumen and single ply roofing systems. Presto Stop is an economical solution for many conditions such as continuous edge drainage with or without a gutter condition.

**Gravel Stop and Drip Edge:** 10' (3.05 m) lengths formed from: 24 (0.61 mm) or 22 (0.76 mm) gauge galvanized steel, or 0.040" (1.02 mm), 0.050" (1.27 mm) or 0.063" (1.6 mm) aluminum. Other metals are available upon request, including PVC-coated metal and TPO-coated metal.

**Anchor Cleat:** Galvanized continuous anchor cleat or soffit cleat is provided with all gravel stops.

**Finishes:** Steel and aluminum available in a number of standard Kynar®\* 500 colors, aluminum also available in mill and anodized finishes. Custom colors available upon request.

\*Kynar® is a registered trademark of Arkema, Inc.

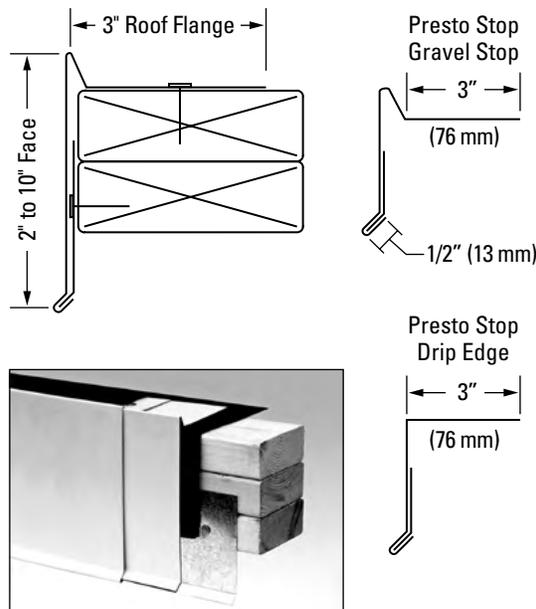

<b>Component</b>
<b>S</b> Specialty
Multi-Ply Single Ply
<b>Type</b>
<b>EM</b> Edge Metal

### System Compatibility *This product may be used as a component in the following systems. Please reference product application for specific installation methods and information.*

Multi-Ply	BUR		APP		SBS			
	HA	CA	CA	HW	HA	CA	HW	SA
<b>Compatible with all Multi-Ply systems</b>								

Single Ply	TPO		PVC		EPDM		
	MF	FA	MF	FA	MF	FA	BA
<b>Compatible with all Single Ply systems</b>							

**Key:** HA = Hot Applied CA = Cold Applied HW = Heat Weldable SA = Self Adhered MF = Mechanically Fastened FA = Fully Adhered BA = Ballasted

### Energy and the Environment

Pre-Consumer Recycled Content	Varies by cover material
Post-Consumer Recycled Content	Varies by cover material

### Peak Advantage® Guarantee Information

Covered under the JM Peak Advantage Guarantee when installed in a JM approved roofing system.

### Installation/Application

Refer to JM applicator guides or detail drawings for instructions.

### Packaging and Dimensions

Anchor Cleat	
Cover	10' (3.05 m) lengths, 2" (5.08 cm) to 10" (25.4 cm) fascia heights Available in any combination of the following gauges and finishes: Aluminum gauges: 0.040" (1.02 mm), 0.050" (1.27 mm), 0.063" (1.6 mm) Galvanized gauges: 24 ga (0.61 mm), 22 ga (0.76 mm) Aluminum finishes: Mill, Kynar 500, Clear or Colored Anodized Galvanized finishes: Mill and Kynar 500,
Producing Location	Lewiston, ME