

Features and Components

Edge One Fascia system offers convenience and economical pricing to simplify projects and maximize profits. Our Edge One Fascia for single-ply roofs helps to protect the roof system against high wind events, saving the building from costly damage. The design eliminates the stripping in typical of other products, making Edge One Fascia fast and easy to install.

Anchor Cleat: 12' (3.7 m) lengths, 20 gauge (1.00 mm) formed galvanized steel, preslotted 12" (30.48 cm) o.c. with 6" (15.24 cm) wide stainless steel spring clips at 48" (1.22m) o.c.


Fasteners: Stainless Steel #10 x 2" (5.08 cm) fasteners with hexagonal head and driver bit are furnished. Masonry fasteners available upon request.

Fascia Cover: Snap-On covers in 12' (3.7 m) lengths, available in 24 ga. (0.6 mm) steel and 0.040" (1.02 mm) aluminum, other metals available upon request. Factory "notched" to provide a 1" (2.54 cm) lap joint.

Finishes: Steel and aluminum available in a number of standard Kynar®* 500 colors, aluminum also available in mill and anodized finishes. Custom colors available upon request.

Accessories: Factory-fabricated corners, overflow and spillout scuppers, downspout sumps, radius and special angles, extenders and soffit clip systems are also available.

*Kynar® is a registered trademark of Arkema, Inc.

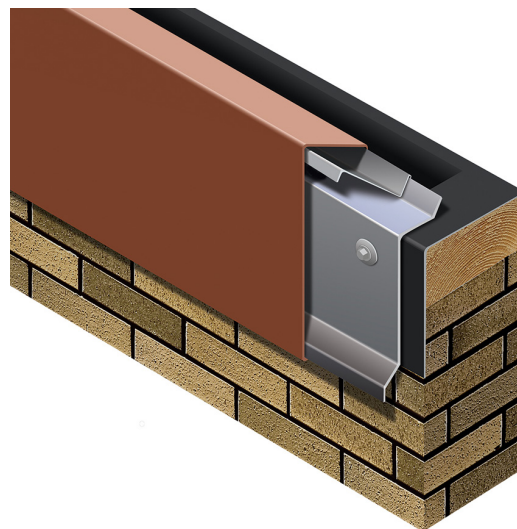

Component

S
Specialty

Single Ply

Type

EM
Edge Metal

Style	Face Height	Coverage Dimension
ME-40	4" (102 mm)	2" (50.8 mm)
ME-50	5" (130 mm)	3" (76.2 mm)
ME-65	6.5" (168 mm)	4.5" (114.3 mm)
ME-80	8" (206 mm)	6" (152.4 mm)

Extended Face heights are also available, contact Customer Service at 800-445-1500 for additional information.

System Compatibility This product may be used as a component in the following systems. Please reference product application for specific installation methods and information.

Multi-Ply	BUR		APP			SBS				
	HA	CA	HW	HA	CA	HW	SA	MF		
<i>Do not use with Multi-Ply systems</i>										

Single Ply	TPO				PVC			EPDM		
	MF	AD	SA	IW	MF	AD	IW	MF	AD	BA
<i>Compatible with the selected Single Ply systems above</i>										

Key: HA = Hot Applied CA = Cold Applied HW = Heat Weldable SA = Self Adhered MF = Mechanically Fastened IW = Induction Weld BA = Ballasted AD = Adhered

Energy and the Environment

Pre-Consumer Recycled Content	Contact Specialty Roofing Products at (800) 445-1500
Post-Consumer Recycled Content	

Peak Advantage® Guarantee Information

Covered under the JM Peak Advantage Guarantee when installed in a JM approved roofing system.

Codes and Approvals



Face Height	FM (lb/ft²)	ANSI/SPRI (lb/ft²)
4"-5"	405	396
6.5"-8"	150	155

Installation/Application

JM flashing edge details have been created for this product and are available on jm.com.

Sizes/Dimensions/Finishes

Anchor Cleat	12' (3.7 m) lengths, 20 gauge (1.00 mm) formed galvanized steel, preslotted 12" (30.48 cm) o.c. with 6" (15.24 cm) wide stainless steel spring clips at 48" (1.22m) o.c.
Fasteners	#9 x 2" (5.08 cm) with hexagonal head, with furnished driver bit
Fascia Cover	12' (3.7 m) lengths available in any combination of the following gauges and finishes: Aluminum gauge: 0.040" (1.02 mm) Steel gauge: 24 gauge (0.61 mm) Aluminum finishes: Mill, Kynar 500, Clear or Colored Anodized Steel finishes: Kynar 500
Spring Clips	6" length, stainless steel
Producing Location	Waukesha, WI

Refer to the Safe Use Instructions and product label prior to using this product. The Safe Use Instructions are available by calling (800) 922-5922 or on the Web at www.jm.com/roofing.