

### Features and Components

Designed to attach termination bar to concrete or masonry walls, Zinc Nail-In Anchors offer a zinc-plated steel pin and are available in 1/4" (6 mm) diameter and 1 1/4" (32 mm) length.

**Use:** Single Ply Membranes


**Materials:** Zinc-Coated Steel

**Color:** Grey

**Wall Types:** Concrete and Masonry

### Plate Compatibility

Designed to attach Termination Bars

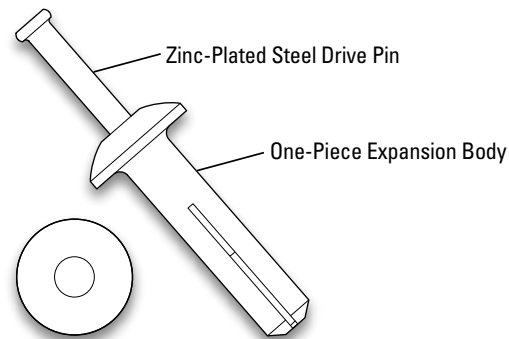

Component

**F**  
Fastening

Type

**M**  
Membrane  
Single Ply



### System Compatibility (Walls and Vertical Surfaces Only)

This product may be used as a component in the following systems. Please reference product application for specific installation methods and information.

Multi-Ply	BUR		APP		SBS				
	HA	CA	CA	HW	HA	CA	HW	CA	MF
<i>Do not use in Multi-Ply systems</i>									

Single Ply	TPO		PVC		EPDM		
	MF	FA	MF	FA	MF	FA	BA
<i>Use to fasten Termination Bars in all Single Ply Systems</i>							

**Key:** HA = Hot Applied CA = Cold Applied HW = Heat Weldable SA = Self Adhered MF = Mechanically Fastened FA = Fully Adhered BA = Ballasted

### Energy and the Environment

Recycled Content	This steel based product contains a minimum of 25% post consumer recycled materials by weight
------------------	---

### Peak Advantage® Guarantee Information

Systems	Approved to use with any Peak Advantage Guarantee
---------	---

### Installation/Application

Refer to the application instructions guidelines for proper utilization of this product.

### Packaging and Dimensions

Sizes	Quantity/Container
1 1/4" (3.18 cm) length 1/4" (6.35 mm) diameter	1,000/box
Producing Locations*	Agawam, MA and Itasca, IL

\* The point of manufacture for fasteners and plates varies depending on the specific part. Call your local JM sales professional for assistance.