


## Features and Components

- Use:** Provide a safe, stable and maintenance-free walkway for quick and easy access to rooftop equipment in high traffic areas.
- Materials:** 375 mil (9.53 mm) thick, textured, solid rubber pad with three rows of 3" (762 mm) wide factory-applied tape.
- Color:** Black

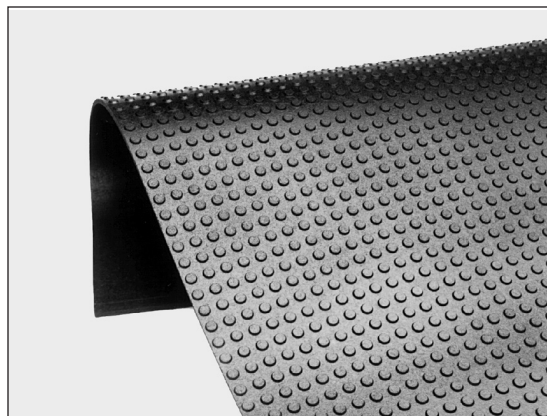

<b>Component</b>
<b>A</b> Accessory
Single Ply
<b>Type</b>
<b>PT</b> Protection

## System Compatibility This product may be used as a component in the following systems. Please reference product application for specific installation methods and information.

Multi-Ply	BUR	APP		SBS				
	HA	CA	HW	HA	CA	HW	SA	MF
<i>Do not use in multi-ply systems</i>								

Single Ply	TPO			PVC			EPDM			
	MF	AD	SA	IW	MF	AD	IW	MF	AD	BA
<i>Compatible with the selected single ply systems above</i>										

**Key:** HA = Hot Applied CA = Cold Applied HW = Heat Weldable SA = Self Adhered MF = Mechanically Fastened IW = Induction Weld BA = Ballasted AD = Adhered

## Physical Properties

Property	ASTM Test Method	JM EPDM Peel & Stick Walkpads
Specific Gravity Water Displacement Method Specific Displacement Method	D 297	1.06 gm/cm 1.15 gm/cm
Tear Resistance	D 624	250 lb/in. (43.8 kN/m)

## Peak Advantage® Guarantee Information

Systems
Approved for use in any JM Peak Advantage Guarantee System

Technical specifications as shown in this literature are intended to be used as general guidelines only. Please refer to the Safety Data Sheet and product label prior to using this product. The Safety Data Sheet is available by calling (800) 922-5922 or on the web at [www.jm.com/roofing](http://www.jm.com/roofing). The physical and chemical properties of the product listed herein represent typical, average values obtained in accordance with accepted test methods and are subject to normal manufacturing variations. They are supplied as a technical service and are subject to change without notice. Check with the regional sales representative nearest you for current information.

All Johns Manville products are sold subject to Johns Manville's standard Terms and Conditions, which includes a Limited Warranty and Limitation of Remedy. For a copy of the Johns Manville standard Terms and Conditions or for information on other Johns Manville roofing products and systems, visit [www.jm.com/terms-conditions](http://www.jm.com/terms-conditions).

## Installation/Application



Self-Adhered

- Prime EPDM membrane with JM Tape Primer or JM Tape Primer (Low VOC) before applying JM EPDM Peel & Stick Walkpads.
- Minimize installation over seams and membrane splices whenever possible.
- On mechanically fastened systems, avoid installation over fasteners and plates in the seams.
- Do not install in direct contact with asphalt or coal tar pitch.
- Refer to JM EPDM applicator guides or detail drawings for instructions.

## Packaging and Dimensions

Size	30" x 30" (76.2 cm x 76.2 cm)
Thickness	
Membrane	0.375" (9.53 mm)
Tape	0.025" (0.64 mm)
Total	0.400" (10.17 mm)
Pads per Pallet	50
Coverage per Pallet	312.5 ft <sup>2</sup> (29.03 m <sup>2</sup> )

## Storage

Shelf Life	18 months from manufacture date
Storage Conditions	Store indoors, out of direct sunlight, and keep clean and dry prior to application.
Temperature Range	60°F – 80°F (16°C – 27°C)