


Meets or exceeds the criteria for ASTM D 6878

Features and Components

Use: On curbs and parapet walls. This product eliminates the need for field cutting and edge sealant.

Materials: 60 mil (1.5 mm) thick, reinforced TPO (thermoplastic polyolefin) membrane, with an encapsulated edge.

Color: White; Grey; and Tan

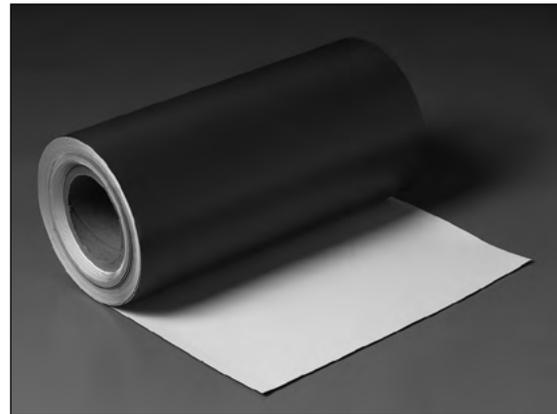

Component

A

Accessory

Single Ply

Type

FC

Curb/Corner

System Compatibility This product may be used as a component in the following systems. Please reference product application for specific installation methods and information.

Multi-Ply	BUR		APP		SBS			
	HA	CA	CA	HW	HA	CA	HW	SA
Do not use with Multi-Ply systems								

Single Ply	TPO		PVC		EPDM		
	MF	FA	MF	FA	MF	FA	BA
Compatible with the selected Single Ply systems above							

Key: HA = Hot Applied CA = Cold Applied HW = Heat Weldable SA = Self Adhered MF = Mechanically Fastened FA = Fully Adhered BA = Ballasted

Peak Advantage® Guarantee Information

Systems
Approved for use in any JM Peak Advantage Guarantee System

Installation/Application



Fully Adhered



Hot Air Weld

- Do not install JM TPO Curb Flashing in direct contact with asphalt.
- Refer to JM TPO applicator guides or detail drawings for instructions.

Packaging and Dimensions

Roll Size	18" x 50' (45.7 cm x 15.24 m)
Nominal Thickness	0.060" (1.5 mm)
Weight per Roll	25 lb (11.3 kg)
Coverage per Roll	75 ft ² (6.97 m ²)
Linear ft (m) per Roll	50 lin ft (15.24 lin m)
Rolls per Container	1

Storage

Storage Conditions	Store indoors, out of direct sunlight, in a cool, dry location
--------------------	--