

### Features and Components

ValuWeld G is used as a cap or flashing sheet in APP multi-ply roofing systems.


**Ceramic-Coated Roofing Granules:** Specifically engineered for optimal embedment in the APP-blended sheet. The ceramic coating promotes excellent long-term adhesion.

Standard granule colors are available in white and black only.

**APP (Atactic Polypropylene) Polymer and Asphalt Blend:** Provides an extremely durable sheet with excellent weathering characteristics, flexibility and dimensional stability for ease of handling and quick installations.

**Polyester Reinforcement Mat:** Offers good tensile strength, toughness and puncture resistance and can accommodate stresses created by typical rooftop expansion and contraction forces.

**Surfacing:** Fine mineral parting agent on the bottom side. This enables the product to be applied with cold adhesive.

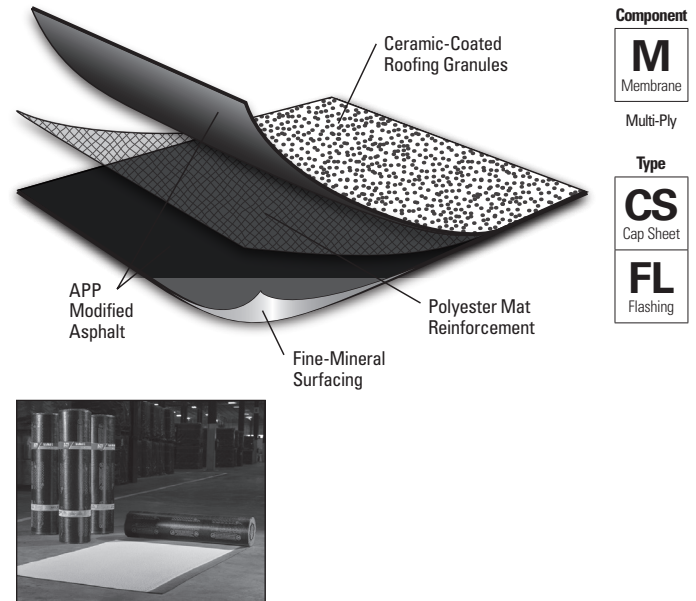

**Colors:** White and Black only.

**System Compatibility** *This product may be used as a component in the following systems. Please reference product application for specific installation methods and information.*

Multi-Ply	BUR		APP		SBS			
	HA	CA	CA	HW	HA	CA	HW	SA
<b>Compatible with the selected Multi-Ply systems above</b>								

Single Ply	TPO		PVC		EPDM		
	MF	FA	MF	FA	MF	FA	BA
<b>Do not use in Single Ply systems</b>							

**Key:** HA = Hot Applied CA = Cold Applied HW = Heat Weldable SA = Self Adhered MF = Mechanically Fastened FA = Fully Adhered BA = Ballasted

### Energy and the Environment

Pre-consumer Recycled Content	0%
Post-consumer Recycled Content	0%

### Product Application



Cold Applied

Refer to JM APP modified bitumen specifications and detail drawings for application and slope information.

### Packaging and Dimensions

Roll Coverage*	95.8 ft <sup>2</sup> (8.90 m <sup>2</sup> )
Roll Width	39 3/8" (1 m)
Roll Length	33' (10.06 m)
Roll Weight	114 lb (51.71 kg)
Rolls per Pallet	25
Pallets per Truck**	16

\*Assumes a 4" side lap.

\*\* Assumes a 48' flatbed truck.