

## Meets the requirements of ASTM D 6223, Type II, Grade G

### Features and Components


TRICOR M FR CR is used as a premium cap or flashing sheet in APP multi-ply roofing systems.

**Ceramic-Coated Roofing Granules With Factory-Applied Cool Roof Coating:** The cool roof technology combines the proven UV protection of ceramic-coated granules with a highly reflective coating, offering long-term performance and potential energy savings.

**Premium APP Polymer and Asphalt Blend:** Provides an extremely durable sheet with excellent weathering characteristics, flexibility and dimensional stability for ease of handling and quick installations. The FR blend contains additional fire retardant additives.

**Fiber Glass/Polyester Reinforcement Mat:** Combines the excellent tensile strength, toughness and puncture resistance of a polyester mat with the dimensional stability and lay-flat characteristics of fiber glass.

**Surfacing:** Fine mineral parting agent on the bottom side. Enables the product to be applied using cold adhesive or heat welding.

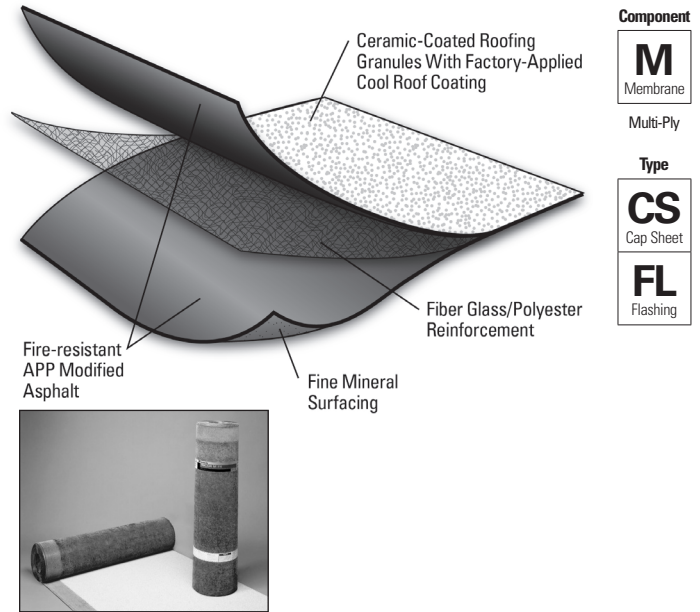

Colors: Bright white only

### System Compatibility *This product may be used as a component in the following systems. Please reference product application for specific installation methods and information.*

Multi-Ply	BUR			APP			SBS		
	HA	CA	HW	HA	CA	HW	SA	MF	
<b>Compatible with the selected Multi-Ply systems above</b>									

Single Ply	TPO				PVC			EPDM	
	MF	AD	SA	IW	MF	AD	IW	MF	AD
<b>Do not use in Single Ply systems</b>									

Key: HA = Hot Applied CA = Cold Applied HW = Heat Weldable SA = Self Adhered MF = Mechanically Fastened IW = Induction Weld BA = Ballasted AD = Adhered


### Energy and the Environment

CRRC**	Test	Initial	3-Year Aged**
		Reflectivity (ASTM C 1549)	0.83
	Emissivity (ASTM C 1371)	0.91	0.88
Rated Product ID: 0662-0007b Licensed Manufacturer ID: 0662 Classification: Production Line			
LEED®	Solar Reflectance Index (SRI) - E 1980	104	95
	Recycled Content	0%	

\* Cool Roof Rating Council ratings are determined for a fixed set of conditions, and may not be appropriate for determining seasonal energy performance. The actual effect of solar reflectance and thermal emittance on building construction may vary.

Manufacturer of product stipulates that these ratings were determined in accordance with the applicable Cool Roof Rating normal procedures.

\*\* Tested in accordance with Rapid Ratings D7897.



### Peak Advantage® Guarantee Information

Systems	Guarantee Term
Dependent on system*	Up to 30 years


\*Contact JM Technical Services for specific system requirements or guarantee terms.

### Codes and Approvals



- UL® Class A ratings may be obtained in numerous constructions, both new and re-roof at slopes up to 1" per foot (83 mm/m).

### Product Application



- Refer to JM APP modified bitumen specifications and detail drawings for application and slope information.

### Packaging and Dimensions

Roll Width	39 3/8" (1 m)
Roll Length	34' 1" (10.4 m)
Roll Coverage*	99.5 ft² (9.2 m²)
Roll Weight	122 lb (55.3 kg)
Rolls per Pallet	20
Pallets per Truck**	19

\*Assumes a 4" side lap.

\*\* Assumes a 48' flatbed truck.

**This is a special order product. Contact your JM Sales Representative about availability and lead times.**

Refer to the Safe Use Instructions and product label prior to using this product. The Safe Use Instructions are available by calling (800) 922-5922 or on the Web at [www.jm.com/roofing](http://www.jm.com/roofing).



# TRICOR™ M FR CR

Premium, Fire-Retardant, Fiber Glass/Polyester-Reinforced  
APP Mineral-Surfaced Cool Roof Cap or Flashing Sheet

Meets the requirements of ASTM D 6223, Type II, Grade G

## Tested Physical Properties

Physical Properties		ASTM Test Method	Standard for ASTM D 6223, Type II, Grade G	TRICOR M FR CR		
				MD*	XMD**	
Strength	Tear Resistance @ 73.4° F	D 4073 / 5147	≥ 180 lbf	545 lbf	564 lbf	
	Peak Load at 0°F (-18°C)	D 5147	≥ 200 lbf/in-width	384 lbf/in-width	404 lbf/in-width	
	Peak Load at 73.4°F (23°C)	Unconditioned	D 5147	≥ 100 lbf/in-width	204 lbf/in-width	181 lbf/in-width
		90-Day Heat Conditioned	D 5147 / 5869	≥ 100 lbf/in-width	329 lbf/in-width	326 lbf/in-width
Longevity	Low Temp. Flexibility @ 180° on 1" Mandrel (Pass-Fail)	Unconditioned	D 5147	Pass @ 32° F "none of the specimens show cracking"	Pass	
		90-Day Heat Conditioned	D 5147 / 5869		Pass	
	Low Temperature Unrolling (Pass-Fail) Unroll in 4-6s; Visual Inspection in "unrolled" position	D 5636	Pass @ 41° F "none of the specimens show cracking"	Pass		
	Compound Stability - 2 hr 15 min @ 230° F (Pass-Fail)	D 5147	Pass "no failures showing signs of flowing, dripping, or drop formation"	Pass		
	Granule Loss	D 4977/5147	2 g (0.07 oz)	NA		
	Thickness	D 5147	≥ 160 mils	180 mils		
	Bottom Coating Thickness	D 5147	≥ 40 mils	60 mils		
	Water Absorption - water by distillation	D 5147 / 95	≤ 3.2 %	1.4%		
	Moisture Content - water by distillation	D 5147 / 95	≤ 1 %	0.2%		
	Ultimate Elongation at 73.4°F	D 6222				
	Elongation at Peak Load @ 0° F	D 5147	≥ 3 %	5%	5%	
	Elongation at Peak Load @ 73.4° F	Unconditioned	D 5147	≥ 3 %	6%	5%
		90-Day Heat Conditioned	D 5147 / 5869	≥ 3 %	5%	6%
Installation	Dimensional Stability - 24 hr @ 176° F	D 5147 / 1204	≤ 1 %	0.2%	<0.1%	
	Net Mass per Unit Area	D 146	≥ 90 lb/100 ft <sup>2</sup>	109 lb/100 ft <sup>2</sup>		

\*MD = Machine Direction

\*\*XMD = Cross-Machine Direction

Note: All data represents tested values.