

Features and Components

Reflective Roofing Granules: Bright white granules specifically designed for high reflectivity and durability.



Photo not actual size, granules are shown at approximately 10X magnification.

Component
ST
 Surface Treatment
 Multi-Ply

Type
PT
 Protection

Color

Bright White

System Compatibility This product may be used as a component in the following systems. Please reference product application for specific installation methods and information.

Multi-Ply	BUR		APP		SBS			
	HA	CA	CA	HW	HA	CA	HW	SA
For use as a surfacing material in the selected asphalt roofing products above								

Single Ply	TPO		PVC		EPDM	
	MF	FA	MF	FA	MF	BA
Not for use in Single Ply systems						

Key: HA = Hot Applied CA = Cold Applied HW = Heat Weldable SA = Self Adhered MF = Mechanically Fastened FA = Fully Adhered BA = Ballasted

Energy and the Environment


CRRC**	Test	Initial	3-Year Aged**
	Reflectivity (ASTM C 1549)	0.72	0.67
	Emissivity (ASTM C 1371)	0.89	0.89
Rated Product ID: 0662-0042a Licensed Manufacturer ID: 0662 Classification: Production Line			
LEED®	Solar Reflectance Index (SRI) - E 1980	88	81
	Recycled Content	0%	

* Cool Roof Rating Council ratings are determined for a fixed set of conditions, and may not be appropriate for determining seasonal energy performance. The actual effect of solar reflectance and thermal emittance on building construction may vary.

Manufacturer of product stipulates that these ratings were determined in accordance with the applicable Cool Roof Rating normal procedures.

** Tested in accordance with Rapid Ratings D7897.

Installation/Application

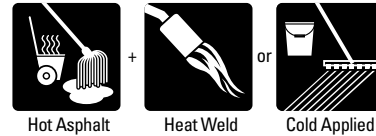

Packaging and Dimensions

Package Size	4.25 gal pail
Pail Weight	41 lb (18.6 kg)
Pails per Pallet	36
Pallet Weight	1,516 lb (687.7 kg)
Pallets per Truck*	26

*Assumes 48' flatbed truck.