


Features and Components

Use: To prime JM EPDM membrane surfaces for adhering JM EPDM Tape and Peel and Stick products.

Type: One-part, solvent-based membrane primer.

Color: Clear

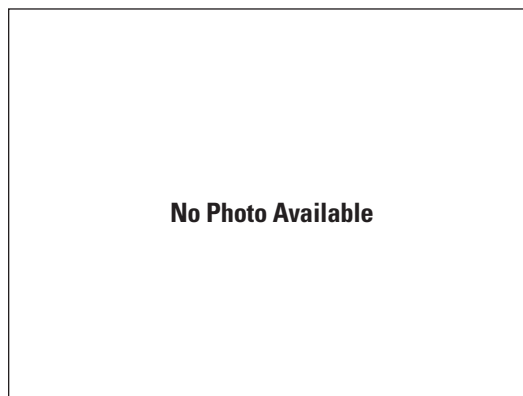

Component



Type



System Compatibility This product may be used as a component in the following systems. Please reference product application for specific installation methods and information.

Multi-Ply	BUR		APP		SBS			
	HA	CA	CA	HW	HA	CA	HW	SA
Do not use in Multi-Ply systems								

Single Ply	TPO		PVC		EPDM		
	MF	AD	MF	AD	MF	AD	BA
Used to prime Membranes in EPDM Single Ply systems							

Key: HA = Hot Applied CA = Cold Applied HW = Heat Weldable SA = Self Adhered MF = Mechanically Fastened AD = Adhered BA = Ballasted

Energy and the Environment

Maximum VOC	685 g/l ¹ (EPA Method 24)
-------------	--------------------------------------

1. Exceeds limits in SCAQMD rule 1168

Precautions

Johns Manville EPDM Tape Primer is a combustible material and should be shipped and stored away from open flames, heat or sources of ignition. Keep all pails tightly sealed while in storage. It should be used only in well-ventilated areas. It may cause eye, skin and respiratory irritation, and is harmful or fatal if swallowed. Avoid contact with skin. Use impervious clothing and rubber gloves to avoid prolonged or repeated contact with skin. Read the container label and follow all safety instructions.

Installation/Application



Scubber Pad

- Do not install in direct contact with asphalt or coal tar pitch.
- Refer to the application instructions guidelines for proper utilization of this primer.

Packaging and Coverage

Container Sizes	4 – 1 gal (3.8 l) cans per box	3 gal (11.4 l) pail
Shipping Weight (approx.)	30 lb (13.6 kg) per box	22 lb (9.8 kg) per pail
Containers per Pallet	54	45
Pallets per Truck	24	24
Coverage Rate*	200 ft ² /gal (16.1 m ² /l)	

* Coverage, open and dry time rates can vary dramatically depending on the particular substrate and environmental conditions. Coverage rates stated herein are approximate only. If FM Global® or UL® approval is required, consult specific RoofNavSM or the UL Certifications Directory for specific application rates.

Storage

Shelf Life	9 months from manufacture date
Storage Conditions	Clean, dry, indoor environment, out of direct sunlight, in the original unopened container.
Temperature Range	40°F – 90°F (4.4°C – 32.2°C) - Protect from freezing

Exposure Window

Keep can or pail tightly closed when not in use and protect from moisture contamination. Once exposed to moisture in the air, JM EPDM Tape Primer begins to cure and may gel within 24 hours.