

Meets the requirements of ASTM C 1289, Type II, Class 4, Grade 1

Features and Components

High-Density Polyisocyanurate Foam Core: Closed cell polyisocyanurate foam technology provides additional insulation value (R-value of 2.5), with lightweight and low water absorption characteristics.

Inorganic Coated Glass Facers: (With no cellulose) Provide improved resistance to mold growth, as well as a smooth surface that performs well with self-adhering systems, and efficient adhesive application in adhered single ply systems.

Lightweight: Offers labor and installation efficiencies and allows more options for situations where the overall weight is a concern. This also means easy hoisting, staging and maneuvering around the roof.


High R-Value (2.5 R): Provides significantly more thermal insulation (R-value) than wood fiber or gypsum boards.

User Friendly: ProtectoR HD allows easy & efficient scoring, cutting and snapping which permits fast, tight fabrication and all in a low dust environment.

Resistance To Damage: High impact, flexural and compressive strength provides a protective layer for insulation while working with the membrane above to ensure maximum performance and longevity.

Up to 50% Fewer Fasteners: Achieves FM 1-90 utilizing 8 fasteners per 4' x 8' board with an adhered reinforced membrane and 11 fasteners per 4' x 8' board with an adhered non-reinforced membrane over a min. 22 ga steel deck or structural concrete deck. Refer to fastening patterns on page 2.

Fire Resistance: Achieves UL Class A approval directly over a combustible wood deck up to 1/2:12" slope.

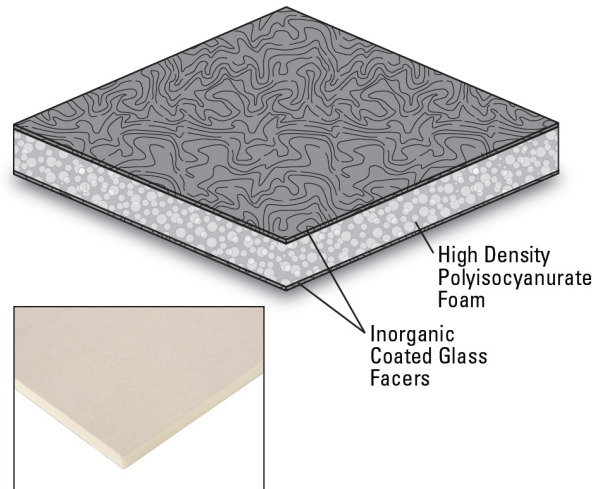

Component

B
Cover Board

Multi-Ply
Single Ply

Type

PF
Poly Foam

HD
High Density

System Compatibility This product may be used as a component in the following systems. Please reference product application for specific installation methods and information.

Multi-Ply	BUR		APP		SBS			
	HA	CA	HW	HA	CA	HW	SA	MF
Compatible with the selected Multi-Ply systems above								

Single Ply	TPO				PVC			EPDM		
	MF	AD	SA	IW	MF	AD	IW	MF	AD	BA
Compatible with the selected Single Ply systems above										

Key: HA = Hot Applied CA = Cold Applied HW = Heat Weldable SA = Self Adhered MF = Mechanically Fastened IW = Induction Weld BA = Ballasted AD = Adhered

Energy and the Environment

LEED®	Recycled Content	Pre-Consumer: 3.7%
		Post-Consumer: 0%

Peak Advantage® Guarantee Information

Systems	Guarantee Term*
When used in most JM multi-ply or single ply systems	Up to 30 years

* Contact JM Technical Services for specific systems.

Codes and Approvals



- FM® Standards 4450/4470 Approvals (refer to FM RoofNavSM)
- UL® Standard 790 (refer to UL Roofing Materials system directory)

Technical specifications as shown in this literature are intended to be used as general guidelines only. Please refer to the Safety Data Sheet and product label prior to using this product. The Safety Data Sheet is available by calling (800) 922-5922 or on the web at www.jm.com/roofing. The physical and chemical properties of the product listed herein represent typical, average values obtained in accordance with accepted test methods and are subject to normal manufacturing variations. They are supplied as a technical service and are subject to change without notice. Check with the regional sales representative nearest you for current information.

Installation/Application



Typically installed as a protective cover board over insulation or an existing roof directly beneath the waterproofing membrane. Boards are to be butted tightly together with joints offset a minimum of 6". This product to be installed with the printed side facing the deck. Refer to the Application Guides and Detail Drawings for instructions.

Packaging and Dimensions

Sizes	4' x 4' x 1/2" (1.22 m x 1.22 m x 12.7 mm)	4' x 8' x 1/2" (1.22 m x 2.44 m x 12.7 mm)
Board Weight	6 lb (2.72 kg)	12 lb (5.4 kg)
Coverage/Pallet	704 ft ²	1,408 ft ²
Boards/Pallet	44	44
Pallet Weight	264 lb (119.7 kg)	528 lb (239.4 kg)
Pallets per Truck*	96	48
Producing Locations	Cornwall, ON	Jacksonville, FL Hazleton, PA Fernley, NV Bremen, IN
Stocking Locations	Tracy, CA	Grand Prairie, TX

* Assumes 48' flatbed truck.


Meets the requirements of ASTM C 1289, Type II, Class 4, Grade 1
Typical Physical Properties

Test	ASTM	ProtectoR HD Cover Board
Strength	Compressive Strength, psi (kPa)	D 1621 Grade 1 - 109 psi (751 kPa) (<i>max</i>)
	Flexural Strength Modulus of Rupture, psi (kPa), <i>nom</i> Breakload, lbf (kN), <i>nom</i>	D 1037 675 psi (4654 kPa) 40 lbf (0.18 kN)
	Flute Spanability, inches, <i>max</i>	E 661 9.5
	Dimensional Stability, % Linear Change, <i>nom</i>	D 2126 0.5%
Moisture	Moisture Vapor Permeance, perm (ng/(Pa•s•m ²)), <i>max</i>	E 96 <1 perm, 57.5 ng/(Pa•s•m ²)
	Water Absorption, % by vol	C 209 1.5% (<i>max</i>)
	Surface Water Absorption, gram, <i>max</i>	C 473 <1 gram
	Mold Resistance	D 3273 Pass
Installation	Weight, lb-ft ² (kg-m ²), <i>nom</i>	N/A 0.375 lb-ft ² (1.83 kg-m ²)
	Weight per board (4' x 8'), lb (kg), <i>nom</i>	N/A 12 lb (5.4 kg)


Thermal Performance

Thickness		Nominal R-Value (Resistance) (hr•ft ² •°F)/BTU
in	mm	
1/2	12.7	2.5

JM Recommended Fastening Patterns When Utilized with an Adhered Membrane

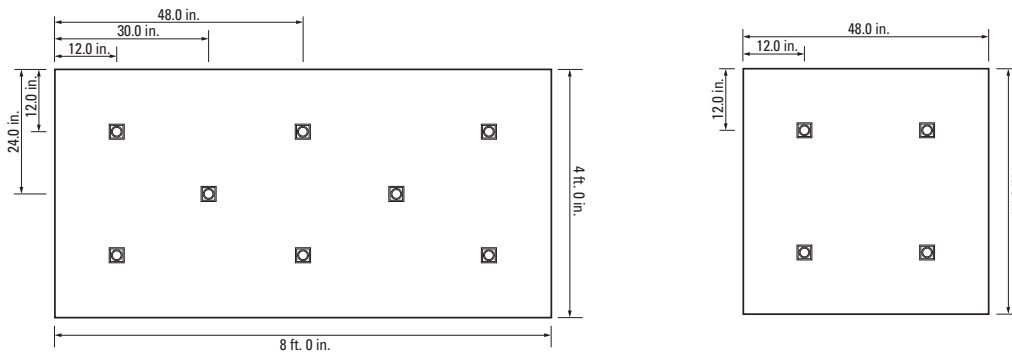

8 per 4' x 8' board achieves FM 1-90 with adhered reinforced membrane or FM 1-75 with adhered non-reinforced membrane applications over a min. 22 ga steel deck or structural concrete deck.

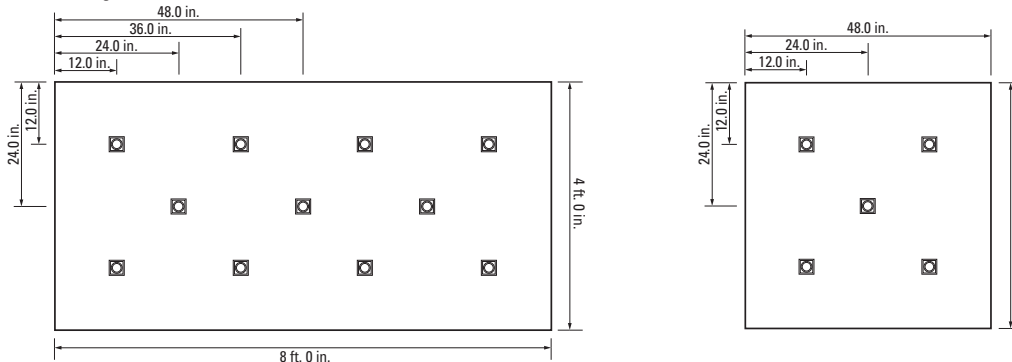

11 per 4' x 8' board achieves FM 1-90 with adhered non-reinforced membrane applications over a min. 22 ga steel deck or structural concrete deck.

All Johns Manville products are sold subject to Johns Manville's standard Terms and Conditions, which includes a Limited Warranty and Limitation of Remedy. For a copy of the Johns Manville standard Terms and Conditions or for information on other Johns Manville roofing products and systems, visit www.jm.com/terms-conditions.