

Features and Components

Lite-Deck Fasteners are available in lengths from 2⁵/₈" to 12" (67 mm to 305 mm), come with a square drive and offer coarse thread to provide high pullout resistance.

Lite-Deck plates are 3" (76 mm) round, Galvalume[®]-coated plates for use with Lite-Deck Fasteners.

Use: Insulation

Fastener: Steel


Head: #3 Square Drive

Plate: 3" (76 mm) Galvalume-Coated Steel - Round

Color: Black (fasteners) Grey (plates)

Deck Type: Gypsum, and Cementitious Wood Fiber

* Galvalume is a registered trademark of BIEC International, Inc. and some of its licensed producers.

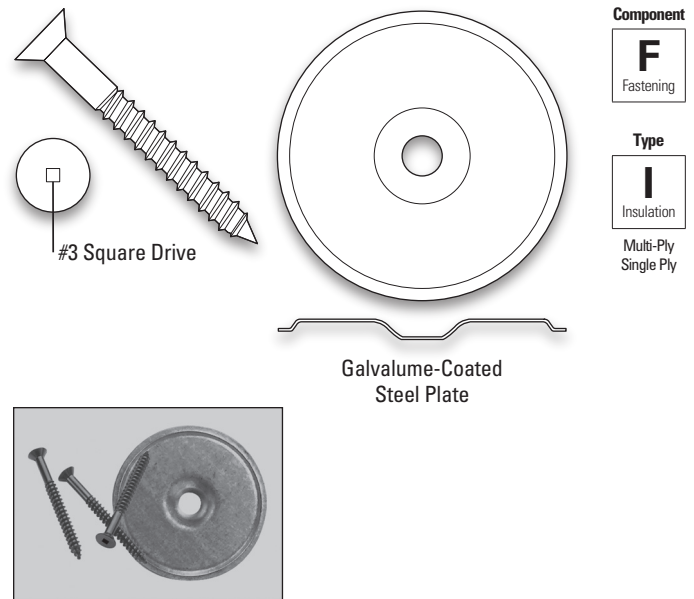

System Compatibility *This product may be used as a component in the following systems. Please reference product application for specific installation methods and information.*

Multi-Ply	BUR		APP		SBS				
	HA	CA	CA	HW	HA	CA	HW	CA	MF
<i>Use to fasten Insulation in all Multi-Ply systems</i>									

Single Ply	TPO		PVC		EPDM		
	MF	FA	MF	FA	MF	FA	BA
<i>Use to fasten Insulation in the selected Single Ply systems above</i>							

Key: HA = Hot Applied CA = Cold Applied HW = Heat Weldable SA = Self Adhered MF = Mechanically Fastened FA = Fully Adhered BA = Ballasted

Energy and the Environment

Recycled Content	This steel based product contains a minimum of 25% post consumer recycled materials by weight
------------------	---

Peak Advantage[®] Guarantee Information

Systems	Approved to use with any Peak Advantage Guarantee
---------	---

Codes and Approvals*



*Fastener approvals are based on system approvals

Installation/Application

The Lite-Deck Fastener can be installed into cementitious wood fiber decks without pre-drilling. A pilot hole is required for gypsum; hole size is determined by pullout results. The OMG Lite-Deck Fastener must penetrate the deck a minimum of 2-in. Drive the fastener until a slight depression is seen around the plate, or with rigid insulation boards, drive fastener until the plate begins to dimple.

Packaging and Dimensions

Fastener Lengths	Plate Diameter	Quantity/Container
2 ⁵ / ₈ " - 4" (6.7 - 10.2 cm)	3" (7.6 cm) round	500/pail
5" - 8" (12.7 - 20.3 cm)	3" (7.6 cm) round	250/pail
9" - 12" (22.9 - 30.5 cm)	3" (7.6 cm) round	125/pail
Plates	3" (7.6 cm) round	500/box
Producing Locations*	Agawam, MA and Itasca, IL	

* The point of manufacture for fasteners and plates varies depending on the specific part. Call your local JM sales professional for assistance.