

Features and Components



All Purpose Fasteners are #14 case-hardened steel fasteners with a #3 Phillips head. The point is designed for quick installation in new or re-roof applications.

- Use:** Membranes and Insulation
- Material:** Case-hardened steel
- Gauge:** #14
- Head:** #3 Phillips head
- Color:** Grey
- Deck Types:** Wood, Concrete, and 18 - 24 gauge (1.25 mm - 0.56 mm) Metal.

Plate Compatibility*

- UltraFast® Locking Plastic Plates
- UltraFast® Metal Plates
- High Load Plates (not pictured)
- APB Plates (not pictured)
- RhinoPlate (concrete decks)

* See corresponding data sheets for information regarding UltraFast, High Load, and APB Plates.

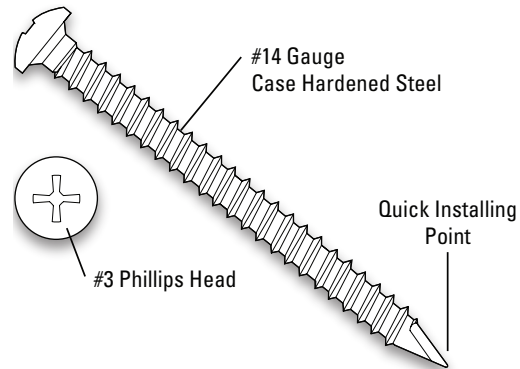

| |
|-------------------------|
| Component |
| F Fastening |
| Type |
| I Insulation |
| M Membrane |
| Multi-Ply Single Ply |

System Compatibility *This product may be used as a component in the following systems. Please reference product application for specific installation methods and information.*

| Multi-Ply | BUR | | APP | | SBS | | | | |
|---|-----|----|-----|----|-----|----|----|----|----|
| | HA | CA | CA | HW | HA | CA | HW | CA | MF |
| <i>Use to fasten Insulation and select base sheets in Multi-Ply systems</i> | | | | | | | | | |

| Single Ply | TPO | | PVC | | EPDM | | |
|---|-----|----|-----|----|------|----|----|
| | MF | FA | MF | FA | MF | FA | BA |
| <i>Use to fasten Membranes and Insulation in Single Ply systems</i> | | | | | | | |

Key: HA = Hot Applied CA = Cold Applied HW = Heat Weldable SA = Self Adhered MF = Mechanically Fastened FA = Fully Adhered BA = Ballasted

Energy and the Environment

| | |
|------------------|---|
| Recycled Content | This steel based product contains a minimum of 25% post consumer recycled materials by weight |
|------------------|---|

Peak Advantage® Guarantee Information

| | |
|---------|---|
| Systems | Approved to use with any Peak Advantage Guarantee |
|---------|---|

Codes and Approvals*



*Fastener approvals are based on system approvals

Installation/Application

- Steel deck: minimum 3/4" penetration
- Wood deck: minimum 1" penetration
- Concrete deck: Pilot hole @ 3/16" diameter, 1-1/2" depth, minimum 1" embedment

Packaging and Dimensions

| Fastener Sizes | Quantity per Container |
|----------------------------------|-------------------------|
| 1 1/4" to 4" (3.2 cm to 10.2 cm) | 1,000/pail |
| 5" to 11" (12.7 cm to 27.9 cm) | 500/pail |
| 12" to 24" (30.5 cm to 61.0 cm) | 250/box |
| Producing Locations* | Agawam, MA & Itasca, IL |

* The point of manufacture for fasteners and plates varies depending on the specific part. Call your local JM sales professional for assistance.