



### Meets the following requirements:

#### ValuTherm CGF / Tapered ValuTherm CGF

- CAN/ULC S704, Type 2, Class 3 (140 kPa)
- ASTM C 1289, Type II, Class 2, Grade 2


#### ValuTherm25 PSI CGF / Tapered ValuTherm 25 PSI CGF

- CAN/ULC S704, Type 3, Class 3 (170 kPa)
- ASTM C 1289, Type II, Class 2, Grade 3

### Features and Components

**Inorganic Coated Glass Facers:** (With no cellulose) Provide improved resistance to mold growth, as well as a smooth surface that performs well with self-adhering systems, and efficient adhesive application in fully adhered single ply systems.

**Closed Cell Polyisocyanurate Foam Core:** Provides high R-value per inch in built-up, modified bitumen, metal roof and single ply roof systems, and utilizes an environmentally compliant blowing agent that provides high thermal insulation performance.

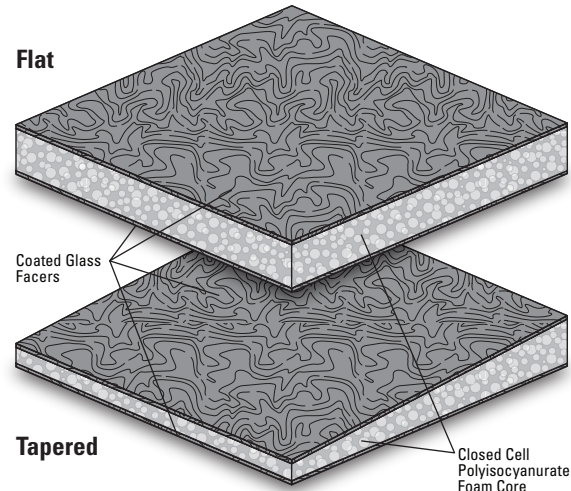

<b>Component</b>	<b>I</b> Insulation
	Multi-Ply Single Ply
<b>Type</b>	<b>HT</b> High Thermal
	<b>TP</b> Tapered

**System Compatibility** This product may be used as a component in the following systems. Please reference product application for specific installation methods and information.

Multi-Ply	BUR			APP			SBS			
	HA*	CA	HW	HA*	CA	HW	SA	MF		
Compatible with the selected Multi-Ply systems above										

Single Ply	TPO				PVC			EPDM		
	MF	AD	SA	IW	MF	AD	IW	MF	AD	BA
Compatible with all Single Ply systems										

**Key:** HA = Hot Applied CA = Cold Applied HW = Heat Weldable SA = Self Adhered MF = Mechanically Fastened IW = Induction Weld BA = Ballasted AD = Adhered  
\* Can mop approved cover boards only.

### Energy and the Environment

LEED®	Recycled Content	Varies with thickness, see <i>Product Data and Packaging</i> table on next page.
Produced with a pentane blowing agent with zero ozone depletion and virtually no global warming potential.		

### Peak Advantage® Guarantee Information

Systems
Not eligible for Peak Advantage Guarantees

### Codes and Approvals



- FM® Standards 4450/4470 Approvals (refer to FM RoofNav™)
- UL® Standard 790, 263 and 1256 (refer to UL Roofing Materials system directory)
- Meets CAN/ULC S107M & CAN/ULC S126
- California Code of Regulations, Title 24, Insulation Quality Standard License #T1-1341
- Third-party certification with the PIMA Quality Mark™ for Long-Term Thermal Resistance (LTRR) values

Refer to the Safe for Use instructions and product label prior to using this product. The Safe for Use instructions are available by calling (800) 922-5922 or on the Web at [www.jm.com/roofing](http://www.jm.com/roofing).

Note: Technical information on this data sheet is intended to be used as a general guideline only and is subject to change without notice. Contact your JM Sales Representative for further details.

### Installation/Application



Refer to the application instructions guidelines for proper utilization of this product.

#### Flute Span:

Width of Rib Opening:	Up to 2 <sup>5</sup> / <sub>8</sub> " (6.67 cm)	Up to 4 <sup>3</sup> / <sub>8</sub> " (11.11 cm)
Insulation Thickness (min):	1.0" (2.54 cm)	1.5" to 4.5" (3.8 to 11.4 cm)

### Packaging and Dimensions

Standard Sizes <sup>1</sup>	4' x 4' (1.22 m x 1.22 m)	4' x 8' (1.22 m x 2.44 m)
Tapered Size <sup>2</sup>	4' x 4' (1.22 m x 1.22 m)	
Producing Locations	Bremen, IN Hazleton, PA	Cornwall, ONT Jacksonville, FL
Stocking Locations <sup>3</sup>	Grand Prairie, TX	Southgate, CA Tracy, CA

1. For available thicknesses, see *Product Data and Packaging* table on page 2 of this data sheet. Other sizes available by special request, some sizes are not stocked but can be special ordered with minimum order quantities. Contact your JM Sales Representative for details.
2. Tapered ValuTherm CGF and Tapered ValuTherm 25 PSI CGF are available in thicknesses of 1/2" to 4". Available profiles are shown on page 3 of this data sheet. In some regions extended panels are also available.
3. Not all sizes, thicknesses, and products are stocked at all locations, please call Customer Service at 1-877-766-3295.

### Typical Physical Properties

Test		ASTM	Values
Strength	Tensile Strength	C 209	24 kPa ( <i>min</i> ), 35 kPa ( <i>nom</i> )
	Compressive Strength, @ 10% Deformation, ( <i>min</i> )	C 1621	Type 2: 140 kPa, Type 3: 170 kPa
	Dimensional Stability Change, ( <i>length and width</i> )	D 2126	0.5% ( <i>nom</i> ), 2% ( <i>max</i> )
Moisture	Moisture Vapor Permeance	E 96	<1 perm, 57.5 ng/(Pa•s•m <sup>2</sup> )
	Water Absorption	C 209	1% ( <i>max</i> )
	Resistance to Mold	D 3273	Pass (10)
Installation	Service Temperature	D 1623	-73°C to 121°C
	Flame Spread, ( <i>foam core</i> )	E 84	20 - 30 ( <i>nom</i> ), 75 ( <i>max</i> )
	Smoke Developed, ( <i>foam core</i> )	E 84	55 - 250 ( <i>nom</i> ), 450 ( <i>max</i> )

### Product Data and Packaging

Thickness		Long-Term Thermal Resistance (LTTR) Values <sup>1</sup>		Total Recycled Content <sup>2</sup>	Boards/Pallet	Square Feet/Pallet		Pallets/Truck <sup>3</sup>	
in.	mm	(hr•ft <sup>2</sup> •F)/BTU	m <sup>2</sup> •°C/W	(all pre-consumer)	4x4 and 4x8	4x4	4x8	4x4	4x8
1.0	25.4	5.7	1.00	5.3%	48	768	1536	48	24
1.1	27.9	6.3	1.10	5.4%	41	656	1312		
1.2	30.5	6.8	1.20	5.5%	38	608	1216		
1.25	31.8	7.1	1.25	5.5%	35	560	1120		
1.3	33.0	7.4	1.30	5.6%	35	560	1120		
1.4	35.6	8.0	1.41	5.6%	32	512	1024		
1.5	38.1	8.6	1.51	5.7%	32	512	1024		
1.6	40.6	9.1	1.61	5.8%	28	448	896		
1.7	43.2	9.7	1.71	5.8%	27	432	864		
1.75	44.5	10.0	1.76	5.8%	27	432	864		
1.8	45.7	10.3	1.81	5.8%	25	400	800		
1.9	48.3	10.8	1.91	5.8%	24	384	768		
2.0	50.8	11.4	2.01	5.9%	24	384	768		
2.1	53.3	12.0	2.11	5.9%	21	336	672		
2.2	55.9	12.6	2.22	6.0%	20	320	640		
2.3	58.4	13.2	2.32	6.0%	20	320	640		
2.4	61.0	13.8	2.43	6.0%	19	304	608		
2.5	63.5	14.4	2.53	6.0%	19	304	608		
2.6	66.0	15.0	2.64	6.0%	18	288	576		
2.7	68.6	15.6	2.74	6.1%	17	272	544		
2.8	71.1	16.2	2.85	6.1%	16	256	512		
2.9	73.7	16.8	2.96	6.1%	16	256	512		
3.0	76.2	17.4	3.06	6.2%	16	256	512		
3.1	78.7	18.0	3.17	6.2%	14	224	448		
3.2	81.3	18.6	3.28	6.2%	14	224	448		
3.25	82.6	18.9	3.33	6.2%	14	224	448		
3.3	83.8	19.2	3.39	6.2%	14	224	448		
3.4	86.4	19.9	3.50	6.2%	13	208	416		
3.5	88.9	20.5	3.61	6.2%	13	208	416		
3.6	91.4	21.1	3.72	6.2%	12	192	384		
3.7	94.0	21.7	3.82	6.2%	12	192	384		
3.75	95.3	22.0	3.88	6.3%	12	192	384		
3.8	96.5	22.3	3.94	6.3%	12	192	384		
3.9	99.1	23.0	4.05	6.3%	12	192	384		
4.0	101.6	23.6	4.16	6.4%	12	192	384		
4.1	104.0	24.2	4.26	6.4%	11	176	352		
4.2	107.0	24.9	4.39	6.4%	11	176	352		
4.3	109.0	25.5	4.49	6.4%	11	176	352		
4.4	112.0	26.1	4.60	6.4%	10	160	320		
4.5	114.0	26.8	4.72	6.4%	10	160	320		

1. The Long-Term Thermal Resistance (LTTR) values were determined in accordance with CAN/ULC S770 at 75°F (24°C). The ultimate R-Value of these products will depend on individual installation circumstances. 2. Value represents average results. 3. Assumes 48' flatbed truck.

Refer to the Safe for Use instructions and product label prior to using this product. The Safe for Use instructions are available by calling (800) 922-5922 or on the Web at [www.jm.com/roofing](http://www.jm.com/roofing).

**Johns Manville Tapered Polyiso Offerings** *Please refer to the previous page for typical physical properties.*

Panel Desig.	Slope	Dimension		LTTR* Value Nominal	Pieces per Unit	Square Foot per Unit	Brd Ft per Unit	Slope Profiles	
		Thin	Thick						
<b>1/16 in/ft (5.2 mm/m)</b>									
1A	1/16	0.5	0.75	3.6	70	1120	700	<p>All Panels Special Order</p>	
1B	1/16	0.75	1	5.0	50	800	700		
1	1/16	1	1.25	6.4	38	608	684		
2	1/16	1.25	1.5	7.8	32	512	704		
3	1/16	1.5	1.75	9.3	28	448	728		
4	1/16	1.75	2	10.7	22	352	660		
5	1/16	2	2.25	12.1	20	320	680		
6	1/16	2.25	2.5	13.6	18	288	684		
<b>1/8 in/ft (10.4 mm/m)</b>									
AA	1/8	0.5	1	4.3	64	1024	768	<p>Extended and Special Order Panels: D, E, F, FF</p>	
A	1/8	1	1.5	7.1	38	608	760		
B	1/8	1.5	2	10.0	26	416	728		
C	1/8	2	2.5	12.9	20	320	720		
D**	1/8	2.5	3	15.9	16	256	704		
E**	1/8	3	3.5	18.9	14	224	728		
F**	1/8	3.5	4	22.1	12	192	720		
FF**	1/8	4	4.5	25.3	10	160	680		
R	1/8	0.75	1.25	5.7	44	704	704		
S	1/8	1.25	1.75	8.6	30	480	720		
T	1/8	1.75	2.25	11.4	22	352	704		
U	1/8	2.25	2.75	14.4	16	256	640		
V	1/8	2.75	3.25	17.4	14	224	672		
W	1/8	3.25	3.75	20.5	12	192	672		
<b>3/16 in/ft (15.6 mm/m)</b>									
J	3/16	1	1.75	7.8	32	512	704	<p>All Panels Special Order</p>	
K	3/16	1.75	2.5	12.1	20	320	680		
L**	3/16	2.5	3.25	16.6	16	256	736		
M**	3/16	3.25	4	21.2	12	192	696		
JJ	3/16	0.5	1.25	5.0	52	832	728		
KK	3/16	1.25	2	9.3	28	448	728		
LL**	3/16	2	2.75	13.6	18	288	691		
MM**	3/16	2.75	3.5	18.2	14	224	694		
<b>1/4 in/ft (20.8 mm/m)</b>									
G	1/4	1	2	8.6	30	480	720		<p>Extended and Special Order Panels: Z, ZZ</p>
H	1/4	2	3	14.4	16	256	640		
I**	1/4	3	4	20.5	12	192	672		
X	1/4	0.5	1.5	5.7	48	768	768		
Y	1/4	1.5	2.5	11.4	24	384	768		
Z**	1/4	2.5	3.5	17.4	16	256	768		
ZZ**	1/4	3.5	4.5	23.6	12	192	768		
<b>3/8 in/ft (31.2 mm/m)</b>									
SS	3/8	0.5	2	7.1	36	576	720	<p>All Panels Special Order</p>	
TT**	3/8	2	3.5	15.9	16	256	704		
<b>1/2 in/ft (41.6 mm/m)</b>									
Q	1/2	0.5	2.5	8.6	32	512	768	<p>Extended and Special Order Panels: QQ</p>	
QQ**	1/2	2.5	4.5	20.5	12	192	672		
XX	1/2	1	3	11.4	22	352	704		

\* (hr•ft²•°F/Btu)

\*\* Extended panels require less adhesive and less labor.

**Tapered Recycle Content:**

Recycled content is dependent upon average thickness. To calculate, match the average thickness of Tapered ValuTherm CGF to the thickness of Flat ValuTherm CGF. Use the number from Flat ValuTherm CGF as your recycled content.

Refer to the Safe for Use instructions and product label prior to using this product. The Safe for Use instructions are available by calling (800) 922-5922 or on the Web at [www.jm.com/roofing](http://www.jm.com/roofing).