


Features and Components

Use: To easily form flashings around corners and penetrations. Specifically designed for use in areas that cannot be properly detailed with PVC field membrane.

Material: 75 mil (1.91 mm) thick, reversible, flexible, non-reinforced, UV-resistant PVC (polyvinyl chloride) with Elvaloy®* KEE (ketone ethylene ester).

Colors: White/Grey Grey ES/White
 Sandstone/White Sandstone ES/White
 White/Charcoal

* Elvaloy is a registered trademark of E. I. du Pont de Nemours and Company or its affiliates.

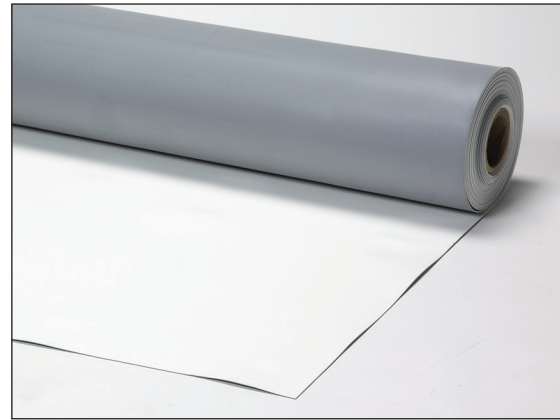

Component

A
Accessory

Single Ply

Type

FW
Flashing Wall

FC
Curb/Corner

System Compatibility This product may be used as a component in the following systems. Please reference product application for specific installation methods and information.

Multi-Ply	BUR		APP		SBS				
	HA	CA	CA	HW	HA	CA	HW	SA	MF
<i>Do not use in Multi-Ply systems</i>									

Single Ply	TPO		PVC		EPDM		
	MF	FA	MF	FA	MF	FA	BA
<i>Compatible with the selected Single Ply systems above</i>							

Key: HA = Hot Applied CA = Cold Applied HW = Heat Weldable SA = Self Adhered MF = Mechanically Fastened FA = Fully Adhered BA = Ballasted

Peak Advantage® Guarantee Information

Systems
Approved for use in any JM Peak Advantage Guarantee System

Installation/Application



Hot Air Weld

- Do not install JM PVC Detail Membrane in direct contact with asphalt or coal tar pitch
- Refer to JM PVC applicator guides or detail drawings for instructions

Packaging and Dimensions

Roll Size	36" x 50' (91.44 cm x 15.24 m)
Nominal Thickness	0.075" (1.91 mm)
Coverage per Roll	150 ft ² (13.94 m ²) (gross)
Weight per Roll	75 lb (34.0 kg)

Storage

Storage Conditions	Store indoors, out of direct sunlight, in a cool, dry location prior to application.
--------------------	--