


## Features and Components

**Use:** Primarily use to "strip-in" flashing details, gravel stops, PVC-Coated Metal joints, and exposed fasteners in the roof field.

**Material:** 60 mil (1.52 mm) thick, reinforced, UV-resistant PVC (polyvinyl chloride) with Elvaloy®\* KEE (ketone ethylene ester).

**Colors:** 6" - Black/White  
8" - White/Grey and Sandstone/White

\* Elvaloy is a registered trademark of E. I. du Pont de Nemours and Company or its affiliates.

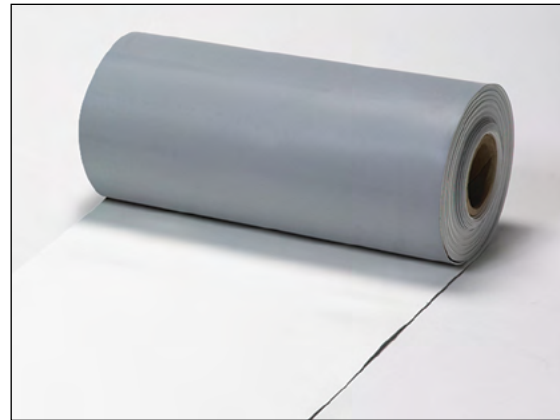

**Component**

**A**  
Accessory

Single Ply

**Type**

**MS**  
Membrane Seaming

**FE**  
Flashing Edge

**System Compatibility** This product may be used as a component in the following systems. Please reference product application for specific installation methods and information.

Multi-Ply	BUR		APP		SBS				
	HA	CA	CA	HW	HA	CA	HW	SA	MF
<b>Do not use in Multi-Ply systems</b>									

Single Ply	TPO		PVC		EPDM		
	MF	FA	MF	FA	MF	FA	BA
<b>Compatible with the selected Single Ply systems above</b>							

**Key:** HA = Hot Applied CA = Cold Applied HW = Heat Weldable SA = Self Adhered MF = Mechanically Fastened FA = Fully Adhered BA = Ballasted

## Peak Advantage® Guarantee Information

Systems
Approved for use in any JM Peak Advantage Guarantee System

## Installation/Application



Hot Air Weld

- Do not install JM PVC Detail Strip in direct contact with asphalt or coal tar pitch
- Refer to JM PVC applicator guides or detail drawings for instructions

## Packaging and Dimensions

Roll Sizes	6" x 150' (15.2 cm x 45.7 m)	8" x 150' (20.3 cm x 45.7 m)
Nominal Thickness	0.060" (1.52 mm)	
Coverage per Roll	75 ft <sup>2</sup> (6.97 m <sup>2</sup> )	100 ft <sup>2</sup> (9.29 m <sup>2</sup> )
Weight per Roll	30 lb (13.6 kg)	40 lb (18.1 kg)

## Storage

Storage Conditions	Store indoors, out of direct sunlight, in a cool, dry location prior to application.
--------------------	--------------------------------------------------------------------------------------