


Features and Components

Use: Fabricated by the contractor into metal flashings and edge details. It is used to provide monolithic water-tight protection for both adhered and mechanically fastened roofing assemblies.

Materials: 20 mil (0.51 mm) UV-resistant PVC (polyvinyl chloride) with Elvaloy®* KEE (ketone ethylene ester) membrane laminated to 24 gauge (0.6 mm) galvanized steel.

Colors: White; Grey; Sandstone; and Black

* Elvaloy is a registered trademark of E. I. du Pont de Nemours and Company or its affiliates.

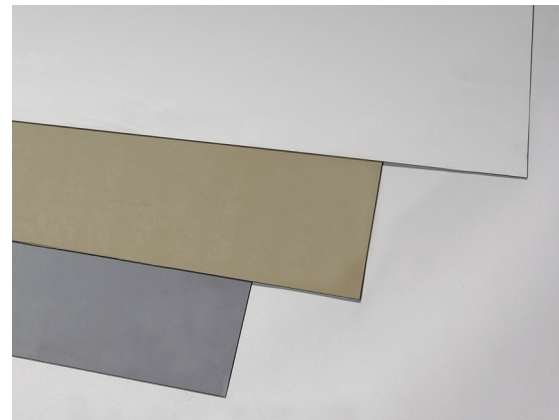

Component
A Accessory
Single Ply
Type
FE Flashing Edge

System Compatibility This product may be used as a component in the following systems. Please reference product application for specific installation methods and information.

Multi-Ply	BUR		APP		SBS				
	HA	CA	CA	HW	HA	CA	HW	SA	MF
<i>Do not use in Multi-Ply systems</i>									

Single Ply	TPO		PVC		EPDM		
	MF	FA	MF	FA	MF	FA	BA
<i>Compatible with the selected Single Ply systems above</i>							

Key: HA = Hot Applied CA = Cold Applied HW = Heat Weldable SA = Self Adhered MF = Mechanically Fastened FA = Fully Adhered BA = Ballasted

Peak Advantage® Guarantee Information

Systems
Approved for use in any JM Peak Advantage Guarantee System

Installation/Application



Mechanically Fastened



Hot Air Weld (for membrane)

- Do not install in direct contact with asphalt, coal tar pitch, or any petroleum-based product.
- Refer to JM PVC applicator guides or detail drawings for instructions.

Packaging and Dimensions

Sheet Size	4' x 10' (1.22 m x 3.05 m)
Nominal Thickness:	
Membrane	0.020" (0.51 mm)
Metal	0.024" (0.56 mm)
Total	0.044" (1.07 mm)
Sheets per Pallet	30 & 10 (white only)
Coverage per Pallet	1,200 ft ² (111.5 m ²) (gross)
Weight per Sheet	42 lb (19 kg)
Weight per Pallet	1,360 lb (617 kg) 650 lb (295 kg)

Storage

Storage Conditions	Store indoors, out of direct sunlight, and keep clean and dry prior to application. Store flat, not on end, protected from warping, bending or contamination.
--------------------	---