

### Features and Components


**Use:** Fabricated by the contractor into metal flashings and edge details. It is used to provide monolithic water-tight protection for both adhered and mechanically fastened roofing assemblies.

**Materials:** 20 mil (0.51 mm) UV-resistant PVC (polyvinyl chloride) with Elvaloy®\* KEE (ketone ethylene ester) membrane laminated to 24 gauge (0.6 mm) galvanized steel or stainless steel.

**Colors\*\*:** White; Grey; Sandstone; and Black

\*Elvaloy® KEE is a registered trademark of Dow.

\*\*Colors may be subject to availability, extended lead times and minimum order quantities.

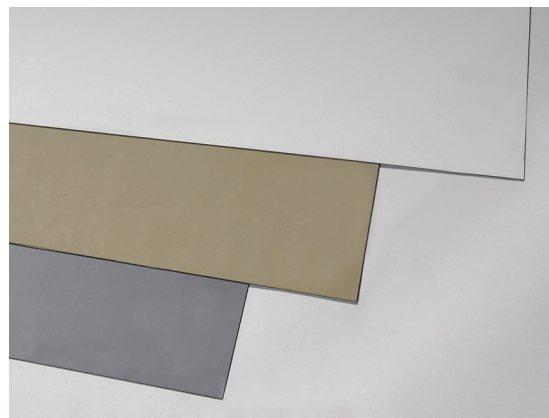

Component

**A**  
Accessory

Single Ply

Type

**FE**  
Flashing Edge

**System Compatibility** This product may be used as a component in the following systems. Please reference product application for specific installation methods and information.

|  |     |    |     |    |     |    |    |    |    |
|--|-----|----|-----|----|-----|----|----|----|----|
| Multi-Ply                              | BUR |    | APP |    | SBS |    |    |    |    |
|  | HA  | CA | CA  | HW | HA  | CA | HW | SA | MF |
| <i>Do not use in Multi-Ply systems</i> |     |    |     |    |     |    |    |    |    |

|  |     |    |     |    |      |    |    |
|--|-----|----|-----|----|------|----|----|
| Single Ply   | TPO |    | PVC |    | EPDM |    |    |
|  | MF  | FA | MF  | FA | MF   | FA | BA |
| <i>Compatible with the selected Single Ply systems above</i> |     |    |     |    |      |    |    |

**Key:** HA = Hot Applied CA = Cold Applied HW = Heat Weldable SA = Self Adhered MF = Mechanically Fastened FA = Fully Adhered BA = Ballasted

### Peak Advantage® Guarantee Information

|  |
|--|
| Systems  |
| Approved for use in any JM Peak Advantage Guarantee System |

### Installation/Application



Mechanically Fastened



Hot Air Weld (for membrane)

- Do not install in direct contact with asphalt, coal tar pitch, or any petroleum-based product.
- Refer to JM PVC applicator guides or detail drawings for instructions.

### Packaging and Dimensions

|                     |   |
|---------------------|---|
| Sheet Size          | 4' x 10' (1.22 m x 3.05 m)                            |
| Nominal Thickness:  |   |
| Membrane            | 0.020" (0.51 mm)                                      |
| Metal               | 0.024" (0.56 mm)                                      |
| Total               | 0.044" (1.07 mm)                                      |
| Sheets per Pallet*  | 30 & 10   |
| Coverage per Pallet | 1,200 ft <sup>2</sup> (111.5 m <sup>2</sup> ) (gross) |
| Weight per Sheet    | 42 lb (19 kg)   |
| Weight per Pallet   | 1,360 lb (617 kg) 650 lb (295 kg)                     |

\*Quantities per pallet may be subject to limitations depending on requested color.

Technical specifications as shown in this literature are intended to be used as general guidelines only. Please refer to the Safety Data Sheet and product label prior to using this product. The Safety Data Sheet is available by calling (800) 922-5922 or on the web at [www.jm.com/roofing](http://www.jm.com/roofing). The physical and chemical properties of the product listed herein represent typical, average values obtained in accordance with accepted test methods and are subject to normal manufacturing variations. They are supplied as a technical service and are subject to change without notice. Check with the regional sales representative nearest you for current information.

All Johns Manville products are sold subject to Johns Manville's standard Terms and Conditions, which includes a Limited Warranty and Limitation of Remedy. For a copy of the Johns Manville standard Terms and Conditions or for information on other Johns Manville roofing products and systems, visit [www.jm.com/terms-conditions](http://www.jm.com/terms-conditions).

### Storage

|                    |   |
|--------------------|---|
| Storage Conditions | Store indoors, out of direct sunlight, and keep clean and dry prior to application. Store flat, not on end, protected from warping, bending or contamination. |
|--------------------|---|