


Features and Components

Use: Provide a safe, stable and maintenance-free walkway for quick and easy access to rooftop equipment in high traffic areas.

Materials: 150 mil (3.81 mm) thick, textured, reinforced, UV-resistant PVC (polyvinyl chloride) with Elvaloy®* KEE (ketone ethylene ester).

Color: Safety Yellow

* Elvaloy is a registered trademark of E. I. du Pont de Nemours and Company or its affiliates.

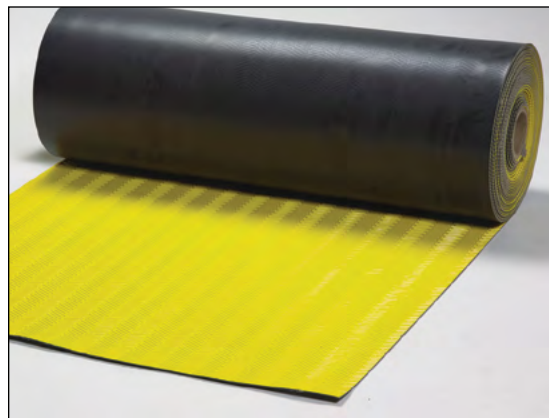

Component

A
Accessory

Single Ply

Type

PT
Protection

System Compatibility This product may be used as a component in the following systems. Please reference product application for specific installation methods and information.

Multi-Ply	BUR		APP		SBS				
	HA	CA	CA	HW	HA	CA	HW	SA	MF
Do not use in Multi-Ply systems									

Single Ply	TPO		PVC		EPDM		
	MF	FA	MF	FA	MF	FA	BA
Compatible with the selected Single Ply systems above							

Key: HA = Hot Applied CA = Cold Applied HW = Heat Weldable SA = Self Adhered MF = Mechanically Fastened FA = Fully Adhered BA = Ballasted

Peak Advantage® Guarantee Information

Systems
Approved for use in any JM Peak Advantage Guarantee System

Installation/Application



Hot Air Weld

When installing JM PVC Walkpads be sure to:

- Achieve full weld around perimeter of the material
- Install textured side up
- Minimize installing over seams and membrane splices whenever possible
- On mechanically fastened systems, avoid installing over the disc
- Refer to JM PVC applicator guides or detail drawings for instructions

Packaging and Dimensions

Roll Size (<i>width x length</i>)	36" x 60' (91.44 cm x 18.29 m)
Nominal Thickness	0.150" (3.81 mm)
Coverage per Roll (<i>gross</i>)	180 ft ² (16.72 m ²)
Weight per Roll	132 lb (59.9 kg)

Storage

Storage Conditions	Store indoors, out of direct sunlight, and keep clean and dry prior to application.
--------------------	---