

Features and Components


Use: Fabricated by the contractor into metal flashings and edge details. It is used to provide monolithic water-tight protection for both adhered and mechanically fastened roofing assemblies.

Materials: 20 mil (0.51 mm) UV-resistant PVC (polyvinyl chloride) with Elvaloy®* KEE (ketone ethylene ester) membrane laminated to .040 Aluminum.

Colors:** White; Grey; Sandstone; and Black

*Elvaloy® KEE is a registered trademark of Dow.

**Colors may be subject to availability, extended lead times and minimum order quantities.

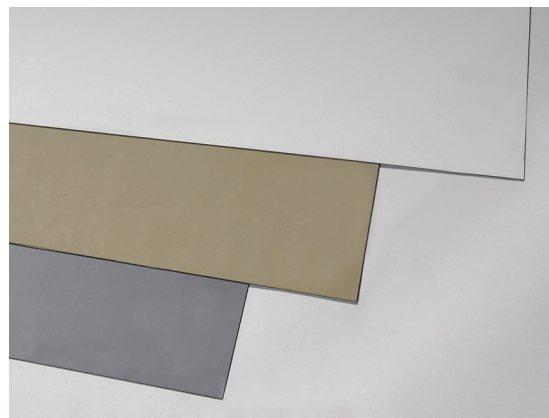

Component

A
Accessory

Single Ply

Type

FE
Flashing Edge

System Compatibility This product may be used as a component in the following systems. Please reference product application for specific installation methods and information.

Multi-Ply	BUR		APP		SBS				
	HA	CA	CA	HW	HA	CA	HW	SA	MF
<i>Do not use in Multi-Ply systems</i>									

Single Ply	TPO		PVC		EPDM		
	MF	FA	MF	FA	MF	FA	BA
<i>Compatible with the selected Single Ply systems above</i>							

Key: HA = Hot Applied CA = Cold Applied HW = Heat Weldable SA = Self Adhered MF = Mechanically Fastened FA = Fully Adhered BA = Ballasted

Peak Advantage® Guarantee Information

Systems
Approved for use in any JM Peak Advantage Guarantee System

Installation/Application



Mechanically Fastened



Hot Air Weld (for membrane)

- Do not install in direct contact with asphalt, coal tar pitch, or any petroleum-based product.
- Refer to JM PVC applicator guides or detail drawings for instructions.

Packaging and Dimensions

Sheet Size	4' x 10' (1.22 m x 3.05 m)
Nominal Thickness:	
Membrane	0.020" (0.51 mm)
Metal	0.040" (1.16 mm)
Total	0.060" (1.67 mm)
Sheets per Pallet*	30 & 10
Coverage per Pallet	1,200 ft ² (111.5 m ²) (gross)
Weight per Sheet	28 lb (13 kg)
Weight per Pallet	1070 lb (485 kg) 510 lb (231 kg)

*Quantities per pallet may be subject to limitations depending on requested color.

Technical specifications as shown in this literature are intended to be used as general guidelines only. Please refer to the Safety Data Sheet and product label prior to using this product. The Safety Data Sheet is available by calling (800) 922-5922 or on the web at www.jm.com/roofing. The physical and chemical properties of the product listed herein represent typical, average values obtained in accordance with accepted test methods and are subject to normal manufacturing variations. They are supplied as a technical service and are subject to change without notice. Check with the regional sales representative nearest you for current information.

All Johns Manville products are sold subject to Johns Manville's standard Terms and Conditions, which includes a Limited Warranty and Limitation of Remedy. For a copy of the Johns Manville standard Terms and Conditions or for information on other Johns Manville roofing products and systems, visit www.jm.com/terms-conditions.

Storage

Storage Conditions	Store indoors, out of direct sunlight, and keep clean and dry prior to application. Store flat, not on end, protected from warping, bending or contamination.
--------------------	---