


## Features and Components

**Use:** Provides a safe, stable and maintenance-free walkway for quick and easy access to rooftop equipment in high traffic areas. The safety yellow stripe serves to provide a warning to areas of caution or hazards on the rooftop.

**Material:** 156 mil (3.97 mm) thick, non-reinforced, textured TPO (thermoplastic polyolefin).

**Color:** White and Yellow

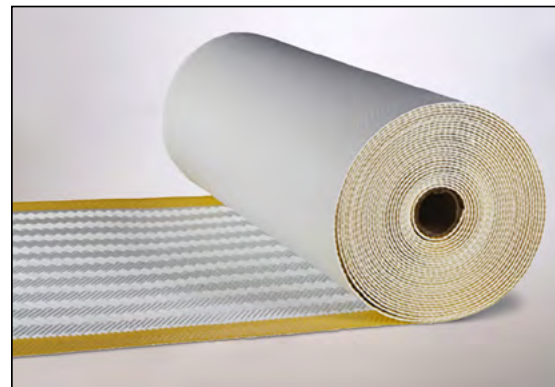

**Component**

**A**  
Accessory

Single Ply

**Type**

**PT**  
Protection

**System Compatibility** This product may be used as a component in the following systems. Please reference product application for specific installation methods and information.

Multi-Ply	BUR		APP		SBS			
	HA	CA	CA	HW	HA	CA	HW	SA
<b>Do not use in Multi-Ply systems</b>								

Single Ply	TPO		PVC		EPDM		
	MF	FA	MF	FA	MF	FA	BA
<b>Compatible with the selected Single Ply systems above</b>							

**Key:** HA = Hot Applied CA = Cold Applied HW = Heat Weldable SA = Self Adhered MF = Mechanically Fastened FA = Fully Adhered BA = Ballasted

## Energy and Environment

LEED®	Recycled Content: Post-consumer: 0% Post-industrial: 0%
-------	---


## Physical Properties

Property	JM TPO Walkpads
Weight per Unit	0.60 lb/ft <sup>2</sup> (2.93 kg/m <sup>2</sup> )

## Peak Advantage® Guarantee Information

Systems
Approved for use in any JM Peak Advantage Guarantee System

## Installation/Application



When installing JM TPO Safety Walkpads be sure to:

- Achieve full weld around perimeter of the material.
- Install textured side up.
- Minimize installing over seams and membrane splices whenever possible.
- On mechanically fastened systems, avoid installing over the fastener and plate.
- Refer to JM TPO applicator guides or detail drawings for instructions.

## Packaging and Dimensions

Roll Size	30' x 50' (76.2 cm x 15.24 m)
Thickness	0.156" (3.97 mm)
Rolls per Container	1
Coverage/Container	125 ft <sup>2</sup> (11.61 m <sup>2</sup> ) (gross)
Weight per Roll	75 lb (34 kg)
Rolls per Pallet	16

## Storage

Storage Conditions	Store indoors, out of direct sunlight, and keep clean and dry prior to application.
--------------------	---