


Features and Components

Use: Fabricated by the contractor into metal flashings and edge details. It is used to provide monolithic watertight protection for both adhered and mechanically fastened TPO roofing systems.

Materials: Non-reinforced JM TPO (thermoplastic polyolefin) membrane laminated to galvanized steel.

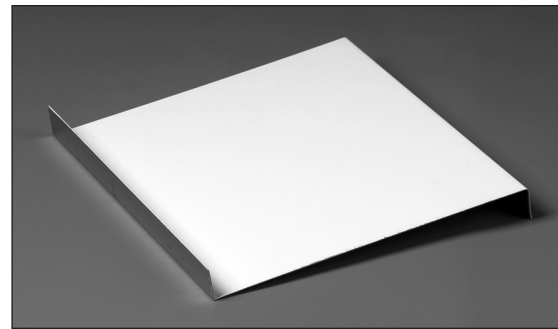

Component

A
Accessory

Single Ply

Type

FE
Flashing Edge

Colors



System Compatibility This product may be used as a component in the following systems. Please reference product application for specific installation methods and information.

Multi-Ply	BUR		APP		SBS			
	HA	CA	CA	HW	HA	CA	HW	SA
Do not use in Multi-Ply systems								

Single Ply	TPO		PVC		EPDM		
	MF	FA	MF	FA	MF	FA	BA
Compatible with the selected Single Ply systems above							

Key: HA = Hot Applied CA = Cold Applied HW = Heat Weldable SA = Self Adhered MF = Mechanically Fastened FA = Fully Adhered BA = Ballasted

Physical Properties

Property	JM TPO-Coated Metal
Weight per Unit	1.12 lb/ft ² (5.47 kg/m ²)

Peak Advantage® Guarantee Information

Systems
Approved for use in any JM Peak Advantage Guarantee System

Installation/Application



Mechanically Fastened



Hot Air Weld (for membrane)

- Do not install JM TPO Coated Metal in direct contact with asphalt.
- Refer to JM TPO applicator guides or detail drawings for instructions.

Packaging and Dimensions

Sheet Size	4' x 10' (1.22 m x 3.05 m)
Nominal Thickness:	
Membrane	0.030" (0.76 mm)
Metal	0.022" (0.56 mm)
Total	0.052" (1.32 mm)
Sheets per Pallet	30 & 10 (white only)
Coverage per Pallet	1,200 ft ² (111.5 m ²) (gross)
Weight per Sheet	45 lb (20.4 kg)
Weight per Pallet	1,360 lb (617 kg) 650 lb (295 kg)

Storage

Storage Conditions	Store indoors, flat, out of direct sunlight, and keep clean and dry prior to installation.
--------------------	--------------------------------------------------------------------------------------------