


Features and Components

Ceramic-Coated Roofing Granules: Specifically engineered for optimal embedment in the SBS-blend sheet. The ceramic coating promotes excellent long-term adhesion.

High-Quality SBS Rubber and Asphalt Blend: Provides full recovery properties after 100% elongation and lends elasticity and flexibility to the sheet.

Polyester-Reinforcement Mat: Polyester mat with bi-directional glass-scrim reinforcement offers robust tear strength and puncture resistance, allowing for high wind performance and an excellent hail rating. The sheet also exhibits strong dimensional stability and enhanced elongation.

Self Adhering Modified Bitumen: The product's self-adhering feature with an easy-to-peel plastic film on the bottom of the sheet allows for installation without the need of hot asphalt or heat-welding.

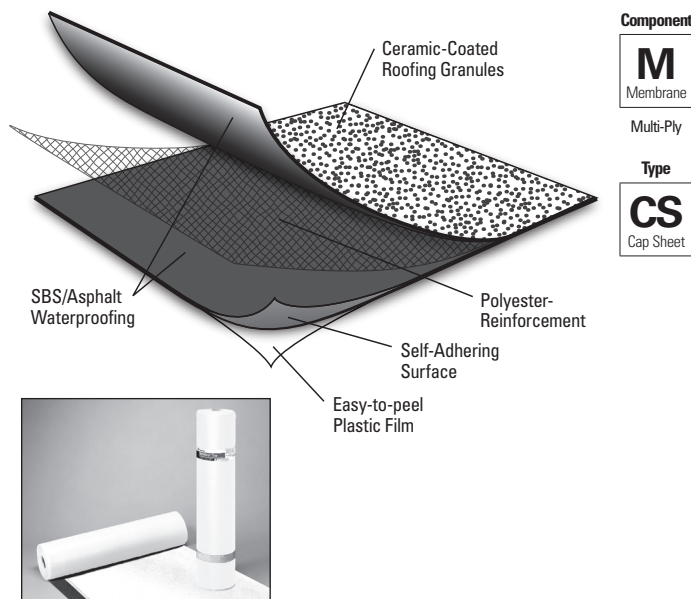

System Compatibility This product may be used as a component in the following systems. Please reference product application for specific installation methods and information.

Multi-Ply	BUR		APP		SBS				
	HA	CA	CA	HW	HA	CA	HW	SA	MF
<i>Compatible with the selected Multi-Ply systems above</i>									

Single Ply	TPO				PVC			EPDM		
	MF	AD	SA	IW	MF	AD	IW	MF	AD	BA
<i>Do not use in Single Ply systems</i>										

Key: HA = Hot Applied CA = Cold Applied HW = Heat Weldable SA = Self Adhered MF = Mechanically Fastened IW = Induction Weld BA = Ballasted AD = Adhered

Energy and the Environment

Test	Initial	3-Year Aged
Reflectivity* (ASTM C 1549)	0.26	0.27
Emissivity* (ASTM C 1371)	0.87	0.84
Solar Reflectance Index* (SRI) - E 1980	25	25
Pre-Consumer Recycled Content	0%	
Post-Consumer Recycled Content	0%	

*Standard White Granule only

Peak Advantage® Guarantee Information

Systems	Guarantee Term
When used in most 2-5 ply JM SBS systems.*	Up to 30 years

*Contact JM Technical Services for specific system requirements for guarantee lengths.

Installation/Application



Self-Adhered

- Apply in dry weather and when the roll is at least 60°F (16°C) at the time of application
- Refer to JM SBS modified bitumen specifications and detail drawings for application and slope information

JM Recommended Substrates:

- Primed metal surfaces
- Unsanded asphalt
- OSB/plywood products without wax coating
- ENRGY 3®
- ENRGY 3® Foil Faced
- Primed concrete

Packaging and Dimensions

Roll Coverage*	95.8 ft ² (8.9 m ²)
Roll Length	32' 10" (10.01 m)
Roll Width	39 3/8" (1 m)
Rolls per Pallet	20
Roll Weight	105 lb (47.63 kg)

*Assumes a 4" side lap.

Storage

Shelf Life	12 months from manufacture date
------------	---------------------------------

Refer to the Safe Use Instructions and product label prior to using this product. The Safe Use Instructions are available by calling (800) 922-5922 or on the Web at www.jm.com/roofing.

Tested Physical Properties

Physical Properties		ASTM Test Method	DynaGrip Base PR SA/SA	
			MD*	XMD**
Strength	Peak Load at 73.4°F (23°C)	D 5147	85 lbf/in (14.9 kN/m)	55 lbf/in (10.7 kN/m)
	Tear Strength at 73.4°F (23°C)	D 5147	160 lbf (711 N)	95 lbf (422 N)
Longevity	Thickness	D 5147	160 mils (4.00mm)	
	Elongation at Peak Load at 73.4°F (23°C)	D 5147	50%	65%
	Ultimate Elongation at 73.4°F (23°C)	D 5147	65%	90%
	Low Temp. Flexibility	D 5147	-15°F (-26°C)	
	Compound Stability	D 5147	221°F (105°C)	
Installation	Dimensional Stability	D 5147	0.35%	0.40%
	Net Mass per Unit Area	D 146	100 lb/100ft ² (4882 g/m ²)	
	Roll Weight	D 146	105 lb (47.63 kg)	

*MD = Machine Direction

**XMD = Cross-Machine Direction

Note: Material tested in accordance with ASTM D 5147 Standard Test Methods for Sampling and Testing Modified Bituminous Sheet Materials.