

Meets the requirements of ASTM D 6164, Type I, Grade G


### Features and Components

DynaLastic 180 FR CR is used as a polyester-reinforced cool roof cap or flashing sheet in a variety of multi-ply roofing systems.

**Ceramic-Coated Roofing Granules With Factory-Applied Cool Roof Coating:** The cool roof technology combines the proven UV protection of ceramic-coated granules with a highly reflective coating, offering long-term performance and potential energy savings.

**High-Quality SBS Rubber and Asphalt Blend:** Lends elasticity and flexibility to the sheet. The elongation and recovery properties allow the product to easily accommodate the continual expansion and contraction experienced on all roofs. The FR blend contains additional fire-retardant additives.

**Polyester-Reinforced Mat:** Polyester mat with bidirectional glass-scrim reinforcement offers robust tear strength and puncture resistance, allowing for high wind performance and an excellent hail rating. The sheet also exhibits strong dimensional stability and enhanced elongation.

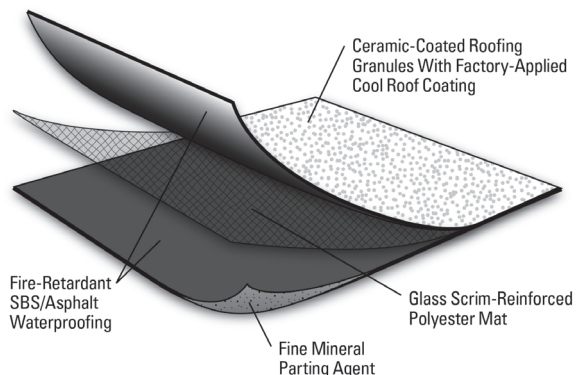

<b>Component</b>
<b>M</b> Membrane
Multi-Ply
<b>Type</b>
<b>CS</b> Cap Sheet
<b>FL</b> Flashing



Color: Bright white only

**System Compatibility** This product may be used as a component in the following systems. Please reference product application for specific installation methods and information.

Multi-Ply	BUR			APP			SBS			
	HA	CA	HW	HA	CA	HW	SA	MF		
Compatible with the selected Multi-Ply systems above										

Single Ply	TPO				PVC			EPDM		
	MF	AD	SA	IW	MF	AD	IW	MF	AD	BA
Do not use in Single Ply systems										

Key: HA = Hot Applied CA = Cold Applied HW = Heat Weldable SA = Self Adhered MF = Mechanically Fastened IW = Induction Weld BA = Ballasted AD = Adhered

### Energy and the Environment

CRRC®	Test	Initial	3-Year Aged**
		Reflectivity (ASTM C 1549)	0.83
	Emissivity (ASTM C 1371)	0.91	0.88
Rated Product ID: 0662-0007b Licensed Manufacturer ID: 0662 Classification: Production Line			
LEED®	Solar Reflectance Index (SRI) - E 1980	104	95
	Recycled Content	0%	

\* Cool Roof Rating Council ratings are determined for a fixed set of conditions, and may not be appropriate for determining seasonal energy performance. The actual effect of solar reflectance and thermal emittance on building construction may vary.

Manufacturer of product stipulates that these ratings were determined in accordance with the applicable Cool Roof Rating normal procedures.

\*\* Tested in accordance with Rapid Ratings D7897.

CAN BE USED TO COMPLY WITH 2016 TITLE 24 PART 6 COOL ROOF REQUIREMENTS

### Peak Advantage® Guarantee Information

Systems	Guarantee Term
When used in most 2-5 ply JM SBS systems.*	Up to 30 years

\*Contact JM Technical Services for specific system requirements or guarantee terms.

### Codes and Approvals



### Product Application



- May be installed in Type IV asphalt or in an approved JM adhesive
- Laps may be installed using heat-welding techniques
- Refer to JM SBS modified bitumen specifications and detail drawings for application and slope information

### Packaging and Dimensions

Roll Coverage*	95.8 ft <sup>2</sup> (8.9 m <sup>2</sup> )
Roll Length	32' 10" (10.01 m)
Roll Width	39 3/8" (1 m)
Roll Weight	106 lb (48.1 kg)
Rolls per Pallet	20
Pallet Weight	2,250 lb (1,021 kg)
Pallets per Truck**	20

\*Assumes a 4" side lap \*\*Assumes 48' flatbed truck.

Refer to the Safe Use Instructions and product label prior to using this product. The Safe Use Instructions are available by calling (800) 922-5922 or on the Web at [www.jm.com/roofing](http://www.jm.com/roofing).

**Meets the requirements of ASTM D 6164, Type I, Grade G**

**Tested Physical Properties**

Physical Properties		ASTM Test Method	Standard for ASTM D 6164, Type I, Grade G (Min.)	DynaLastic 180 FR CR	
				MD*	XMD**
Strength	Tensile Tear	D 5147	55 lbf (245 N)	125 lbf (556 N)	90 lbf (400 N)
	Peak Load at 0°F (-18°C)	D 5147	70 lbf/in (12 kN/m)	110 lbf/in (19.3 kN/m)	90 lbf/in (15.8 kN/m)
	Peak Load at 73.4°F (23°C)	D 5147	50 lbf/in (8.8 kN/m)	80 lbf/in (14.0 kN/m)	60 lbf/in (10.5 kN/m)
Longevity	Low Temp. Flexibility	Unconditioned	D 5147	0°F (-18°C)	-20°F (-29°C)
		90-Day Heat Conditioned	D 5147	0°F (-18°C)	-20°F (-29°C)
	Compound Stability	D 5147	215°F (102°C)	250°F (121°C)	
	Granule Loss	D 4977	2 g (0.07 oz)	0.7 g (0.02 oz)	
	Thickness	D 5147	130 mil (3.3 mm)	157 mil (4.0 mm)	
	Selvage Edge Thickness	D 5147	N/A	119 mil (3.0 mm)	
	Elongation at Peak Load at 0°F (-18°C)	D 5147	20%	35%	40%
	Elongation at Peak Load at 73.4°F (23°C)	D 5147	35%	55%	60%
	Ultimate Elongation at 73.4°F (23°C)	D 5147	38%	70%	80%
Aged Performance	90-Day Heat-Conditioned Peak Load at 0°F (-18°C)	D 5147	70 lbf/in (12 kN/m)	110 lbf/in (19.3 kN/m)	90 lbf/in (15.8 kN/m)
	90-Day Heat-Conditioned Elongation at Peak Load at 0°F (-18°C)	D 5147	20%	25%	25%
	90-Day Heat-Conditioned Peak Load at 73.4°F (23°C)	D 5147	50 lbf/in (8.8 kN/m)	85 lbf/in (14.9 kN/m)	65 lbf/in (11.4 kN/m)
	90-Day Heat-Conditioned Elongation at Peak Load at 73.4°F (23°C)	D 5147	35%	35%	45%
	90-Day Heat-Conditioned Ultimate Elongation at 73.4°F (23°C)	D 5147	38%	45%	45%
Installation	Dimensional Stability	D 5147	1.0%	0.2%	0.1%
	Net Mass per Unit Area	D 146	75 lb/100 ft² (34 kg/9.29 m²)	98 lb/100 ft² (44 kg/9.29 m²)	
	Roll Weight	D 146	N/A	106 lb (46 kg)	

\*MD = Machine Direction

\*\*XMD = Cross-Machine Direction

Note: All data represents tested values.

**Supplemental Testing**

Physical Properties	ASTM Test Method	Standard for ASTM D 6164, Type I, Grade G (Min.)	DynaLastic 180 FR CR Result
Cyclic Joint Displacement	D 5849	N/A	Pass at 500 cycles*

\*When adhered to DynaLastic 180 S in hot asphalt.