

Features and Components

The Presto Lock Fascia System is an economical snap-on fascia system designed for use with single ply, built-up and modified bitumen roofing systems. The fascia system consists of a galvanized Water Dam and a Cover Plate of either galvanized or aluminum. Concealed cover plates complete the system.

Water Dam: 10' (3.05 m) sections of 24 gauge (0.61 mm) galvanized steel.



Cover Plate: 10' (3.05 m) sections snapped into place over the water dam. Available in two sizes and materials, see Sizes/Dimensions/Finishes table below.

Extender Plate: For use where additional metal coverage is required. Fits behind the bottom edge of the fascia system and extends downward the required distance from 4" to 14" (10.16 cm to 35.56 cm) in 1" (2.54 cm) increments. Concealed extender plates are placed behind each joint.

Finishes: Steel and aluminum available in a number of standard Kynar®* 500 colors, aluminum also available in mill and anodized finishes. Custom colors available upon request.

Accessories: Inside and outside corners, fascia sumps, and scuppers are available made of the same material and color as the cover plate.

*Kynar® is a registered trademark of Arkema, Inc.

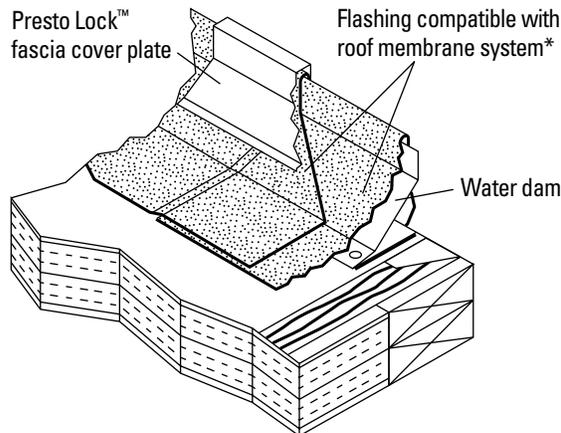

Dynaflex™ and coated GlasTite™ Flexible are approved flashing materials for built-up and modified bitumen systems. Use single ply membrane flashing with all single ply systems.

* Mineral-surfaced flashings cut on bias as shown. All others may be square cut.



System Compatibility *This product may be used as a component in the following systems. Please reference product application for specific installation methods and information.*

Multi-Ply	BUR		APP		SBS			
	HA	CA	CA	HW	HA	CA	HW	SA
Compatible with all Multi-Ply systems								

Single Ply	TPO		PVC		EPDM		
	MF	FA	MF	FA	MF	FA	BA
Compatible with all Single Ply systems							

Key: HA = Hot Applied CA = Cold Applied HW = Heat Weldable SA = Self Adhered MF = Mechanically Fastened FA = Fully Adhered BA = Ballasted

Energy and the Environment

Pre-Consumer Recycled Content	Varies by cover material
Post-Consumer Recycled Content	Varies by cover material

Peak Advantage® Guarantee Information

Covered under the JM Peak Advantage Guarantee when installed in a JM approved roofing system.

Codes and Approvals



- FM Global® 1-90 (With use of 0.050" [1.27 mm] aluminum cover)

Refer to the Safety Data Sheet and product label prior to using this product. The Safety Data Sheet is available by calling (800) 922-5922 or on the Web at www.jm.com/roofing.

Installation/Application

Refer to JM applicator guides or detail drawings for instructions.

Sizes/Dimensions/Finishes*

Water Dam	10' (3.05 m) sections, 24 gauge (0.61 mm) galvanized
Cover Plate	10' (3.05 m) sections, standard face sizes are 7" (17.78 cm) and 9" (22.86 cm), available in any combination of the following gauges and finishes: Aluminum gauges: 0.040" (1.02 mm), 0.050" (1.27 mm), 0.063" (1.6 mm) Galvanized gauges: 22 gauge (0.76 mm), 24 gauge (0.61 mm) Aluminum finishes: Mill and Kynar 500, Galvanized finishes: Kynar 500,
Concealed Extender Plate	5" (12.7 cm) wide, with metal and finish to match cover
Extender Plates	4" to 14" (10.16 cm to 35.56 cm) lengths
Producing Location	Lewiston, ME

* Special sizes, shapes, metals, and curved fascias are available upon request