

Features and Components

A cost-effective snap-on coping system designed for use with single ply, built-up and modified bitumen roofing systems. The system consists of galvanized steel anchor clips and aluminum or galvanized coping covers in a variety of thicknesses and colors.

Anchor Clips: 12" wide Galvanized steel base with stainless steel spring clip designed to keep upward pressure on the coping cover. Pre-punched for proper fastener location.

Coping Cover: Available in 12 ft (3.7 m) lengths of either aluminum or galvanized steel, lengths and gauges listed below.


Concealed Splice Plate: 8" (20.3 cm) wide plate, with metal and finish to match cover, and dual non-curing isocryl butyl sealant strips to allow for thermal movement and seals joints.

Finishes: Steel and aluminum available in a number of standard Kynar®* 500 colors, aluminum also available in mill and anodized finishes. Custom colors available upon request.


Accessories: Factory-fabricated miters, end caps, and tees are available with "quicklock" or welded seams.

Custom Capabilities: Quicklock and welded radius coping available along with other specially fabricated coping products to meet the needs of the project.

*Kynar® is a registered trademark of Arkema, Inc.

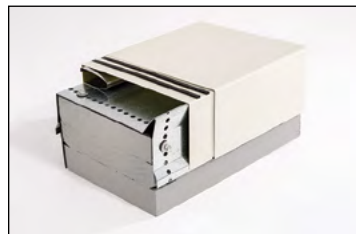

Shown with cover and splice plate

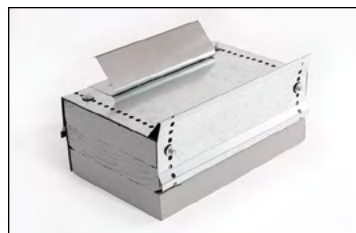

Shown with anchor clip only

Component

S
Specialty

Multi-Ply
Single Ply

Type

EM
Edge Metal

System Compatibility This product may be used as a component in the following systems. Please reference product application for specific installation methods and information.

Multi-Ply	BUR		APP		SBS			
	HA	CA	CA	HW	HA	CA	HW	SA
Compatible with all Multi-Ply systems								

Single Ply	TPO		PVC		EPDM		
	MF	FA	MF	FA	MF	FA	BA
Compatible with all Single Ply systems							

Key: HA = Hot Applied CA = Cold Applied HW = Heat Weldable SA = Self Adhered MF = Mechanically Fastened FA = Fully Adhered BA = Ballasted

Energy and the Environment

Pre-Consumer Recycled Content	Varies by cover material
Post-Consumer Recycled Content	Varies by cover material

Peak Advantage® Guarantee Information

Covered under the JM Peak Advantage Guarantee when installed in a JM approved roofing system.

Codes and Approvals



- FM Global® up to 1-90 Approved
- Meets criteria for ANSI-SPRI ES-1 Wind Design "Standard for Edge Systems Used with Low-Slope Roofing Systems."

Refer to the Safety Data Sheet and product label prior to using this product. The Safety Data Sheet is available by calling (800) 922-5922 or on the Web at www.jm.com/roofing.

Installation/Application

Refer to JM applicator guides or detail drawings for instructions.

Sizes*/Dimensions/Finishes

Anchor Clip Base	12" (30.48 cm) wide, 20 gauge (0.91 mm) base
Coping Cover	12' (3.7 m) lengths, available in any combination of the following gauges and finishes: Aluminum gauges: 0.040" (1.02 mm), 0.050" (1.27 mm), 0.063" (1.6 mm) Galvanized gauges: 24 gauge (0.61 mm) Aluminum finishes: Mill, Kynar 500, Clear or Colored Anodized Galvanized finishes: Mill and Kynar 500
Concealed Splice Plate	8" (20.32 cm) wide, with metal and finish to match cover
Coping Extenders	4" to 14" (10.16 cm to 35.56 cm) lengths
Producing Location	Waukesha, WI

* Special sizes, shapes, metals, and arched and radiused coping available upon request. Custom fabrication to fit exact job requirement. Available in both tapered and flat designs. Tapered (shown above) is recommended.