

Features and Components

The U-Flow®* Screwdriver is an accessory product used in the installation of RetroDrain®* products with the U-Flow Seal. Specifically for tightening the special recessed head screws on the U-Flow compression seals. The extra long shaft of the screwdriver ensures ease of reach when tightening the connection screws on all U-Flow retrofit products. The screwdriver comes complete with a loss prevention bar.

Tip: #2 Robertson square tip

Shaft: 12.5" (31.75 cm) shaft length

* RetroDrain® and U-Flow® are registered trademarks of OMG Roofing Products.



Component


S
Specialty

Multi-Ply
Single Ply

Type

DV
Drains/Vents

Tightening Sequence

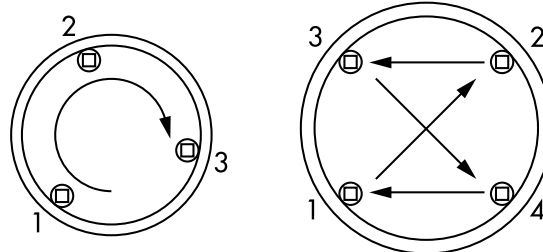

System Compatibility This product may be used as a component in the following systems. Please reference product application for specific installation methods and information.

Multi-Ply	BUR		APP		SBS			
	HA	CA	CA	HW	HA	CA	HW	SA
<i>Compatible with all Multi-Ply systems</i>								

Single Ply	TPO		PVC		EPDM		
	MF	FA	MF	FA	MF	FA	BA
<i>Compatible with all Single Ply systems</i>							

Key: HA = Hot Applied CA = Cold Applied HW = Heat Weldable SA = Self Adhered MF = Mechanically Fastened FA = Fully Adhered BA = Ballasted

Installation/Application

- Simply insert the narrow end of the U-Flow Seal into the bottom of the drain stem.
- Using the U-Flow Screwdriver, tighten the seal's screws, accessible through top of drain, until seal expands and locks to the drain stem.
- Place the drain with attached seal inside the existing drain pipe.
- Tighten the seal screws in sequence, in order to provide uniform compression of the seal's compressing ring (the lowest part on the seal). Screws should be tightened with a few turns each, one by one. This procedure should be repeated until screws are snug and no vertical movement of the drain is possible. U-Flow 3" (7.62 cm) and 4" (10.16 cm) seals have three (3) screws each, while U-Flow 5" (12.70 cm) and 6" (15.24 cm) seals have four (4) screws each. The order of tightening is shown in the drawings above.

Packaging and Dimensions

Shaft Length	12.5" (31.75 cm)
Items per Package	1
Weight per package	1 lb
Producing Location	Lewiston, ME

Refer to the Safety Data Sheet and product label prior to using this product. The Safety Data Sheet is available by calling (800) 922-5922 or on the Web at www.jm.com/roofing.