


Expand-O-Flash® Sectional Reference

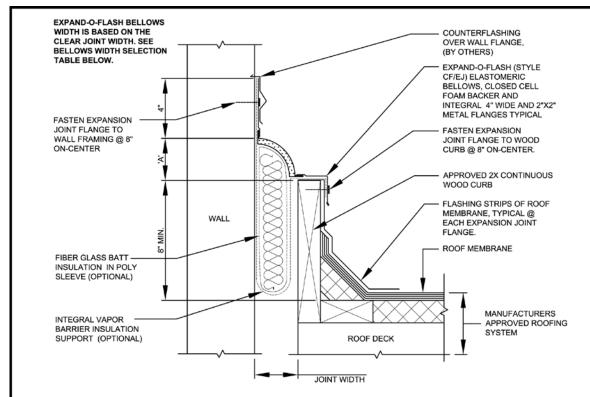

BELLOWS MOUNTING HEIGHT 'A'	
BELLOWS SIZE (IN)	MOUNTING HEIGHT 'A' (IN)
4"	2½"
6"	3¾"
8"	5½"
10"	6¾"
12"	7½"

BELLOWS WIDTH SELECTION TABLE	
JOINT WIDTH RANGES	BELLOWS SIZE (IN)
1" - 2"	4"
2½" - 3"	6"
3½" - 4"	8"
4½" - 5"	10"
5½" - 6"	12"

- CHART NOTES:

 BELLOWS WIDTH SELECTION TABLE IS BASED ON 50% JOINT MOVEMENT. CONTACT EXPAND-O-FLASH TECHNICAL SERVICE AT 800-445-1500 FOR BELLOWS SELECTION REQUIRING GREATER THAN 50% JOINT MOVEMENT.
- BELLOWS SIZES LISTED ARE JOHNS MANVILLE STANDARD SIZES.
- LARGER BELLOWS SIZES ARE AVAILABLE AS A CUSTOM ORDER.

NOTES:

- FOR ADDITIONAL APPLICATION INFORMATION OR TECHNICAL SERVICE PLEASE CONTACT OUR EXPAND-O-FLASH
- THIS JOHNS MANVILLE PRODUCT CAN BE INCLUDED IN THE JM PEAK ADVANTAGE GUARANTEE. PLEASE CONTACT A JM TECHNICAL SERVICES SPECIALIST AT 800-922-5922 FOR SPECIFIC ROOFING AND FLASHING REQUIREMENTS.
- THIS DRAWING IS FOR REPRESENTATION PURPOSES ONLY. CONSULT EXPAND-O-FLASH TECHNICAL SERVICE FOR DEVIATIONS FROM THE ABOVE DETAIL
- FACTORY FABRICATED TRANSITIONS, MITERS AND INTERSECTIONS ARE AVAILABLE, PLEASE CONTACT EXPAND-O-FLASH TECHNICAL SERVICE FOR ADDITIONAL INFORMATION.
- CONTACT JM EXPAND-O-FLASH TECHNICAL SERVICE FOR INSTALLATION INSTRUCTIONS.

EXPAND-O-FLASH; CURB TO WALL (STYLE CF/EJ) DRAWING NO. SCALE NTS **CFEJ-CW** CAD FILE: STANDARD EOF CUT SHEETS.DWG

Note: For the most current information on general guidelines, please refer to the System Considerations tab under Systems Introduction & Selection on the JM Roofing Web site. For specifications, flashing details and general installation information please refer to the System Application tab.