


## JM AUTOMOTIVE/EV PLANT HYBRID ASSEMBLY PLATES

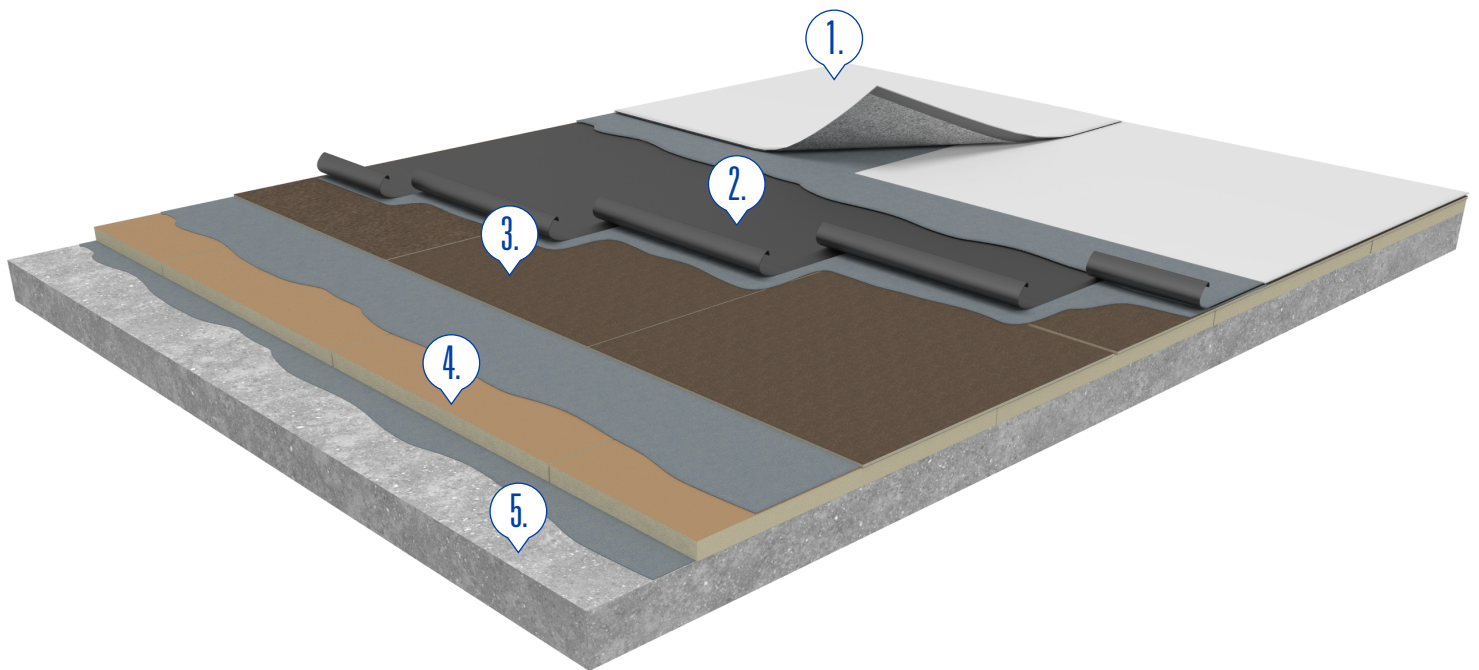

1. JM TPO FB – 150 or 175 mil adhered in asphalt  
or  
JM PVC FB - 60 or 80 mil adhered in asphalt.
2. One or more layers of DynaBase, DynasBase<sup>®</sup> PR, Dynalastic<sup>®</sup> 180S, or DynaLastic<sup>®</sup> 250S adhered in asphalt.
3. RetroPlus<sup>™</sup> Roof Board adhered in asphalt.
4. ENRGY 3<sup>®</sup> Insulation asphalt applied.
5. Primed Concrete Deck.

Learn more about our comprehensive portfolio of products and systems at [jm.com/roofing](http://jm.com/roofing)