


NOTES:

1. REFER TO JOHNS MANVILLE WEBSITE (www.jm.com) FOR MOST UP-TO-DATE INFORMATION.
2. PLEASE SEE SINGLE PLY FLASHING SPECIFICATIONS FOR A FULL DESCRIPTION OF INSTALLATION INSTRUCTIONS AND REQUIREMENTS WHICH ARE CONSIDERED A PART OF THIS DETAIL.
3. ANY CARPENTRY OR METAL WORK SHOULD BE DESIGNED AND CONSTRUCTED IN ACCORDANCE WITH LOCAL CODE REQUIREMENTS AND/OR PROJECT SPECIFICATIONS. THESE COMPONENTS SHOULD BE REVIEWED AND APPROVED BY A LICENSED DESIGN PROFESSIONAL. CONTACT JM TECHNICAL FOR METAL OPTIONS TO BE INCLUDED WITHIN THE JM NDL GUARANTEE.
4. OVERLAP ADJOINING JM EPDM MEMBRANES AT ALL LOCATIONS A MINIMUM OF 3" (76 mm) AND UP TO 6" (152 mm) DEPENDING ON SPECIFICATION/GUARANTEE. JM EPDM SEAM TAPE IS USED TO SEAM JM EPDM MEMBRANE LAPS.
5. JM EPDM TAPE PRIMER MUST BE APPLIED ON ALL SURFACES COMING INTO CONTACT WITH JM EPDM PEEL & STICK FLASHING.
 - JM EPDM (BLACK) MEMBRANE REQUIRES: JM EPDM TAPE PRIMER OR JM SINGLE PLY MEMBRANE PRIMER (LOW VOC).
 - JM WHITE EPDM MEMBRANE REQUIRES: JM TPO MEMBRANE PRIMER OR JM SINGLE PLY MEMBRANE PRIMER (LOW VOC).

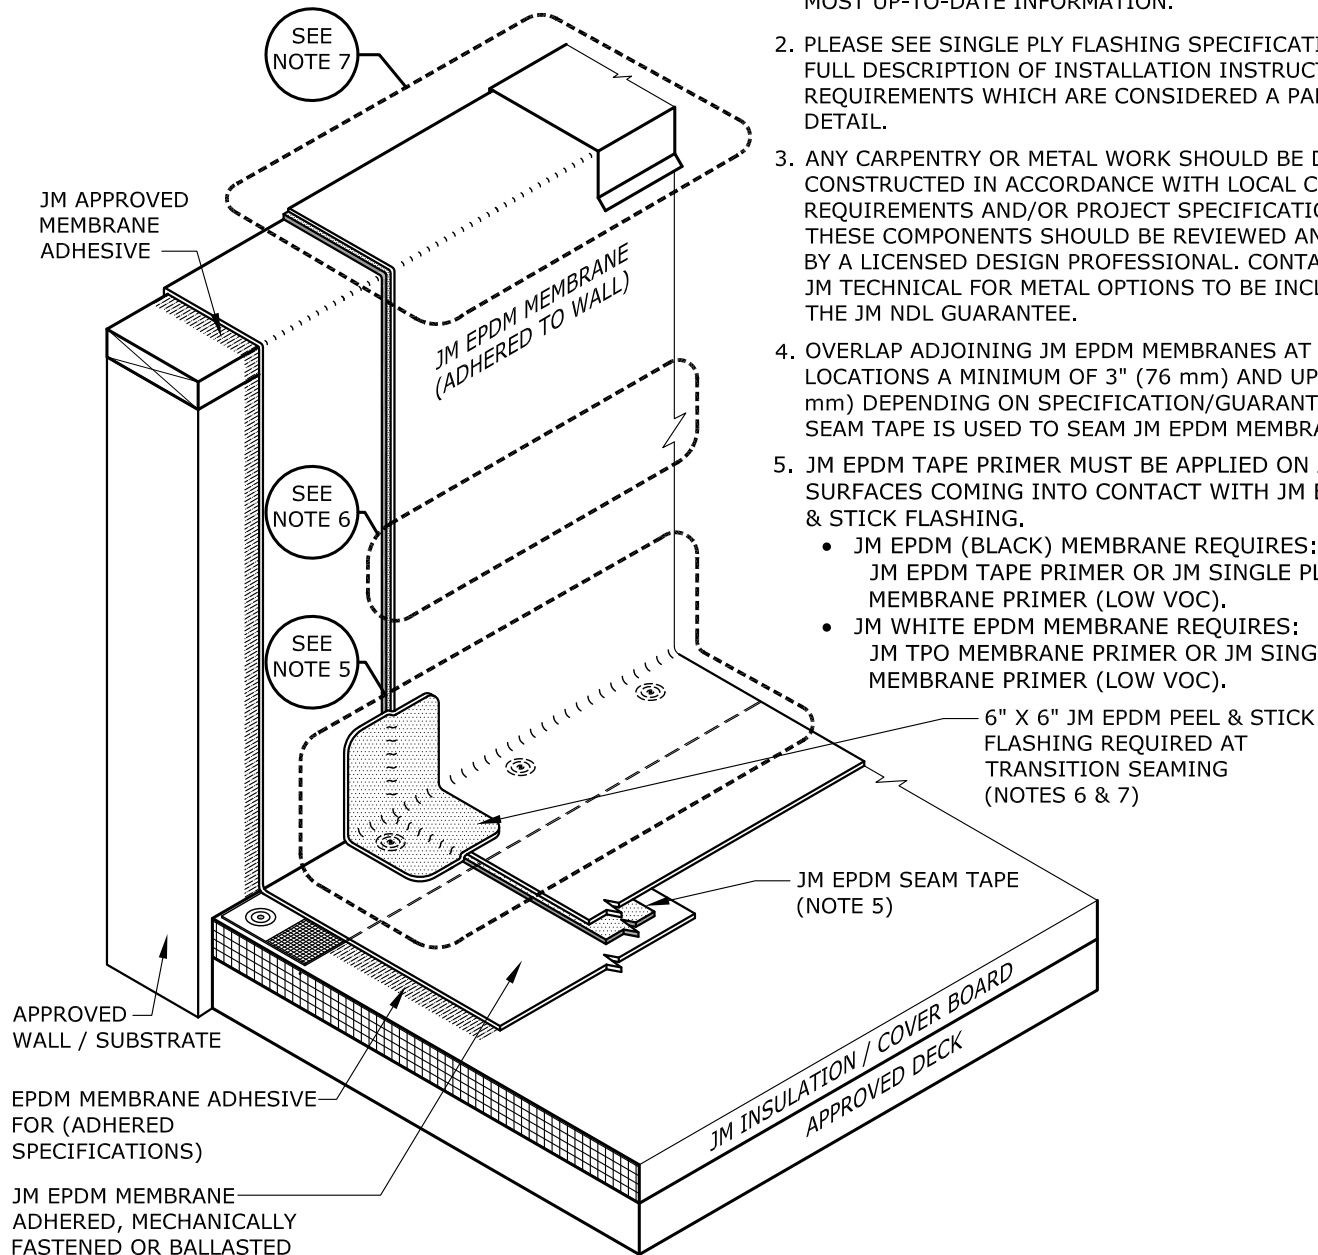

NOTES CONTINUED:

6. JM EPDM (BLACK) PEEL & STICK PRODUCTS: SPREAD JM EPDM TAPE PRIMER OR JM SINGLE PLY MEMBRANE PRIMER (LOW VOC) BEYOND EDGE.
7. JM WHITE EPDM PEEL & STICK PRODUCTS: SPREAD JM TPO MEMBRANE PRIMER OR JM SINGLE PLY MEMBRANE PRIMER (LOW VOC) BEYOND EDGE.
8. FOR JM APPROVED BASE FLASHING FASTENING METHODS SEE E-FW-B DETAILS.
9. FOR JM APPROVED INTERMEDIATE FLASHING FASTENING METHODS SEE E-FW-I DETAILS. MINIMUM FLASHING TERMINATION HEIGHT IS 8" (203 mm) ABOVE ROOF SURFACE ON ANY JM APPROVED SUBSTRATE, IE: PLYWOOD, SECURROCK® GYPSUM-FIBER, AND DENSDECK®.
10. FOR JM APPROVED TOP OF WALL FLASHING METHODS SEE E-FW-T DETAILS.
11. ON RE-ROOFING PROJECTS, AN APPROVED ASPHALT BARRIER MUST BE INSTALLED OVER THE EXISTING SUBSTRATE TO FULLY SEPARATE THE JM EPDM FLASHING MEMBRANE FROM ANY INCOMPATIBLE MATERIALS.
12. REINFORCED JM EPDM MEMBRANE IS REQUIRED FOR MECHANICALLY FASTENED INSTALLATIONS.
13. SEE DETAILS E-MS-03 & E-MS-04 FOR 25 & 30 YEAR MEMBRANE SIDE LAP & T-JOINT FASTENING METHODS.

DRAWING NO.

E-FW-M11

FLASHING WALL

SCALE

N.T.S

ISSUE DATE

02-15-24

JM EPDM BASE & WALL FLASHING WITH COPING ISOMETRIC VIEW

MEMBRANE TYPE:

JM EPDM / JM WHITE EPDM

MAXIMUM GUARANTEE TERM:

30 YEAR

Johns Manville is a manufacturer of commercial roofing products and offers this general conceptual information to you as a courtesy for general educational purposes only. This complimentary assistance is not to be either used or relied upon by anyone as a substitute for professional engineering design and documentation required by any building code, contract, or applicable law. By accepting the general conceptual information, you agree it does not constitute any representations, endorsements of, or an assumption by Johns Manville of any duty or liability for either the adequacy of the design of a building, any of its components or the sufficiency of any construction.

