


SLIDE FACEPLATE OVER SCUPPER SLEEVE (SEE SECTION BELOW)

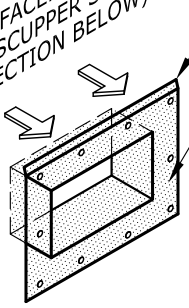

FACEPLATE ON EXTERIOR WALL


TOP HEM FILLED WITH CAULK, SEAL ALL SIDES  
 GALVANIZED METAL FACE PLATE INSTALLED OVER SCUPPER SLEEVE PINNED & SEALED TO EXTERIOR WALL

ATTACH AND TERMINATE WALL FLASHING ACCORDING TO WALL DETAIL  
 JM TPO WALL FLASHING  
 HEAT WELDS 1 1/2" MIN.  
 JM TPO REINFORCED TARGET PATCH OVER SCUPPER  
 JM TPO DETAIL MEMBRANE PATCHES, SHAPED & HEAT WELDED OVER ALL 4 CORNERS OF TPO TARGET PATCH  
 JM TPO EDGE SEALANT (TYP.) ALONG ALL TPO MEMBRANE FLASHING EDGES IF REQUIRED

BACKER ROD & CAULK AT ALL 4 SIDES OF SLEEVE  
 SCUPPER SLEEVE THROUGH WALL  
 BOTTOM HEM  
 FASTEN SCUPPER TO WALL THROUGH JM TPO WALL FLASHING (NOT SHOWN)  
 WOOD NAILER SECURED TO DECK UNDER SCUPPER FLANGE. ADD WOOD UNDER FLANGE AND CORED HOLE AS REQUIRED

JM TAPERED EDGE STRIPS  
 NAIL SCUPPER FLANGE THROUGH FIELD MEMBRANE INTO WOOD NAILER BELOW WITH RING SHANK NAILS 3" (76 mm) O.C. STAGGERED

JM SINGLE PLY LVOC CAULK  
 FASTENER  
 FACEPLATE  
 RIVETS  
 BACKER ROD AND CAULK  
 BOTTOM HEM

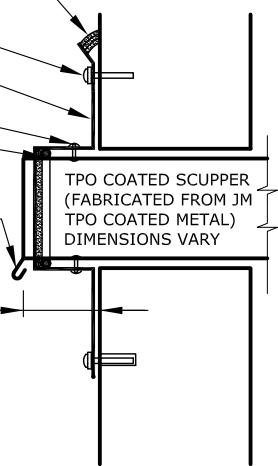

AS SPECIFIED

SCUPPER SECTION AT EXTERIOR WALL

NOTES:

1. REFER TO JOHNS MANVILLE WEBSITE ([www.jm.com](http://www.jm.com)) FOR MOST UP-TO-DATE INFORMATION.
2. PLEASE SEE SINGLE PLY FLASHING SPECIFICATIONS FOR A FULL DESCRIPTION OF INSTALLATION INSTRUCTIONS AND REQUIREMENTS WHICH ARE CONSIDERED A PART OF THIS DETAIL.
3. ANY CARPENTRY OR METAL WORK SHOULD BE DESIGNED AND CONSTRUCTED IN ACCORDANCE WITH LOCAL CODE REQUIREMENTS AND/OR PROJECT SPECIFICATIONS. THESE COMPONENTS SHOULD BE REVIEWED AND APPROVED BY A LICENSED DESIGN PROFESSIONAL.
4. JM TPO EDGE SEALANT IS REQUIRED ON ALL CUT OR NON-ENCAPSULATED EDGES OF REINFORCED MEMBRANE. THIS INCLUDES FACTORY CUT MEMBRANE (SEE DETAIL T-MS-01)

DRAWING NO.	
<b>T-DV-04</b>	
REPLACES TF-58A	
SCALE	ISSUE DATE
N.T.S	11-17-16

<b>PRIMARY SCUPPER WITH TAPERED INSULATION SUMP</b>	
MEMBRANE TYPE: JM TPO	
<p>Johns Manville is a manufacturer of commercial roofing products and offers this general conceptual information to you as a courtesy. This complimentary assistance is not to be used or relied upon by anyone as a substitute for professional engineering design and documentation required by building code, contract, or applicable law. By accepting these comments you agree they do not constitute any representations, endorsements of, or an assumption by Johns Manville of any liability for either the adequacy of the design of this building or any other material not supplied by Johns Manville.</p>	
MAXIMUM GUARANTEE TERM: 20 YEAR	

