



ENRGY 3[®] HD


A DURABLE, LIGHTWEIGHT, VERSATILE OPTION FOR MECHANICALLY ATTACHED MEMBRANES



THE PERFECT COVER BOARD FOR YOUR NEXT SINGLE PLY PROJECT

HIGH DENSITY

At 80 psi, ENRGY 3[®] HD offers high compressive strength and impact resistance. A great lightweight option for fast and easy installation.

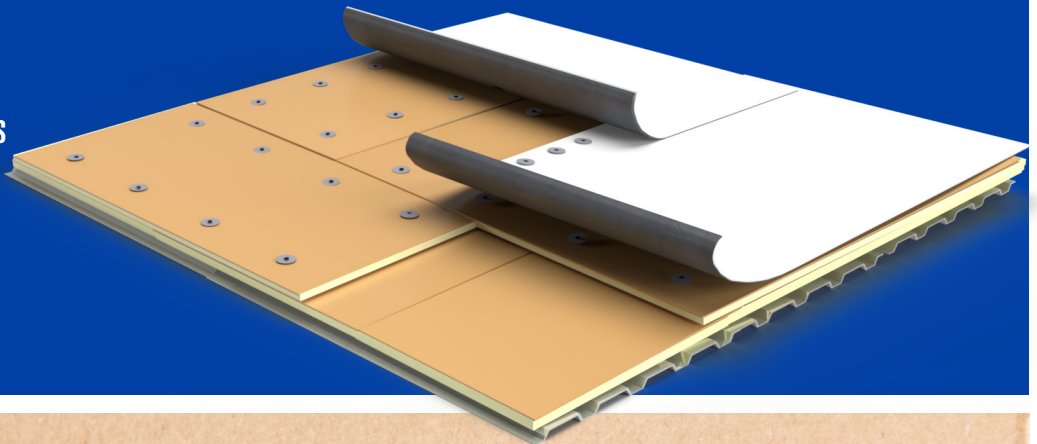

WHY CHOOSE ENRGY 3[®] HD?

USER-FRIENDLY

ENRGY 3[®] HD allows easy and efficient scoring, cutting, and snapping. Contractors can achieve precise fabrication in a low-dust environment.

LIGHTWEIGHT

Offers installation efficiencies where labor and weight are a concern. More square footage per truck and easier hoisting, staging, and maneuvering around the roof.

SUPERIOR R-VALUE

With an R-Value of 2.5 this board provides additional thermal insulation (R-Value) compared to wood fiber or gypsum.