



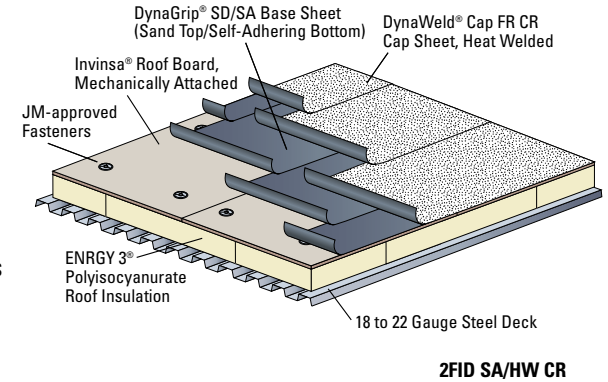

# SBS Systems – Self Adhered

- No impact on indoor air quality so occupied buildings can be re-roofed without disruption to occupants – ideal for schools, hospitals and office buildings.
- Fast, clean installation with less waste – no buckets – and an aesthetically pleasing finished product.
- PermaFlash® System allows penetration flashing to be included in the guarantee.
- Ideal for areas where roof access and staging is limited.

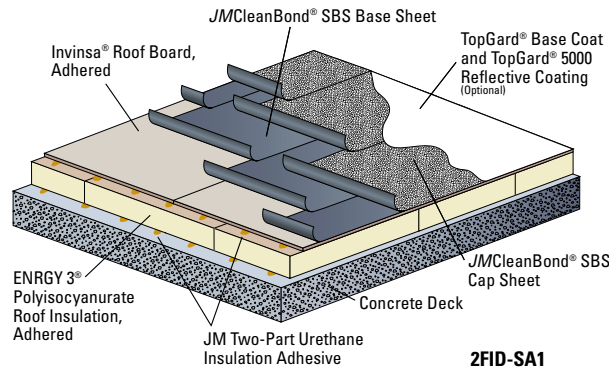

## FM Global® Approvals

Note: Illustrations do not directly represent any code approvals below.

Deck	Wind Uplift (psf)	Insulation First Layer		Cover Board		Specification	Membrane	RoofNav <sup>SM</sup> Number*
		Product	Attachment Method [Rate]	Product	Attachment Method [Rate]			
Steel	90	E	UF [1 per 2 ft <sup>2</sup> (0.19 m <sup>2</sup> )]	-	-	2FID-SA	CBB, CBC	77923-77921-0
	90	E	UF [1 per 2 ft <sup>2</sup> (0.19 m <sup>2</sup> )]	-	-	2FID-SA/HW	DG, DWC CR	137158-137159-0
Concrete	90	E	MBR BA [1.5 gal/sq (6.01 l/m <sup>2</sup> )]	-	-	2FID-SA/HW	DG, DWC CR	202846-137159-0

Insulation  
E = ENRGY 3

Fastener and Plate  
UF = UltraFast®

Adhesive  
MBR BA = MBR Bonding Adhesive

Membrane  
CBB = JMCleanBond Base  
CBC = JMCleanBond Cap  
DG = DynaGrip SD/SA  
DWC CR = DynaWeld Cap FR CR

Notes  
1. Consult specific RoofNav assembly for construction detail.  
2. Deck must be FM Global approved.  
3. Some assemblies require Grade E (80 ksi) steel and/or additional deck securement.

\*RoofNav numbers shown in this table are representative only and do not identify all membrane systems available.

FM Global, RoofNav and Securock are among the trademarks or registered trademarks of Factory Mutual Insurance Company, FM Approvals LLC and United States Gypsum Corporation, respectively.



JM systems meet many of the requirements for today's important building codes, approval and certifications; however, not all systems meet all requirements. For detailed information on a specific roofing system, please contact your JM Sales Representative or visit us at [www.jm.com/roofing](http://www.jm.com/roofing).

JM offers up to 30-year Peak Advantage® Guarantees for new construction, complete tear-off or re-cover applications.

