

TAPERED POLYISO INSULATION


Panel Designation	Slope (in./ft)	Dimension (in.)		LTTR* Value Nominal	Pieces per Unit	Square Feet per Unit	Board Feet per Unit	Slope Profiles
		Thin	Thick					
1/16 in./ft (5.2 mm/m)								
1A	1/16	0.5	0.75	3.6	70	1,120	700	
1B	1/16	0.75	1	5.0	50	800	700	
1	1/16	1	1.25	6.4	38	608	684	
2	1/16	1.25	1.5	7.8	32	512	704	
3	1/16	1.5	1.75	9.3	28	416	676	
4	1/16	1.75	2	10.7	22	352	660	
5	1/16	2	2.25	12.1	20	320	680	
6	1/16	2.25	2.5	13.6	18	288	684	
1/8 in./ft (10.4 mm/m)								
AA	1/8	0.5	1	4.3	64	1,024	768	
A	1/8	1	1.5	7.1	38	608	760	
B	1/8	1.5	2	10.0	26	416	728	
C	1/8	2	2.5	12.9	20	320	720	
D**	1/8	2.5	3	15.9	16	256	704	
E**	1/8	3	3.5	18.9	14	224	728	
F**	1/8	3.5	4	22.1	12	192	720	
FF**	1/8	4	4.5	25.3	10	160	680	
R	1/8	0.75	1.25	5.7	44	704	704	
S	1/8	1.25	1.75	8.6	30	480	720	
T	1/8	1.75	2.25	11.4	22	352	704	
U	1/8	2.25	2.75	14.4	16	256	640	
V	1/8	2.75	3.25	17.4	14	224	672	
W	1/8	3.25	3.75	20.5	12	192	672	
3/16 in./ft (15.6 mm/m)								
J	3/16	1	1.75	7.8	32	512	704	
K	3/16	1.75	2.5	12.1	20	320	680	
L**	3/16	2.5	3.25	16.6	16	256	736	
M**	3/16	3.25	4	21.2	12	192	696	
JJ	3/16	0.5	1.25	5.0	52	832	728	
KK	3/16	1.25	2	9.3	28	448	728	
LL**	3/16	2	2.75	13.6	18	288	691	
MM**	3/16	2.75	3.5	18.2	14	224	694	
1/4 in./ft (20.8 mm/m)								
G	1/4	1	2	8.6	30	480	720	
H	1/4	2	3	14.4	18	256	640	
I**	1/4	3	4	20.5	12	192	672	
X	1/4	0.5	1.5	5.7	48	768	768	
Y	1/4	1.5	2.5	11.4	24	384	768	
Z**	1/4	2.5	3.5	17.4	16	256	768	
ZZ**	1/4	3.5	4.5	23.6	12	192	768	
3/8 in./ft (31.2 mm/m)								
SS	3/8	0.5	2	7.1	36	576	720	
TT**	3/8	2	3.5	15.9	16	256	704	
1/2 in./ft (41.6 mm/m)								
Q	1/2	0.5	2.5	8.6	32	512	768	
QQ**	1/2	2.5	4.5	20.5	12	192	672	
XX	1/2	1	3	11.4	22	352	704	

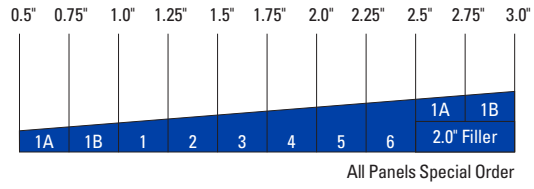


All Panels Special Order

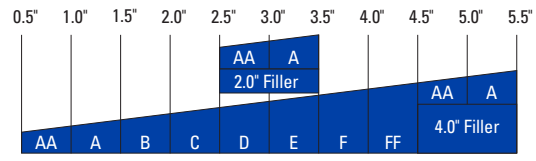


Extended and Special Order Panels: D, E, F, FF

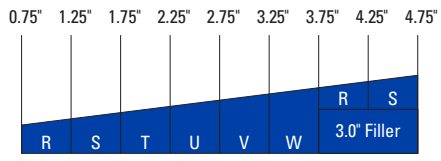


All Panels Special Order




All Panels Special Order




All Panels Special Order




Extended and Special Order Panels: Z, ZZ




All Panels Special Order



All Panels Special Order



Extended and Special Order Panels: QQ



Special Order

* (hr•ft²•°F/Btu)
Please refer to the Tapered ENRGY 3® data sheet for typical physical properties.

** Extended panels require less adhesive and less labor.

RS-5559 4-24 (Replaces 4/22)