

Features and Components

The UltraFast Fastener is a #12, case-hardened steel, polymer-coated fastener with a buttress thread design that provides maximum pullout values and minimizes fastener backout. Available with either a #3 Phillips head or a ¼" (6.35 mm) hex head. The drill point is designed for quick installation in new or re-roof applications, and provides exceptional drilling capability in higher tensile decks.

Use: Insulation

Material: Fasteners - Case-Hardened Steel, Polymer-Coated


Gauge: #12

Head: #3 Phillips Head or ¼" (6.35 mm) Hex Head

Color: Blue

Deck Types: Wood or 18 - 24 gauge (1.25 mm - 0.51 mm) Metal

Coating: CR-10 corrosion resistant factory applied coating passes the corrosion requirements of FM 4470 and ETAG 006

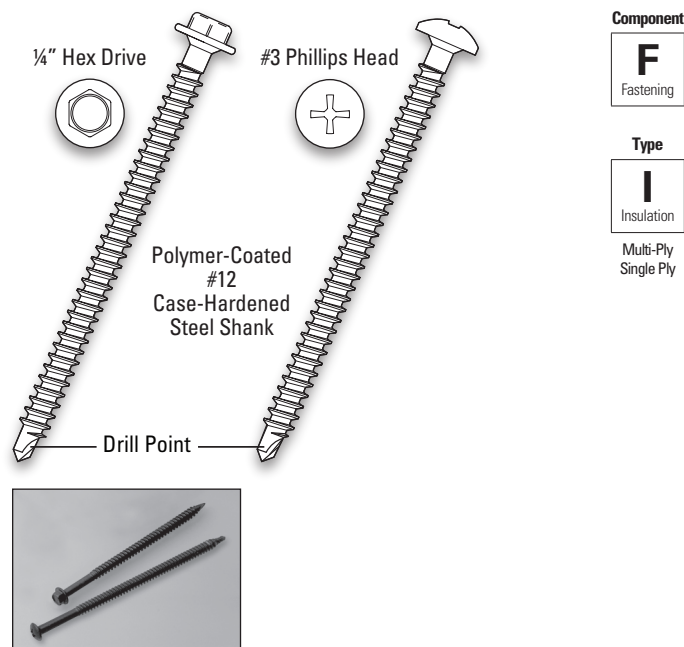

System Compatibility This product may be used as a component in the following systems. Please reference product application for specific installation methods and information.

Multi-Ply	BUR		APP			SBS			
	HA	CA	HW	HA	CA	HW	SA	MF	
Use to fasten insulation in all multi-ply systems									

Single Ply	TPO				PVC			EPDM		
	MF	AD	SA	IW	MF	AD	IW	MF	AD	BA
Use to fasten insulation in the selected single ply systems above										

Key: HA = Hot Applied CA = Cold Applied HW = Heat Weldable SA = Self Adhered MF = Mechanically Fastened IW = Induction Weld BA = Ballasted AD = Adhered

Energy and the Environment

Recycled Content	This steel based product contains a minimum of 25% post consumer recycled materials by weight
------------------	---

Peak Advantage® Guarantee Information

Systems
Approved to use with any Peak Advantage Guarantee

Codes and Approvals*



*Fastener approvals are based on system approvals

Technical specifications as shown in this literature are intended to be used as general guidelines only. Please refer to the Safety Data Sheet and product label prior to using this product. The Safety Data Sheet is available by calling (800) 922-5922 or on the web at www.jm.com/roofing. The physical and chemical properties of the product listed herein represent typical, average values obtained in accordance with accepted test methods and are subject to normal manufacturing variations. They are supplied as a technical service and are subject to change without notice. Check with the regional sales representative nearest you for current information.

All Johns Manville products are sold subject to Johns Manville's standard Terms and Conditions, which includes a Limited Warranty and Limitation of Remedy. For a copy of the Johns Manville standard Terms and Conditions or for information on other Johns Manville roofing products and systems, visit www.jm.com/terms-conditions.

Installation/Application

Refer to the application instructions guidelines for proper utilization of this product.

Packaging and Dimensions

Fastener Sizes	Quantity/Container
1½" to 8" (41.28 mm to 203.2 mm) (1) #3 Phillips bit in each pail (1) ¼" (6.35 mm) hex head bit per 3 pails	1,000/pail
Producing Locations*	Agawam, MA and Itasca, IL

* The point of manufacture for fasteners and plates varies depending on the specific part. Call your local JM sales professional for assistance.



UltraFast® Fasteners

Case-Hardened Steel, Polymer-Coated Fasteners

Product Specifications

Product Description	Part Length		Shank Length		Thread Length	
	(inches)	(mm)	(inches)	(mm)	(inches)	(mm)
ULTRAFast PHILLIPS 1-5/8" 1000/BX	1 5/8	41.3	0	0	FULL	FULL
ULTRAFast PHILLIPS 2-1/4" 1000/BX	2 1/4	57.2	0	0	FULL	FULL
ULTRAFast PHILLIPS 3" 1000/BX	3	76.2	0	0	FULL	FULL
ULTRAFast PHILLIPS 4" 1000/BX	4	101.6	1	25.4	3	76.2
ULTRAFast PHILLIPS 5" 1000/BX	5	127	2	50.8	3	76.2
ULTRAFast PHILLIPS 6" 1000/BX	6	152.4	2	50.8	4	101.6
ULTRAFast PHILLIPS 7" 1000/BX	7	177.8	3	76.2	4	101.6
ULTRAFast PHILLIPS 8" 1000/BX	8	203.2	4	101.6	4	101.6