

MultiStar® 264

Product description:

MultiStar® 264 is an assembled roving manufactured with continuous glass fibers of defined diameter into a cylindrical roving package with silane based sizing. It is characterized by excellent choppability, easy wet-out and very good impregnation through optimum fiber distribution.

MultiStar® 264 is used for low shrink and low profile Sheet Molding Compound (SMC) applications based on polyester resin where high mechanical performance is required. SMC can be used in a broad range of applications in transportation, electrical and electronics, building and construction applications. SMC composites are sustainable and recyclable with very low environmental impact.

Resin compatibility:

- Unsaturated polyester resin

Benefits:

- Improved unwinding and choppability
- Excellent mechanical performance
- Easy wet-out and impregnation
- Very good fiber distribution
- Low static loading
- Suitable for Multi-Purpose SMC
- Unique reinforcement for SMC in food contact applications which comply with Regulation (EC) N° 1935/2004.

Please contact us for further details.



Designation: Glass type is E-Glass

JM Designation	Region	Roving bundle linear density (tex)	Sizing content (%)	Moisture content Max.(%)	Strand linear density Tex (g/km)	Stiffness minimum (mm)
MultiStar® 264 4800 80	EU	4800	1.15	0.15	80	130
MultiStar® 264 2400 80	EU	2400	1.15	0.15	80	130

Bobbin dimensions:

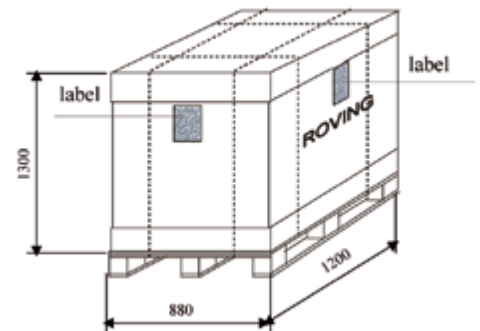
Region	JM Designation	Typical weight (kg)	Inner diameter (mm)	Outer diameter (mm)	Height (mm)	Bobbin wrap
EU	All MultiStar® 264 Types	20	77	280	270	Shrink film

Packaging:

Region	JM Designation	Packaging type	Pallet dimensions (mm)	Net weight per pallet (kg)	Bobbins per pallet
EU	All MultiStar® 264 Types	Cardboard box	1200 x 880	980	48
			1180 x 1180	1380	64

Storage:

These products should be stored in original packaging in dry, roofed, dust free storehouses. The recommended temperature is between 10°C to 30°C (50°F to 86°F) at relative air humidity between 50% to 75%. The products should remain in the original packaging and be conditioned in the work area for a minimum of 24 hours prior to use. The pallets should be single stacked unless otherwise specified on the packaging unit.

**Values:**

All data represent typical average values.

Warranty disclaimer :

The physical (or chemical) properties of Johns Manville products represent typical average values obtained in accordance with accepted test methods at the time of manufacture and are subject to normal manufacturing variations. They are supplied as a technical service and are subject to change without notice. Check the Johns Manville office to assure current information. For a copy of the Johns Manville Limited Warranty and Limitation of Remedy or other product information, contact your local Sales Representative.

**US Headquarters**

Johns Manville
717 17th Street
Denver, CO 80202 - USA
Phone: +1 (303) 978 2000

Customer-Service-Offices:**North America**

Johns Manville
7500 Dutch Road
Waterville, OH 43566 - USA
Phone: +1 (800) 554 4826
Fax: +1 (419) 878 1538

Europe

Johns Manville Slovakia, a.s.
Strojárska 1
91799 Trnava - Slovakia
Phone: +421 (0) 33 5918 249
Contact: fibers@jm.com

www.jm.com